

DMX SERIES OUTDOOR LIGHTING

DMX-FLS-72W-RGBW-BT-BK
DMX 512 COMPATIBLE RGBW SQUARE FLOOD LIGHT




Customer Name: _____

Project Name: _____

Note: _____ Type: _____

Selection:

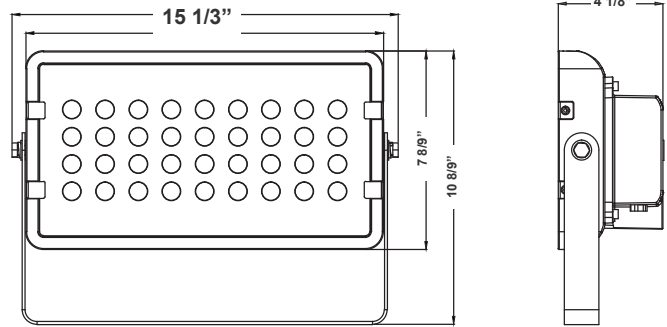

10 8/9"(H) x 15 1/3"(W) x 4 1/8"(D)

The fixture has classic traditional appearance, professional light distribution design, 60-degree beam angle, ideal for park landscaping, garden, architectural landscape lighting, suitable for wet locations

Features

- Die-cast Aluminum Housing with Powder Coat Finish
- Adjustable Yoke Bracket
- 7-Year Warranty
- Lens Type: Plaid Tempered Glass + Aluminum Reflectors

Technical Specifications

Electrical:

- Voltage: 120-277V
- Power Factor: >0.9
- Wattage: 72W
- Efficacy: 44 LPW
- Operating Voltage: Max 900 mA, Max 36VDC
- In A DMX Lighting Setup, Lights Need To Be Connected With cables. The Cables Can Be "Daisy Chained" So That Each Light Can Plug Into The One Before It Instead Of All Lights Plugging Into The DMX Board Itself

Mechanical:

- Die-cast Aluminum Housing with Powder Coat Finish
- Solid State Lighting Technology for Long Life, No Maintenance Needed and High-Efficiency
- Lens Type: Plaid Tempered Glass + Aluminum Reflectors
- High Conductive Aluminum LED Board
- Adjustable Yoke Bracket
- Operating Temperature: -40°F to 104°F
- IP Rating: IP65, Suitable for Wet Locations
- 7-Year Warranty

Lighting:

- Dimming: Dimmable Through Phone App
- Total Lumens: 1300LM (Warm White) 3200LM (Cool White)
- Color Temperatures: RGBW Seletable Through DMX Controller
- Color Rendering Index: CRI ≥ 80
- Beam Angle: 60°

Applications:



- The fixture has classic traditional appearance, professional light distribution design, 90-degree beam angle, ideal for park landscaping, garden, architectural landscape lighting, suitable for wet locations

Other Models:


- 96W | 4800LM | DMX-FLS-96W-RGBW-BT-BK



Photometrics: DMX-FLS-72W-RGBW-BT-BK

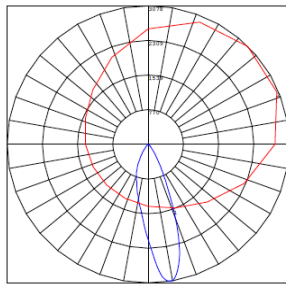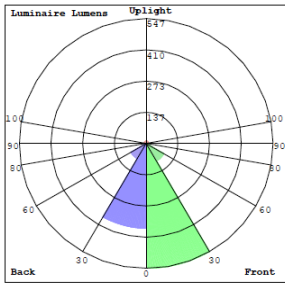

BUG Rating: B1-U1-G0

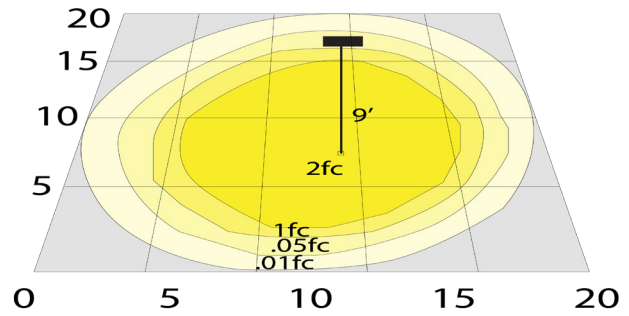

72W White, Area 20' x 20' Mounting Height: 9'

Other Views:



Side View



Front View



Back View

Performance Table: DMX-FLS-72W-RGBW-BT-BK

| MODEL NO. | Wattage | Voltage | Lumens | Color Temp. | BUG Rating | LPW |
|------------------------|---------|----------|---|-------------|------------|-----|
| DMX-FLS-72W-RGBW-BT-BK | 72W | 120-277V | 1300LM (Single White) 3200LM (Maximum Power) | RGBW | B1-U1-G0 | 44 |

Sample Ordering

| Model | Flood Light | Watt | Color Temp. | Color | |
|-------|-------------|------|-------------|-------|----|
| DMX | FLS | 72W | RGBW | BT | BK |

Accessories:

Blank = No Option For Accessories

DMX-FLS-SH1 = HALF GLARE SHIELD FOR TC-FLS-96W & DMX-FLS-36W/72W/96W

DMX-FLS-SHFG1 = FULL GLARE SHIELD FOR TC-FLS-96W & DMX-FLS-36W/72W/96W

ACCESSORIES:



DMX-FLS-SH1

Half Glare Shield for
TC-FLS-96W &
DMX-FLS-36W/72W/96W



DMX-FLS-SHEG1

Full Glare Shield for
TC-FL-96W &
DMX-FL-36W/72W/96W

