


JOB NAME: \_\_\_\_\_

DATE: \_\_\_\_\_

TYPE: \_\_\_\_\_

**DIMENSIONS:**

3.7"(H) x 11" (Diameter)

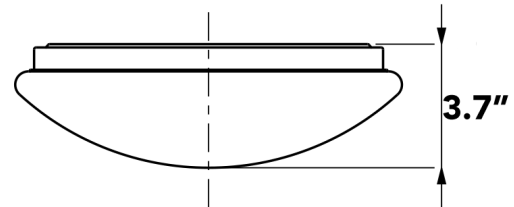

**FCR-11-12W-40K**

**LED CLOUD FIXTURES**

Ideal for New as well as old residential and commercial constructions.

**ELECTRICAL SPECIFICATIONS:**

- Voltage: 120VAC
- Wattage: 15W
- Power factor: >0.90
- Efficacy: 73LM/W

**HOUSING SPECIFICATIONS:**

- 1" deep
- Steel base with white powder coat finish
- PMMA Lens material
- closed cell Neoprene foam gasket
- Maximum Ambient Temperature: 104°F
- Suitable for damp locations when gasket is used

MODEL	WATTS	VOLTAGE	LUMENS	COLOR TEMP
FCR-11-12W-40K	15W	120VAC	1100LM	4000K

**LIGHTING SPECIFICATIONS:**

- Dimmable: Dimmable down to 10% using an approved dimmer
- LED: Seoul DOB (Driver On Board) Technology
- Optics: White translucent acrylic
- Total lumens: 1100LM
- Color temperature: 4000K
- Color rendering index: >80

**WARRANTY: 5 years**

**CERTIFICATIONS: ETL,ES**

