

JOB NAME: _____


DATE: _____

TYPE: _____



DIMENSIONS:

3-1/2" (H) X 14" (D)

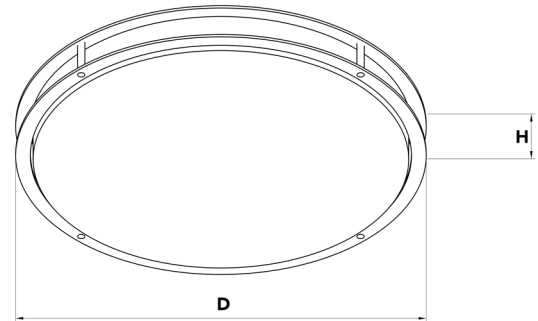

FDL-14-20W-40K

LED DRUM FIXTURES

The LED Flush Mount Surface Fixture is a low profile downlight intended for ceiling or wall mount applications. Driver on Board (DOB) technology, with no driver or transformer needed. These flush mount ceiling lights mount directly to a 4" deep dish junction box. Ideal for Residential and commercial applications.

ELECTRICAL SPECIFICATIONS:

- Voltage: 120VAC
- Wattage: 20W
- Power factor: >0.90
- Efficacy: 70LM/W

HOUSING SPECIFICATIONS:

- Construction: Spun aluminum (brushed nickel finish)
- Gasket: closed cell Neoprene foam gasket
- Suitable for damp locations when gasket is used
- Maximum Ambient temperature: 104°F

CERTIFICATIONS: ETL



MODEL	WATTS	VOLTAGE	LUMENS	COLOR TEMP
FDL-14-20W-40K	20W	120VAC	1400LM	4000K

LIGHTING SPECIFICATIONS:

- Dimming: Dimmable down to 10% using an approved dimmer
- Optics: white translucent acrylic lens
- LED: Seoul DOB (Driver On Board) Technology
- Total lumens: 1400LM
- Color temperature: 4000k
- CRI: >80

WARRANTY: 5 years

