


FLDX-LG-30-50W-MCTP-BR
X-GEN BULLET FLOOD LIGHTS



Customer Name: _____
Project Name: _____
Note: _____ Type: _____

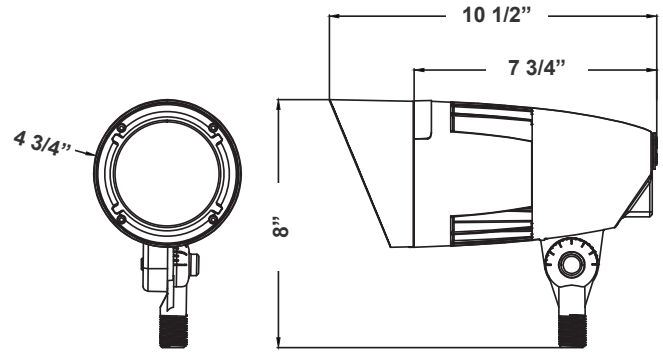

8"(H) x 10 1/2"(W) x 4 3/4"(D)

Ideal for general site lighting, alleys, loading docks, doorway, pathway, and parking areas. Great for use with motion sensors and another instant on/off controls.

Features

- Die-cast Aluminum Housing with Powder Coat Finish (Dark Bronze)
- 1/2" Threaded Knuckle Stem
- MCTP: Multi CCP and Power switches on the back of the fixture
- Lens Type: Plaid Tempered Glass + Aluminum Reflectors

Technical Specifications

Electrical:

- Voltage: 120-277V
- Power Factor: >0.9
- Wattage: 30W/40W/50W
- Efficacy: 120 LPW

Mechanical:

- Die-cast Aluminum Housing with Powder Coat Finish (Dark Bronze)
- Cord type: 18" SJTW 18/3 AWG cable
- 1/2" Threaded Knuckle Stem
- Operating Temperature: -40°F to 104°F
- IP Rating: IP65
- Suitable for Wet Locations
- 7-Year Warranty

Lighting:

- MCTP: Multi CCP and Power switches on the back of the fixture
- Lens Type: Plaid Tempered Glass + Aluminum Reflectors
- Total Lumens: 6200LM
- Color Temperatures: 3000K/4000K/5000K
- Color Rendering Index: CRI ≥ 80
- Beam Angle: 35°
- Lifespan: 70,000 Hrs.

Applications:




- Ideal for general site lighting, alleys, loading docks, doorway, pathway, and parking areas. Great for use with motion sensors and another instant on/off controls.

Other Models:

- 50W | 6200LM | FLDX-LG-30-50W-MCTP-BR



Photometrics: FLDX-LG-30-50W-MCTP-BR

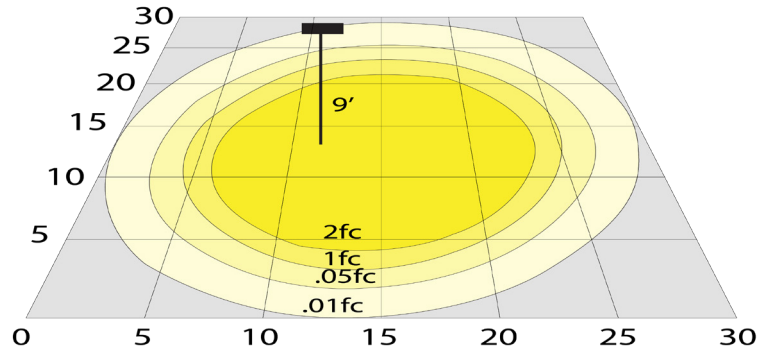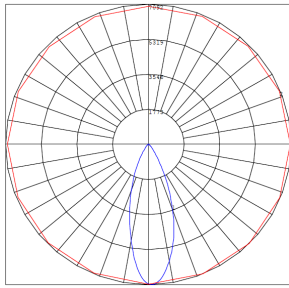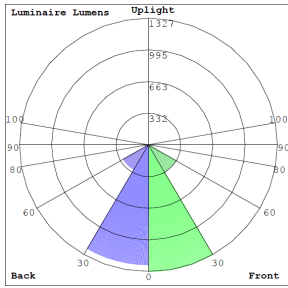

BUG Rating: B3-U0-G0

50W 3000K, Area 30'x 30' Mounting Height: 9'

Other Views:



Side View



Front View



Back View

Performance Table: FLDX-LG-30-50W-MCTP-BR

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
FLDX-LG-30-50W-MCTP-BR	30W 40W 50W	120-277V	6200LM	3000K 4000K 5000K	B3-U0-G0	120

Sample Ordering

Model	Size	Min. Watt	Max. Watt	Color Temp.	Finish
FLDX	LG	30	50W	MCTP	BR

ACCESSORY:

Blank = No Option For Accessories

FLDVX-FS-LG-BR = X-GEN BULLET REPLACEMENT FLAT SHROUD FOR LG SIZE HOUSING, BRONZE

FLDVX-LG-RL35 = X-GEN BULLET REPLACEMENT 35-DEGREE REPL. LENS FOR LG SIZE HOUSING

ACCESSORIES:



FLDVX-FS-LG-BR

X-GEN BULLET REPLACEMENT FLAT SHROUD FOR LG SIZE HOUSING, BRONZE

Example:

1. FLDX-LG-30-50W-MCTP-BR

(FOR FLDX 50W MCTP FIXTURE 120-277V)

2. FLDX-LG-30-50W-MCTP-BR
FLDVX-FS-LG-BR

(FOR FLDX 50W MCTP FIXTURE 120-277V)

(X-GEN BULLET REPLACEMENT FLAT SHROUD FOR LG SIZE HOUSING, BRONZE)

WESTGATE

Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com

