

FLDX SERIES OUTDOOR LIGHTING



FLDX-MD-10-30W-30K-BR
FLDX-MD-10-30W-40K-BR
FLDX-MD-10-30W-50K-BR
X-GEN BULLET FLOOD LIGHTS

WESTGATE
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

Customer Name: _____

Project Name: _____

Note: _____ Type: _____

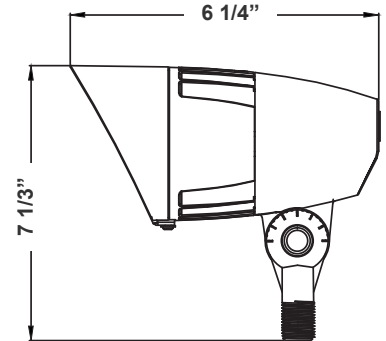

Ideal for general site lighting, alleys, loading docks, doorway, pathway, and parking areas. Great for use with motion sensors and another instant on/off controls.

7 1/3"(H) x 6 1/4"(W) x 4 1/3"(D)

Features

- Die-cast Aluminum Housing with Powder Coat Finish (Dark Bronze)
- 1/2" Threaded Knuckle Stem
- MP: Multi Power switch on the back of the fixture
- Lens Type: Plaid Tempered Glass + Aluminum Reflectors

Technical Specifications

Electrical:

- Voltage: 120-277V
- Power Factor: >0.9
- Wattage: 10W/20W/30W
- Efficacy: 120 LPW

Mechanical:

- Die-cast Aluminum Housing with Powder Coat Finish (Dark Bronze)
- Cord type: 18" SJTW 18/3 AWG cable
- 1/2" Threaded Knuckle Stem
- Operating Temperature: -40°F to 104°F
- IP Rating: IP65
- Suitable for Wet Locations
- 7-Year Warranty

Lighting:

- MP: Multi Power switch on the back of the fixture
- Lens Type: Plaid Tempered Glass + Aluminum Reflectors
- Total Lumens: 3700LM
- Color Temperatures: 3000K/4000K/5000K
- Color Rendering Index: CRI ≥ 80
- Beam Angle: 60°
- Lifespan: 70,000 Hrs.

Applications:

- Ideal for general site lighting, alleys, loading docks, doorway, pathway, and parking areas. Great for use with motion sensors and another instant on/off controls.

Other Models:

- 30W | 3700LM | FLDX-MD-10-30W-30K-BK
- 30W | 3700LM | FLDX-MD-10-30W-40K-BK
- 30W | 3700LM | FLDX-MD-10-30W-50K-BK





Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com




WG-07052022

Photometrics: FLDX-MD-10-30W-BR

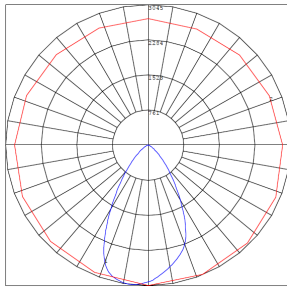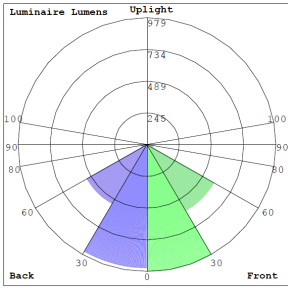

BUG Rating: B2-U0-G0

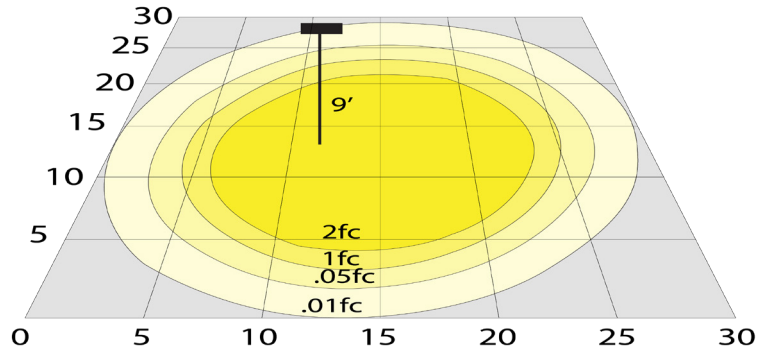

30W 3000K, Area 30'x 30' Mounting Height: 9'

Other Views:



Side View



Front View



Back View

Performance Table: FLDX-MD-10-30W-BR

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
FLDX-MD-10-30W-30K-BR	10W 20W 30W	120-277V	3700LM	3000K	B2-U0-G0	120
FLDX-MD-10-30W-40K-BR				4000K	B2-U0-G0	
FLDX-MD-10-30W-50K-BR				5000K	B2-U0-G0	

Sample Ordering

Model	Size	Min. Watt	Max. Watt	Color Temp.	Finish
FLDX	MD	10	30W		BR
				30K = 3000K 40K = 4000K 50K = 5000K	

ACCESSORY:

Blank = No Option For Accessories
 FLDVX-FS-MD-BR = X-GEN BULLET REPLACEMENT FLAT SHROUD FOR MD SIZE HOUSING, BRONZE
 FLDVX-MD-RL35 = X-GEN BULLET REPLACEMENT 35-DEGREE REPL. LENS FOR MD SIZE HOUSING

ACCESSORIES:



FLDVX-FS-MD-BR
 X-GEN BULLET REPLACEMENT FLAT SHROUD
 FOR MD SIZE HOUSING, BRONZE

Example:

1. FLDX-MD-10-30W-30K-BR (FOR FLDX 30W 30K FIXTURE 120-277V)
2. FLDX-MD-10-30W-30K-BR (FOR FLDX 30W 30K FIXTURE 120-277V)
 FLDVX-FS-MD-BR (X-GEN BULLET REPLACEMENT FLAT SHROUD FOR MD SIZE HOUSING, BRONZE)

