

FLDX SERIES OUTDOOR LIGHTING

FLDX-MD-15W-RGBW-BT-BR
RGBW BLUETOOTH WESTGATE APP BULLET, 120-277V

WESTGATE
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!





Customer Name: _____

Project Name: _____

Note: _____

Type: _____

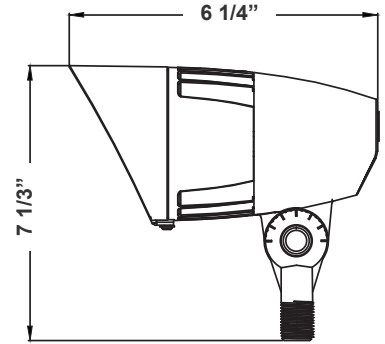

7 1/3"(H) x 6 1/4"(W) x 4 1/3"(D)

Ideal for general site lighting, alleys, loading docks, doorway, pathway, and parking areas. Great for use with motion sensors and another instant on/off controls.

Features

- Die-cast Aluminum Housing with Powder Coat Finish (Dark Bronze)
- 1/2" Threaded Knuckle Stem
- Lens Type: Plaid Tempered Glass + Aluminum Reflectors

Technical Specifications

Electrical:

- Voltage: 120-277V
- Power Factor: >0.9
- Wattage: 15W
- Efficacy: 48 LPW
- Bluetooth Connection Range: Approximately 30 feet (10 meters). Maximum Communication Range Will Vary Depending On Obstacles (Person, Metal, Wall, etc.) Or Electromagnetic Environment.

Mechanical:

- This Fixture is Bluetooth mesh Enabled. Bluetooth mesh networking enables many-to-many (m:m) device communications and is optimized for creating large-scale device networks. It is ideally suited for control monitoring and automation solutions that require tens, hundreds or thousands of devices to communicate with one another
- Die-cast Aluminum Housing with Powder Coat Finish (Dark Bronze)
- Cord type: 18" SJTW 18/3 AWG cable
- 1/2" Threaded Knuckle Stem
- Operating Temperature: -40°F to 104°F
- IP Rating: IP65
- Suitable for Wet Locations
- 7-Year Warranty

Lighting:

- Lens Type: Plaid Tempered Glass + Aluminum Reflectors
- Total Lumens: 720LM
- Color Temperatures: RGBW Seletable Trough Phone App
- Color Rendering Index: CRI ≥ 80
- Beam Angle: 60°
- Lifespan: 70,000 Hrs.

Applications:

- Ideal for general site lighting, alleys, loading docks, doorway, pathway, and parking areas. Great for use with motion sensors and another instant on/off controls.






Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com



WG-07052022

Photometrics: FLDX-MD-15W-RGBW-BT-BR

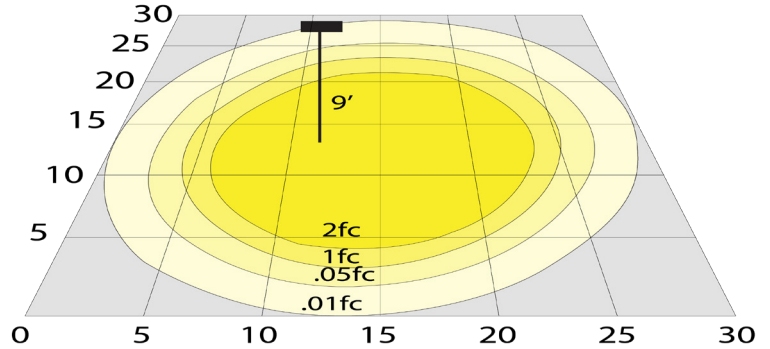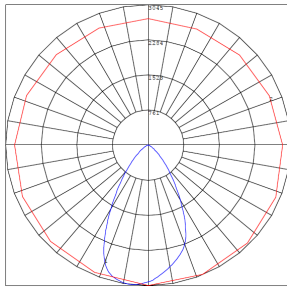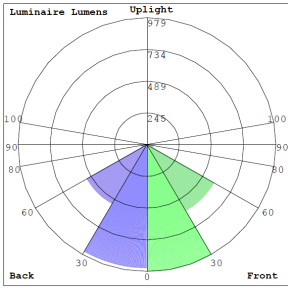

BUG Rating: B2-U0-G0

30W 3000K, Area 30'x 30' Mounting Height: 9'

Other Views:



Side View



Front View



Back View

Performance Table: FLDX-MD-15W-RGBW-BT-BR

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
FLDX-MD-15W-RGBW-BT-BR	15W	120-277V	720LM	RGBW	B2-U0-G0	48

Sample Ordering

Model	Size	Min. Watt	Color Temp.	Bluetooth	Finish
FLDX	MD	15	RGBW	BT	BR

ACCESSORY:

Blank = No Option For Accessories

FLDVX-FS-MD-BR = X-GEN BULLET REPLACEMENT FLAT SHROUD FOR MD SIZE HOUSING, BRONZE


FLDVX-MD-RL35 = X-GEN BULLET REPLACEMENT 35-DEGREE REPL. LENS FOR MD SIZE HOUSING

ACCESSORIES:



FLDVX-FS-MD-BR

X-GEN BULLET REPLACEMENT FLAT SHROUD FOR MD SIZE HOUSING, BRONZE

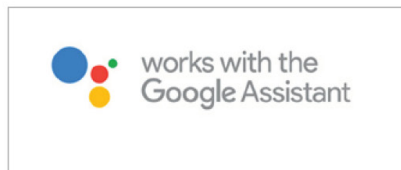

- For Setting Up The Light(s), Initial Internet Connection or Mobile Data Is Required.
- After the Initial Setup, Internet Connection is not Necessary Anymore. The lights Can Be Controlled with The Mobile App on The Phone or Tablet. Features Such as Dimming, Changing Colors, Lights Scenes, etc.
- Scheduling Feature Requires Internet Connection.
- Bluetooth Devices Need a Gateway (Sold Separately) In Order to Connect to WiFi Network (Internet)



Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com

