

# FLDX SERIES OUTDOOR LIGHTING

FLDX-SM-15W-30K-BK  
FLDX-SM-15W-40K-BK  
FLDX-SM-15W-50K-BK  
X-GEN BULLET FLOOD LIGHTS

**WESTGATE**  
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

Customer Name: \_\_\_\_\_



Project Name: \_\_\_\_\_

Note: \_\_\_\_\_

Type: \_\_\_\_\_



Selection:

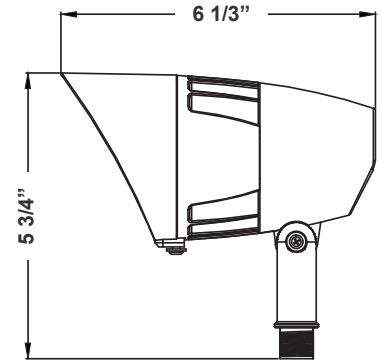

5 3/4"(H) x 6 1/3"(W) x 3 2/5"(D)

Ideal for general site lighting, alleys, loading docks, doorway, pathway, and parking areas. Great for use with motion sensors and another instant on/off controls.

## Features

- Die-cast Aluminum Housing with Powder Coat Finish (Black)
- 1/2" Threaded Knuckle Stem
- 7-Year Warranty
- Lens Type: Plaid Tempered Glass + Aluminum Reflectors

## Technical Specifications

### Electrical:

- Voltage: 120-277V
- Power Factor: >0.9
- Wattage: 15W
- Efficacy: 120 LPW

### Mechanical:

- Die-cast Aluminum Housing with Powder Coat Finish (Black)
- Cord type: 18" SJTW 18/3 AWG cable
- 1/2" Threaded Knuckle Stem
- Operating Temperature: -40°F to 104°F
- IP Rating: IP65
- Suitable for Wet Locations
- 7-Year Warranty

### Lighting:

- Lens Type: Plaid Tempered Glass + Aluminum Reflectors
- Total Lumens: 1800LM
- Color Temperatures: 3000K/4000K/5000K
- Color Rendering Index: CRI ≥ 80
- Beam Angle: 60°
- Lifespan: 70,000 Hrs.

### Applications:

- Ideal for general site lighting, alleys, loading docks, doorway, pathway, and parking areas. Great for use with motion sensors and another instant on/off controls.

### Other Models:

- 15W | 1800LM | FLDX-SM-15W-30K-BR
- 15W | 1800LM | FLDX-SM-15W-40K-BR
- 15W | 1800LM | FLDX-SM-15W-50K-BR





Phone: (877) 805-2252 | Fax: (877) 805-2252  
www.westgatemfg.com




WG-07052022

## Photometrics: FLDX-SM-15W-BK

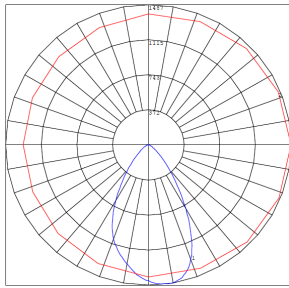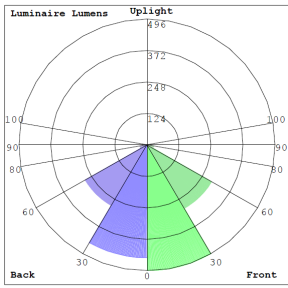

BUG Rating: B1-U0-G0

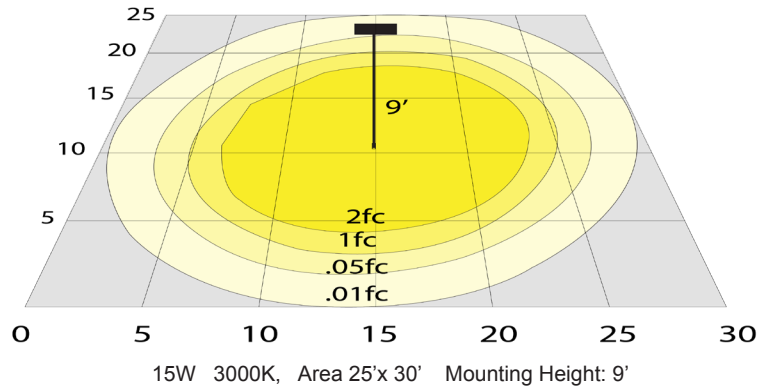

## Other Views:



Side View



Front View



Back View

## Performance Table: FLDX-SM-15W-BK

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
FLDX-SM-15W-30K-BK	15W	120-277V	1800LM	3000K	B1-U0-G0	120
FLDX-SM-15W-40K-BK	15W	120-277V	1800LM	4000K	B1-U0-G0	120
FLDX-SM-15W-50K-BK	15W	120-277V	1900LM	5000K	B1-U0-G0	120

## Sample Ordering

**Model**      **Size**      **Watt**      **Color Temp.**      **Finish**  
 -  -  -  -   
30K = 3000K  
40K = 4000K  
50K = 5000K

## ACCESSORY:

Blank = No Option For Accessories  
 FLDVX-FS-SM-BK = X-GEN BULLET REPLACEMENT FLAT SHROUD FOR SM SIZE HOUSING, BRONZE  
 FLDVX-SM-RL35 = X-GEN BULLET REPLACEMENT 35-DEGREE REPL. LENS FOR SM SIZE HOUSING

## ACCESSORIES:



**FLDVX-FS-SM-BK**  
 X-GEN BULLET REPLACEMENT FLAT SHROUD  
 FOR SM SIZE HOUSING, BLACK

## Example:

1. FLDX-SM-15W-30K-BK (FOR FLDX 15W 30K FIXTURE 120-277V)
2. FLDX-SM-15W-30K-BK (FOR FLDX 15W 30K FIXTURE 120-277V)  
 FLDVX-FS-SM-BK (X-GEN BULLET REPLACEMENT FLAT SHROUD FOR SM SIZE HOUSING, BRONZE)

