



JOB NAME: _____

DATE: _____

TYPE: _____

DIMENSIONS:

6"(L) X 2.8"(H) X 3.2"(W)

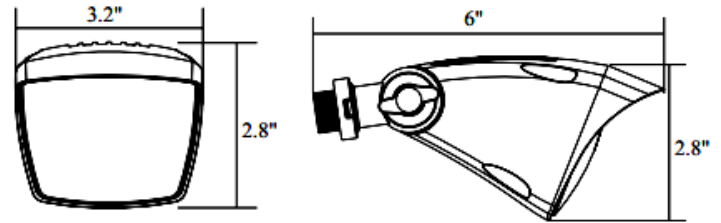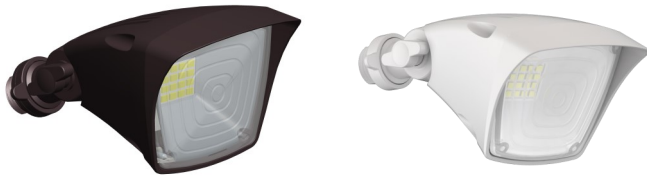

- FLH-10W-50K-BR**
- FLH-10W-30K-BR**
- FLH-10W-50K-WH**
- FLH-10W-30K-WH**

120V LED WEATHERPROOF FLOOD HEADS

A modern replacement for weatherproof PAR38 lamp holders and 100W quartz fixtures

ELECTRICAL SPECIFICATIONS:

- Voltage: 120~277VAC, 50/60 Hz
- Wattage: 10W
- Power factor: 0.95
- Efficacy: 95LM/W

HOUSING SPECIFICATIONS:

- Die-cast aluminum with powder coat finish
- White Reflector
- Rotating directional hood
- Lifespan: 70,000 hr.
- IP Rating: IP65, Suitable for Wet Locations

CERTIFICATIONS: ETL



| MODEL | WATTS | VOLTAGE | LUMENS | COLOR TEMP |
|----------------|-------|------------|--------|------------|
| FLH-10W-50K-BR | 10W | 120~277VAC | 950LM | 5000K |
| FLH-10W-30K-BR | 10W | 120~277VAC | 950LM | 3000K |
| FLH-10W-50K-WH | 10W | 120~277VAC | 950LM | 5000K |
| FLH-10W-30K-WH | 10W | 120~277VAC | 950LM | 3000K |

LIGHTING SPECIFICATIONS:

- Driver: Non-dimmable driver
- Source: COB
- Cover type: Transparent pc
- Total lumens: 950LM
- Cord type: 13" #18 AWG stranded wires
- Color temperature: 5000K/3000K
- Color rendering index: >80
- Beam Angle: 100°

WARRANTY: 7 years

