

FLH SERIES Outdoor Lighting


FLH-10W-30K-WH
FLH-10W-50K-WH
120V LED WEATHERPROOF FLOOD HEADS

WESTGATE
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

Customer Name: _____

Project Name: _____

Note: _____ | Type: _____

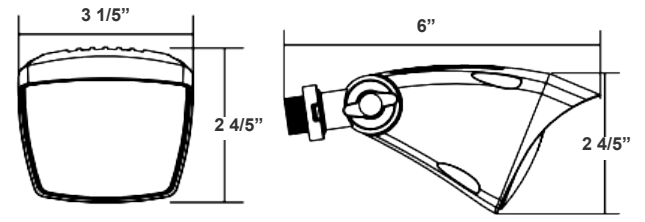

6" (L) X 2 4/5" (H) X 3 1/5" (W)

LED Security Head Suitable for Outdoor applications, Ideal for doorway, pathway and alleys and Great for use with optional motion sensors or photocell.

Features

- 7-Year Warranty
- Die-cast Aluminum, Powder Coated
- 1 Lamp Head
- Lifespan: 70000 Hrs.

Technical Specifications

Electrical:

- Voltage: 120-277V AC, 50/60Hz
- Wattage: 10W
- Power factor: 0.95
- Efficacy: 100 LM/W

Lighting:

- LED: SMD
- Lens Type: Transparent PC
- Color temperature: 3000K/ 5000K
- Total Lumens: 1000LM
- Color Rendering index: >80
- Beam Angle: 100°
- Lifespan: 70000 Hrs.

Mechanical:

- Die-cast Aluminum With Powder Coat Finish
- White Reflector
- 1 Lamp Head
- Cord type: 13" #18 AWG stranded wires
- Operating Temperature: -40°F~104°F
- Suitable for Wet Location
- 7-Year Warranty

Applications:

- Ideal for Ideal for doorway, pathway and alleys
- Great for use with optional motion sensors or photocell

Other Model:

- 10W | 1000LM | FLH-10W-50K-BR





Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com




WG-ZY-29-2Z

Photometrics: FLH-10W-WH



BUG Rating: B1-U1-G0

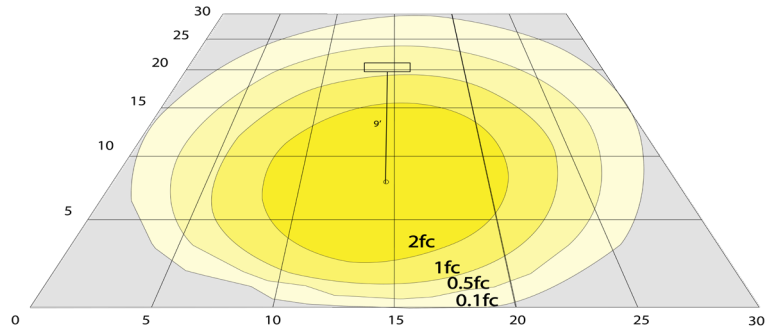

10W, 5000K Area 30'x 30' Mounting Height: 9'

Other Views:



Side View



Front View



Back View

Performance Table: FLH-10W-WH

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
FLH-10W-30K-WH	10W	120-277V	1000LM	3000K	B1-U1-G0	100
FLH-10W-50K-WH	10W	120-277V	1000LM	5000K	B1-U1-G0	100

Sample Ordering

Model	Min. Watt	Color Temp.	Housing
FLH	10W	<input type="text"/>	WH

30K = 3000K
50K = 5000K

Factory-Installed Options

Blank = No Option

Example:

1. FLH-10W-50K-WH

(For FLH 10W 5000K 50K fixture 120-277V)

