

# FLVX SERIES OUTDOOR LIGHTING

FLVX-MD-15W-RGBW-BT-BR  
RGBW BLUETOOTH WESTGATE APP BULLET, 12V



The fixture has classic traditional appearance, professional light distribution design, 90-degree beam angle, ideal for park landscaping, garden, architectural landscape lighting, suitable for wet locations


**WESTGATE**  
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

Customer Name: \_\_\_\_\_

Project Name: \_\_\_\_\_

Note: \_\_\_\_\_

Type: \_\_\_\_\_

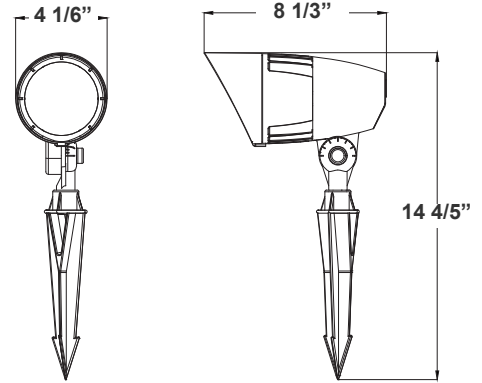

14 4/5"(H) x 4 1/6"(W) x 8 1/3"(D)

## Features

- Die-cast Aluminum Housing with Powder Coat Finish (Dark Bronze)
- 1/2" Threaded Knuckle Stem
- 7-Year Warranty
- Lens Type: Plaid Tempered Glass + Aluminum Reflectors

## Technical Specifications

### Mechanical:

- This Fixture is Bluetooth mesh Enabled. Bluetooth mesh networking enables many-to-many (m:m) device communications and is optimized for creating large-scale device networks. It is ideally suited for control monitoring and automation solutions that require tens, hundreds or thousands of devices to communicate with one another
- Die-cast Aluminum Housing with Powder Coat Finish (Dark Bronze)
- Solid State Lighting Technology for Long Life, No Maintenance Needed and High-Efficiency
- High Conductive Aluminum LED Board
- 8-1/2" PC Spike Included
- 1/2" Threaded Knuckle Stem
- IP Rating: IP65
- Operating Temperature: -40°F to 104°F
- Suitable for Wet Locations
- Rotatable Shroud with Set Screw
- 7-Year Warranty

### Electrical:

- Voltage: 12V AC/DC
- Power Factor: >0.9
- Wattage: 15W
- Input current: 1A Max
- Efficacy: 48LPW
- Bluetooth Connection Range: Approximately 30 feet (10 meters). Maximum Communication Range Will Vary Depending On Obstacles (Person, Metal, Wall, etc.) Or Electromagnetic Environment.

### Lighting:


- Dimmable: Non Dimmable
- Total lumens: 720LM
- Color Temperatures: RGBW Seletable Trough Phone App
- Color Rendering Index: CRI ≥ 80
- Beam Angle: 60°
- Lifespan: 70,000 Hrs.

### Applications:


- The fixture has classic traditional appearance, professional light distribution design, 90-degree beam angle, ideal for park landscaping, garden, architectural landscape lighting, suitable for wet locations



## Photometrics: FLVX-MD-15W-RGBW-BT-BR

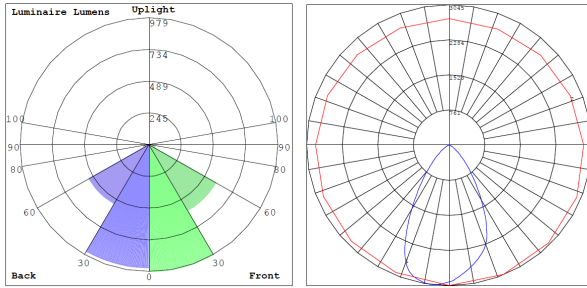

BUG Rating: B2-U0-G0

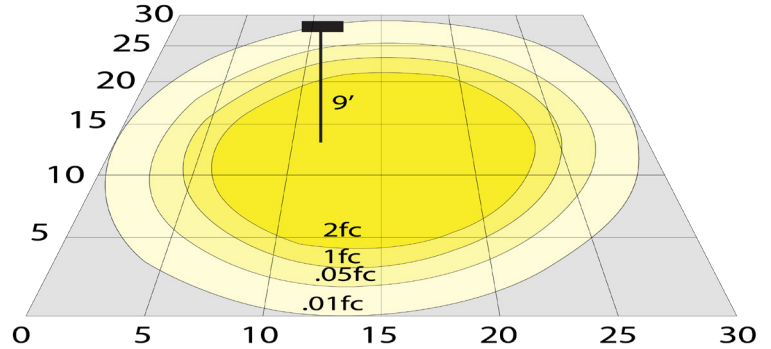

24W 3000K, Area 30'x 30' Mounting Height: 9'

## Other Views:



Side View



Front View



Back View

## Performance Table: FLVX-MD-15W-RGBW-BT-BR

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
FLVX-MD-15W-RGBW-BT-BR	15W	12V	720LM	RGBW	B2-U0-G0	48

## Sample Ordering

Model	Size	Watt	Color Temp	Bluetooth	Finish
FLVX	MD	15W	RGBW	BT	BR

## Accessories:

- Blank = No Option For Accessories
- A-41-BR = 1/2" NPT Hub, Cast Aluminum, Bronze Powder Coat Finish
- LSWN1 = Bag of 24, Waterproof Wire Connectors, For Up to Two 14-2 + One 16-2 Cables
- LSWN2 = Box of 24, Waterproof Wire Connectors, For Up to Three 12-2 Cables
- LSWN2-100 = Jar of 100, Waterproof Wire Connectors, For Up to Three 12-2 Cables
- A-41-S = Tree Mounting Base
- LG-SMB-BZ = 12V Brass Landscape Tree or Surface Bracket, Antique Bronze Finish
- BC-13 = 13" Bungee Cords with Hooks
- BC-18 = 18" Bungee Cords with Hooks
- BC-24 = 24" Bungee Cords with Hooks
- BC-32 = 32" Bungee Cords with Hooks
- FLDVX-FS-MD-BR = X-GEN BULLET REPLACEMENT FLAT SHROUD FOR MD SIZE HOUSING, BLACK
- FLDVX-MD-RL35 = X-GEN BULLET REPLACEMENT 35-DEGREE REPL. LENS FOR MD SIZE HOUSING

## ACCESSORIES:



**A-41-BR**  
1/2" NPT Hub, Cast aluminum, Bronze Powder coat finish



**LSWN1**  
Bag of 24, Waterproof wire connectors, for up to two 14-2 + one 16-2 cables



**LSWN2**  
Box of 24, Waterproof wire connectors, for up to three 12-2 cables



**LSWN2-100**  
Jar of 100, Waterproof wire connectors, for up to three 12-2 cables



**A-41-S**  
Tree mounting base




**LG-SMB-BZ**  
12V brass landscape tree or surface bracket, antique bronze finish



**BC-13/18/24/32**  
13"/18"/24"/32" Bungee cords with hooks



**FLDVX-FS-MD-BR**  
X-GEN BULLET REPLACEMENT FLAT SHROUD FOR MD SIZE HOUSING, BRONZE



- For Setting Up The Light(s), Initial Internet Connection or Mobile Data Is Required.
- After the Initial Setup, Internet Connection is not Necessary Anymore. The lights Can Be Controlled with The Mobile App on The Phone or Tablet. Features Such as Dimming, Changing Colors, Lights Scenes, etc.
- Scheduling Feature Requires Internet Connection.
- Bluetooth Devices Need a Gateway (Sold Separately) In Order to Connect to WiFi Network (Internet)

