

# FLVX SERIES

OUTDOOR LIGHTING

**WESTGATE**  
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

FLVX-MD-24W-30K-BR  
FLVX-MD-24W-40K-BR



Selection:




Customer Name: \_\_\_\_\_

Project Name: \_\_\_\_\_

Note: \_\_\_\_\_

Type: \_\_\_\_\_

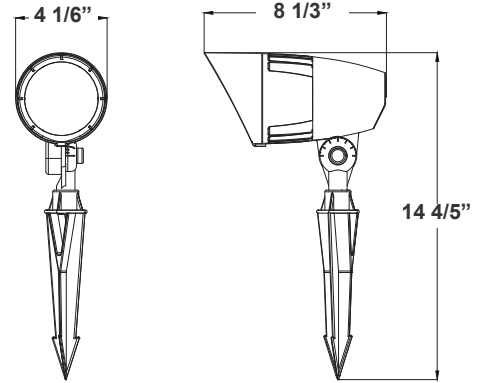

14 4/5"(H) x 4 1/6"(W) x 8 1/3"(D)

The fixture has classic traditional appearance, professional light distribution design, 90-degree beam angle, ideal for park landscaping, garden, architectural landscape lighting, suitable for wet locations

## Features

- Die-cast Aluminum Housing with Powder Coat Finish (Dark Bronze)
- 1/2" Threaded Knuckle Stem
- 7-Year Warranty
- Lens Type: Plaid Tempered Glass + Aluminum Reflectors

## Technical Specifications

### Electrical:

- Voltage: 12V AC/DC
- Power Factor: >0.9
- Wattage: 24W
- Input current: 1A Max
- Efficacy: 120LPW

### Mechanical:

- Die-cast Aluminum Housing with Powder Coat Finish (Dark Bronze)
- Solid State Lighting Technology for Long Life, No Maintenance Needed and High-Efficiency
- High Conductive Aluminum LED Board
- 8-1/2" PC Spike Included
- 1/2" Threaded Knuckle Stem
- IP Rating: IP65
- Operating Temperature: -40°F to 104°F
- Suitable for Wet Locations
- Rotatable Shroud with Set Screw
- 7-Year Warranty

### Lighting:

- Dimmable: Non Dimmable
- Total lumens: 2900LM
- Color Temperatures: 3000K/4000K
- Color Rendering Index: CRI ≥ 80
- Beam Angle: 60°
- Lifespan: 70,000 Hrs.

### Applications:

- The fixture has classic traditional appearance, professional light distribution design, 90-degree beam angle, ideal for park landscaping, garden, architectural landscape lighting, suitable for wet locations

### Other Models:

- 24W | 2900LM | FLVX-MD-24W-30K-BR
- 24W | 2900LM | FLVX-MD-24W-40K-BR




Phone: (877) 805-2252 | Fax: (877) 805-2252  
www.westgatemfg.com




WG-07/072022

## Photometrics: FLVX-MD-24W-BR

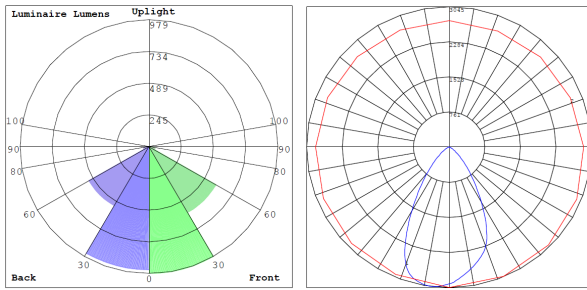

BUG Rating: B2-U0-G0

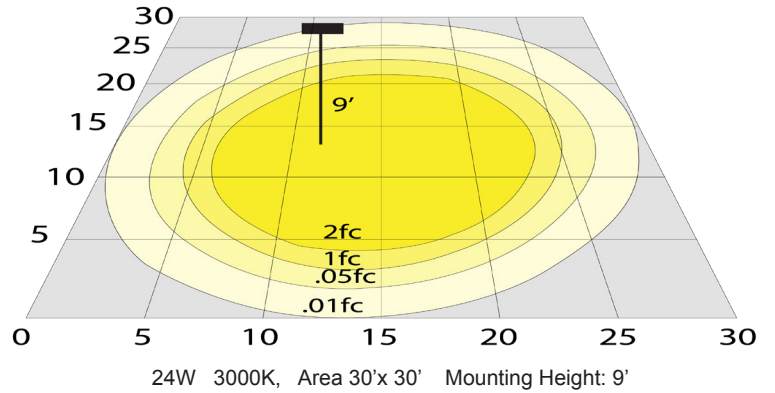

24W 3000K, Area 30'x 30' Mounting Height: 9'

## Other Views:



Side View



Front View



Back View

## Performance Table: FLVX-MD-24W-BR

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
FLVX-MD-24W-30K-BR	24W	12V	2900LM	3000K	B2-U0-G0	120
FLVX-MD-24W-40K-BR				4000K		

## Sample Ordering

Model	Size	Watt	Color Temp.	Finish
FLVX	- MD	- 24W	- <input type="text"/>	- BR
			30K = 3000K 40K = 4000K	

## Accessories:

Blank = No Option For Accessories

A-41-BR = 1/2" NPT Hub, Cast Aluminum, Bronze Powder Coat Finish

LSWN1 = Bag of 24, Waterproof Wire Connectors, For Up to Two 14-2 + One 16-2 Cables

LSWN2 = Box of 24, Waterproof Wire Connectors, For Up to Three 12-2 Cables

LSWN2-100 = Jar of 100, Waterproof Wire Connectors, For Up to Three 12-2 Cables

A-41-S = Tree Mounting Base

LG-SMB-BZ = 12V Brass Landscape Tree or Surface Bracket, Antique Bronze Finish

BC-13 = 13" Bungee Cords with Hooks

BC-18 = 18" Bungee Cords with Hooks

BC-24 = 24" Bungee Cords with Hooks

BC-32 = 32" Bungee Cords with Hooks

FLDVX-FS-MD-BR = X-GEN BULLET REPLACEMENT FLAT SHROUD FOR MD SIZE HOUSING, BLACK

FLDVX-MD-RL35 = X-GEN BULLET REPLACEMENT 35-DEGREE REPL. LENS FOR MD SIZE HOUSING

## ACCESSORIES:



**A-41-BR**

1/2" NPT hub, Cast aluminum, Bronze Powder coat finish



**LSWN1**

Bag of 24, Waterproof wire connectors, for up to two 14-2 + one 16-2 cables



**LSWN2**

Box of 24, Waterproof wire connectors, for up to three 12-2 cables



**LSWN2-100**

Jar of 100, Waterproof wire connectors, for up to three 12-2 cables



**A-41-S**

Tree mounting base



**LG-SMB-BZ**

12V brass landscape tree or surface bracket, antique bronze finish



**BC-13/18/24/32**

13"/18"/24"/32" Bungee cords with hooks



**FLDVX-FS-MD-BR**

X-GEN BULLET REPLACEMENT FLAT SHROUD FOR MD SIZE HOUSING, BRONZE

## Example:

1. FLVX-MD-24W-30K-BR (FOR FLV12 24W 30K FIXTURE 12V)
2. FLVX-MD-24W-30K-BR (FOR FLV12 24W 30K FIXTURE 12V)  
FLDVX-FS-MD-BR (X-GEN BULLET REPLACEMENT FLAT SHROUD FOR MD SIZE HOUSING, BLACK)

