

# FMD SERIES Residential Lighting

FMD-11-MCT5-WH




The LED Flush Mount Surface Fixture is a low profile downlight intended for ceiling or wall mount applications. Driver on Board (DOB) technology, with no driver or transformer needed. These flush mount ceiling lights mount directly to a 4" deep dish junction box ideal for Residential and commercial applications.

Customer Name: \_\_\_\_\_

Project Name: \_\_\_\_\_

Note: \_\_\_\_\_

Type: \_\_\_\_\_

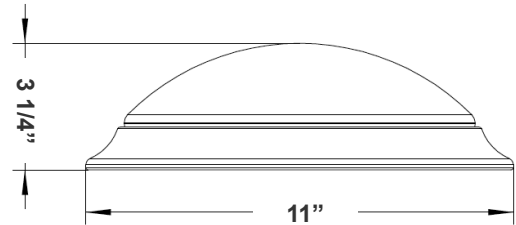

11" (W) x 3 1/4" (H)

## Features

- Construction: Spun Aluminum + Steel (White Finish)
- Optics: White Translucent Acrylic Lens
- 5-Year Warranty
- 50,000 Hours Rated Life
- MCT: Multi Color Temperature (Selectable with Switch Inside Fixture)

## Technical Specifications

### Electrical:

- Voltage: 120 VAC 60Hz
- Wattage: 20W
- Power Factor: >0.9
- Efficacy: 75 LPW

### Mechanical:

- Optics: White Translucent Acrylic Lens
- Construction: Spun aluminum Steel (White Finish)
- Operating Temp: -4°F to +104°F
- IP Rating: IP20, Indoor Use Only

### Lighting:

- Dimmable Down to 10% Using a Standard TRIAC LED Dimmer
- Total Lumens: 1500LM
- Color Temperatures: 2700K/3000K/3500K/4000K/5000K
- Multi-CCT (selectable with switch is on the LED Board Under the Lens)
- Color Rendering Index: CRI ≥ 80

### Applications:



- The LED Flush Mount Surface Fixture is a low profile down light intended for ceiling or wall mount applications. Driver on Board (DOB) technology, with no driver or transformer needed. These flush mount ceiling lights mount directly to a 4" deep dish junction box ideal for Residential and commercial applications

### Other Models:


- 24W | 1800LM | FMD-13-MCT5-WH



## Photometrics: FMD-11-MCT5-WH



BUG Rating: B1-U2-G1

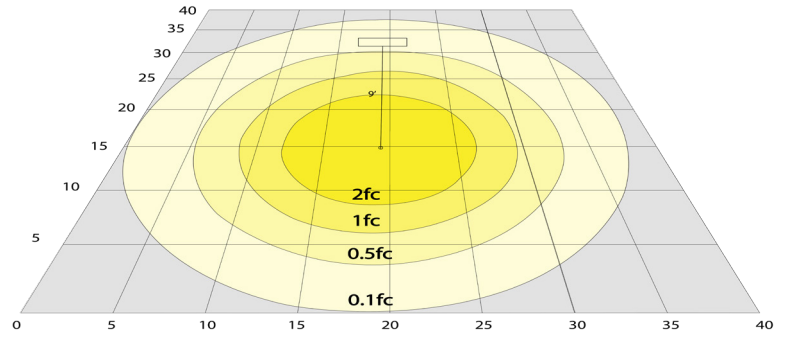


Area 40'x 40' Mounting Height: 9'

## Other Views:



Side View



Front View



Back View

## Performance Table: FMD-11-MCT5-WH

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
FMD-11-MCT5-WH	20W	120V	1500LM	2700K 3000K 3500K 4000K 5000K	B1-U2-G1	75

## Sample Ordering

**Model**   **Size**   **Color Temp.**   **Housing**

FMD - 11 - MCT5 - WH

## Factory-Installed Options:

Blank = No Option For Accessories  
 OPT-SEN-2US= ULTRASONIC BI-LEVEL DIMMING  
 WEC-3RC= OPTIONAL REMOTE CONTROL

## SENSOR AND EMERGENCY BATTERY BACKUP OPTIONS:



WEC-3RC



OPT-SEN-2US

## Example:

1. FMD-11-MCT5-WH
2. FMD-11-MCT5-WH  
OPT-SEN-2US

(FOR FMD 20W MCT5 FIXTURE 120V)

(FOR FMD 20W MCT5 FIXTURE 120V)  
(ULTRASONIC BI-LEVEL DIMMING)

