

FMHT SERIES

Residential Lighting

WESTGATE
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

FMHT-16-MCT5-WH

FMHT-16-MCT5-BK

FREE FORM FLUSH MOUNT FIXTURES - 120V

MCT Multi Color Temperature (Selectable)

Customer Name: _____

Project Name: _____

Note: _____


Type: _____



Avail Finish:



The LED Flush Mount Surface Fixture is a low profile downlight intended for ceiling or wall mount applications. Driver on Board (DOB) technology, with no driver or transformer needed. These flush mount ceiling lights mount directly to a 4" deep dish junction box ideal for Residential and commercial applications.

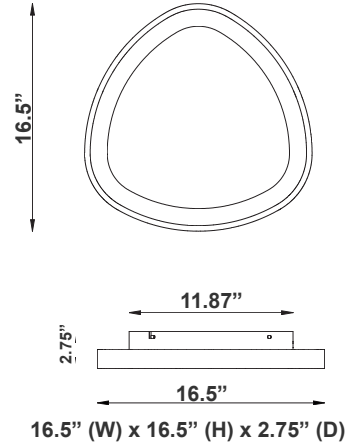

Features

- Construction: Spun Aluminum + Steel (White Finish)
- Optics: White Translucent Acrylic Lens
- 5-Year Warranty
- 50,000 Hours Rated Life
- MCT: Multi Color Temperature (Selectable with Switch Inside Fixture)

Technical Specification

Electrical:

- Voltage: 120V AC 60Hz
- Wattage: 20W
- Power Factor: >0.9
- Efficacy: 70 LP

Mechanical:

- Optics: White Translucent Acrylic Lens
- Construction: Spun aluminum Steel (White Finish)
- Operating Temp: -4°F to +104°F
- Suitable for Damp Locations When Gasket is Used
- IP Rating: IP20, Indoor Use Only

Lighting:

- Dimmable Down to 10% Using a Standard TRIAC LED Dimmer
- Total Lumens: 1400LM
- Color Temperatures: 2700K/3000K/3500K/4000K/5000K
- Multi-CCT (selectable with switch is on the LED Board Under the Lens)
- Color Rendering Index: CRI ≥ 80

Applications:

- The LED Flush Mount Surface Fixture is a low profile down light intended for ceiling or wall mount applications. Driver on Board (DOB) technology, with no driver or transformer needed. These flush mount ceiling lights mount directly to a 4" deep dish junction box ideal for Residential and commercial applications

Other Models:

- 40W | 2800LM | FMHT-24-MCT5-BK





Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatetemp.com |




WG-02272025

Photometrics: FMHT-16-MCT5



BUG Rating: B1-U3-G1

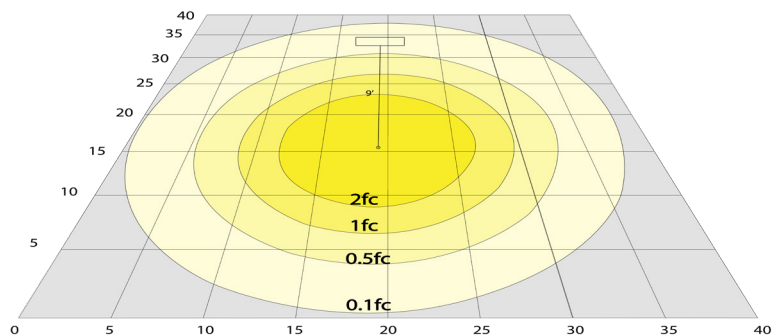

Area 40' x 40' Mounting Height: 9'

Other Views:

White:



Front View



Night View

Black:



Front View



Night View

Performance Table: FMHT-16-MCT5

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
FMHT-16-MCT5-WH FMHT-16-MCT5-BK	20W	120V	1800LM	2700K 3000K 3500K 4000K 5000K	B1-U3-G1	70

Sample Ordering

Model	Size	Color Temp.	Housing
FMHT	16	MCT5	

WH = White
BK = Black

