FMHT SERIES Residential Lighting

FMHT-20-MCT5-WH FMHT-20-MCT5-BK

FREE FORM FLUSH MOUNT FIXTURES - 120V

MUIT Multi Color Temperature (Selectable)




The LED Flush Mount Surface Fixture is a low profile downlight intended for ceiling or wall mount applications. Driver on Board (DOB) technology, with no driver or transformer needed. These flush mount ceiling lights mount directly to a 4" deep dish junction box ideal for Residential and commercial applications.






Project Name:

Note:





20.5" (W) x 20.5" (H) x 2.75" (D)

eatures

- Construction: Spun Aluminum + Steel (White Finish)
- Optics: White Translucent Acrylic Lens
- 5-Year Warranty

- 50.000 Hours Rated Life
- MCT: Multi Color Temperature (Selectable with Switch Inside Fixture)

Technical Specifications

Electrical:

Voltage: 120V AC 60Hz

Wattage: 30W Power Factor: >0.9 Efficacy: 70 LPW

Mechanical:

- Optics: White Translucent Acrylic Lens
- Construction: Spun aluminum Steel (White Finish)
- Operating Temp: -4°F to +104°F
- Suitable for Damp Locations When Gasket is Used
- IP Rating: IP20, Indoor Use Only

Lighting:

- Dimmable Down to 10% Using a Standard TRIAC LED Dimmer
- Total Lumens: 2100LM
- Color Temperatures:
 - 2700K/3000K/3500K/4000K/5000K
- Multi-CCT (selectable with switch is on the LED Board Under the Lens)
- Color Rendering Index: CRI ≥ 80

Applications:

The LED Flush Mount Surface Fixture is a low profile down light intended for ceiling or wall mount applications. Driver on Board (DOB) technology, with no driver or transformer needed. These flush mount ceiling lights mount directly to a 4" deep dish junction box ideal for Residential and commercial applications

Other Models:

40W | 2800LM | FMHT-24-MCT5-BK











Photometrics: FMHT-20-MCT5



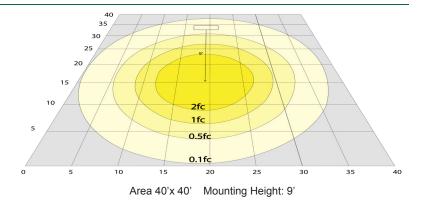

Other Views:

White:



Front View



Night View

Black:



Front View



Night View

Performance Table: FMHT-20-MCT5

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
FMHT-20-MCT5-WH FMHT-20-MCT5-BK	30W	120V	2100LM	2700K 3000K 3500K 4000K 5000K	B1-U3-G1	70

Sample Ordering

Model Size Color Temp. Housing

FMHT = 20 = MCT5 = WH = White BK= Black



