

FMLB SERIES

Residential Lighting

FMLB-R5-MCT5-REG-WH

FMLB-R5-MCT5-REG-BK

REGRESSED CEILING LIGHTS BUILT WITH FMLB FIXTURES INCLUDED, 5CCT

MCT Multi Color Temperature (Selectable)

WESTGATE




THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

Customer Name: _____

Project Name: _____

Note: _____

Type: _____

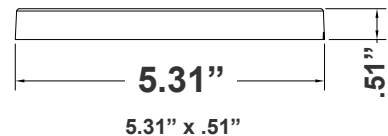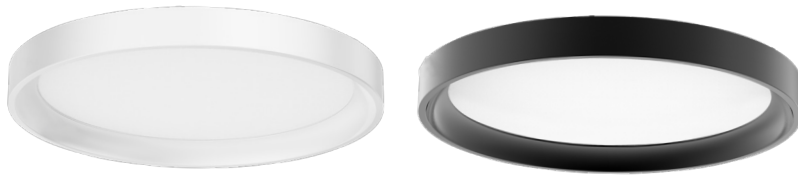

Flush Mount lighting can use in most rooms of the house, especially those where you want ambient, general light. It's especially useful for hallways, kitchens, family rooms, bathrooms, closets, and bedrooms. Also Ideal for closets, storage areas, attics, corridors, or general lighting solutions for residential and commercial applications.

Features

- Unique DOB (Driver On Board) LED Board Enclosed in Clear PC Cover for Better Performance
- Multi CCT (Selectable Switch on LED Board Under the Lens)
- Die-cast Aluminum. Powder-Coated
- 5-Year Warranty
- 1" Deep

Technical Specifications

Electrical:

- Voltage: 120V AC
- Power Factor: >0.90
- Wattage: 8W
- Efficacy: 70 LPW

Mechanical:

- White and Black Finish
- Stainless Steel Test Button with Integrated Indicator Light
- Die-cast Aluminum. Powder-Coated
- Maximum Ambient Temperature: 32°F to 104°F
- 5-Year Warranty
- Wet Location

Lighting:

- Multi CCT (Selectable Switch on Driver)
- Dimming: TRIAC Dimming (Using Standard TRIAC LED Dimmers)
- Total Lumens: 560LM
- Color Temperatures: 2700/3000/3500/4000/5000K
- Color Rendering Index: CRI ≥ 90
- Beam angle: 120°
- Rated life: 50,000 hrs

Applications:

- Flush Mount lighting can use in most rooms of the house, especially those where you want ambient, general light. It's especially useful for hallways, kitchens, family rooms, bathrooms, closets, and bedrooms. Also Ideal for closets, storage areas, attics, corridors, or general lighting solutions for residential and commercial applications





Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com




WG-07182022

Photometrics: FMLB-R5-MCT5-REG

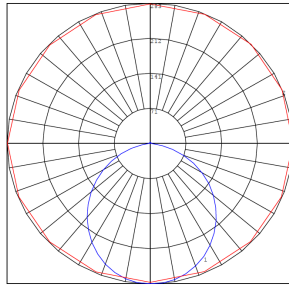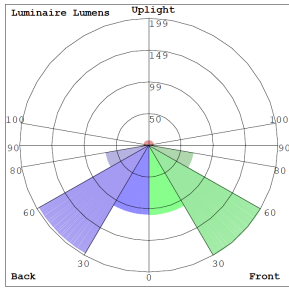

BUG Rating: B0-U1-G0

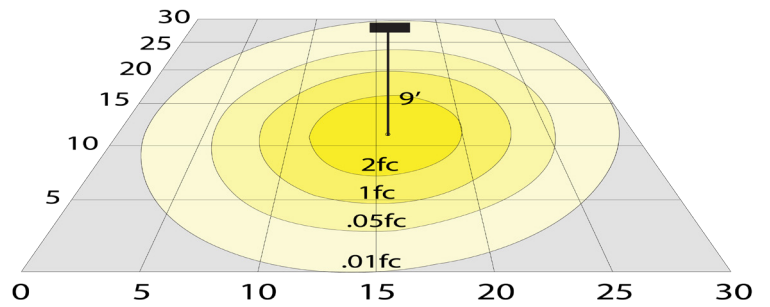

Simulation Based on 4000K Area 30'x 30' Mounting Height: 9'



White



Black

Performance Table: FMLB-R5-MCT5-REG

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
FMLB-R5-MCT5-REG-WH FMLB-R5-MCT5-REG-BK	8W	120V	560LM	2700K 3000K 3500K 4000K 5000K	B0-U1-G0	70

Sample Ordering


Model		Size		Color Temp.		Regressed		Finishes
FMLB	-	R5	-	MCT5	-	REG	-	
WH= White BK = Black								

Accessory Options


FMLB-CS-10FT-WH = FMLB 10FT Suspension Cord And Canopy Accessory - White
 FMLB-CS-10FT-BK = FMLB 10FT Suspension Cord And Canopy Accessory - Black
 FMLB-CSC-10FT-WH FMLB = Canopy And Cord Pendant Cylinder Accessory 10FT White
 FMLB-CSC-10FT-BK FMLB = Canopy And Cord Pendant Cylinder Accessory 10FT Black
 FMLB-SRK-412-3W-WH FMLB = Downrod Kit Pendant Cylinder Accessory 4X1FT 3-Wire White
 FMLB-SRK-412-3W-BK FMLB = Downrod Kit Pendant Cylinder Accessory 4X1FT 3-Wire Black



Accessories: FMLB-R5-MCT5-REG

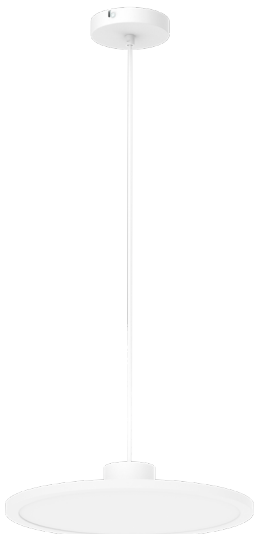

FMLB-CS-10FT-WH

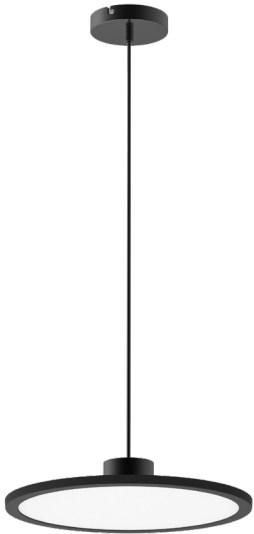

FMLB-CS-10FT-BK



FMLB-CSC-10FT-WH FMLB



FMLB-CSC-10FT-BK FMLB



FMLB-SRK-412-3W-WH FMLB



FMLB-SRK-412-3W-BK FMLB

