

FMLB SERIES Residential Lighting



FMLB-R9-MCT5
BUILDER SERIES FLUSH MOUNT FIXTURES
MCT Multi Color Temperature (Selectable)

WESTGATE
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

Customer Name: _____

Project Name: _____

Note: _____ | Type: _____

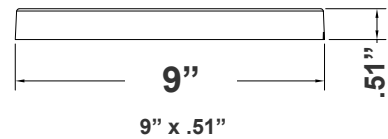

Flush Mount lighting can use in most rooms of the house, especially those where you want ambient, general light. It's especially useful for hallways, kitchens, family rooms, bathrooms, closets, and bedrooms. Also Ideal for closets, storage areas, attics, corridors, or general lighting solutions for residential and commercial applications.

Features

- Unique DOB (Driver On Board) LED Board Enclosed in Clear PC Cover for Better Performance
- Multi CCT (Selectable Switch on LED Board Under the Lens)
- Die-cast Aluminum. Powder-Coated
- 5-Year Warranty
- 1" Deep

Technical Specifications

Electrical:

- Voltage: 120V AC
- Power Factor: >0.90
- Wattage: 18W
- Efficacy: 80LPW

Mechanical:

- White Finish
- Stainless Steel Test Button with Integrated Indicator Light
- Die-cast Aluminum. Powder-Coated
- Maximum Ambient Temperature: 32°F to 104°F
- 5-Year Warranty
- Wet Location

Lighting:

- Multi CCT (Selectable Switch on Driver)
- Dimming: TRIAC Dimming (Using Standard TRIAC LED Dimmers)
- Total Lumens: 1440LM
- Color Temperatures: 2700/3000/3500/4000/5000K
- Color Rendering Index: CRI ≥ 90
- Beam angle: 120°
- Rated life: 50,000 hrs

Applications:



- Flush Mount lighting can use in most rooms of the house, especially those where you want ambient, general light. It's especially useful for hallways, kitchens, family rooms, bathrooms, closets, and bedrooms. Also Ideal for closets, storage areas, attics, corridors, or general lighting solutions for residential and commercial applications




Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com



Photometrics: FMLB-R9-MCT5

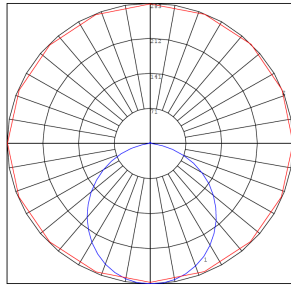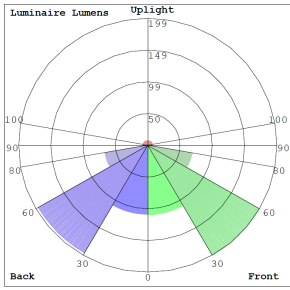

BUG Rating: B0-U1-G0

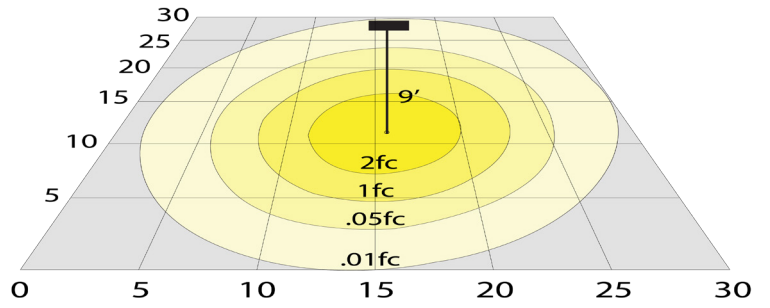


Simulation Based on 4000K Area 30'x 30' Mounting Height: 9'

Other Views:



Side View

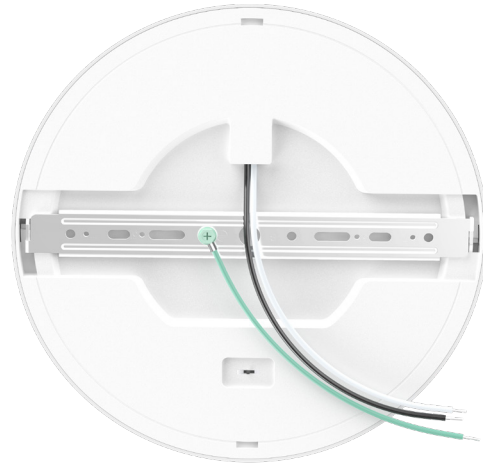

Back View

Performance Table: FMLB-R9-MCT5

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
FMLB-R9-MCT5	9W	120V	14400LM	2700K 3000K 3500K 4000K 5000K	B0-U1-G0	80

Sample Ordering

Model Size Color Temp.
FMLB - R9 - MCT5

Accessory Options

- FMLB-R9-TRM-BN = FMLB-R9 Color Trim - Brushed Nickel
- FMLB-R9-TRM-BK = FMLB-R9 Color Trim - Black
- FMLB-R9-TRM-ALAB-BK = FMLB-R9 Real Alabaster Lens With Trim - Black
- FMLB-R9-TRM-ALAB-GD = FMLB-R9 Real Alabaster Lens With Trim - Gold
- FMLB-R9-TRM-ALAB-BN = FMLB-R9 Real Alabaster Lens With Trim - Brushed Nickel

ACCESSORIES



FMLB-R9-TRM-BN



FMLB-R9-TRM-BK



FMLB-R9-TRM-ALAB-BK



FMLB-R9-TRM-ALAB-GD



FMLB-R9-TRM-ALAB-BN

