# FMLB SERIES Residential Lighting


FMLB-R9-MCT5-FMF12-WG FMLB-R9-MCT5-FMF12-BG

CEILING LIGHTS BUILT WITH FMLB FIXTURES INCLUDED, 5CCT Multi Color Temperature (Selectable)




**Customer Name:** Project Name: Note: Type:





Flush Mount lighting can use in most rooms of the house, especially those where you want ambient, general light. It's especially useful for hallways, kitchens, family rooms, bathrooms, closets, and bedrooms. Also Ideal for closets, storage areas, attics, corridors, or general lighting solutions for residential and commercial applications.



## eatures

- Unique DOB (Driver On Board) LED Board Enclosed in Clear PC Cover for Better Performance
- Multi CCT (Selectable Switch on LED Board Under the Lens)
- Die-cast Aluminum. Powder-Coated
- 5-Year Warranty
- 1" Deep

## **Technical Specifications**

#### **Electrical:**

Voltage: 120V AC Power Factor: >0.90 Wattage: 18W Efficacy: 80LPW

#### Mechanical:

- White/Gold and Black/Gold Finish
- Stainless Steel Test Button with Integrated Indicator
- Die-cast Aluminum. Powder-Coated
- Maximum Ambient Temperature: 32°F to 104°F
- 5-Year Warranty
- Wet Location

### Lighting:

- Multi CCT (Selectable Switch on Driver)
- Dimming: TRIAC Dimming (Using Standard TRIAC LED Dimmers)
- Total Lumens: 1440LM
- Color Temperatures: 2700/3000/3500/4000/5000K
- Color Rendering Index: CRI ≥ 90
- Beam angle: 120° Rated life: 50,000 hrs

#### **Applications:**

Flush Mount lighting can use in most rooms of the house, especially those where you want ambient, general light. It's especially useful for hallways, kitchens, family rooms, bathrooms, closets, and bedrooms. Also Ideal for closets, storage areas, attics, corridors, or general lighting solutions for residential and commercial applications












#### Photometrics: FMLB-R9-MCT5-FMF12





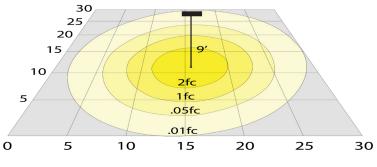

BUG Rating: B0-U1-G0

Simulation Based on 4000K Area 30'x 30' Mounting Height: 9'

#### **Other Views:**





Black/Gold

White/Gold

#### Performance Table: FMLB-R9-MCT5-FMF12

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
FMLB-R9-MCT5-FMF12-WG FMLB-R9-MCT5-FMF12-BG	18W	120V	1440LM	2700K 3000K 3500K 4000K 5000K	B0-U1-G0	80

# Sample Ordering

Model	Size	Color Temp.	Size	Finishes	
FMLB -	R9	<b>–</b> MCT5 <b>–</b>	FMF12	-	
				BG = BLACK/GOLD WG = WHITE/GOLD	

## **Accessory Options**

FMLB-CS-10FT-WH = FMLB 10FT Suspension Cord And Canopy Accessory - Whie FMLB-CS-10FT-BK = FMLB 10FT Suspension Cord And Canopy Accessory - Black FMLB-CSC-10FT-WH FMLB = Canopy And Cord Pendant Cylinder Accessory 10FT White FMLB-CSC-10FT-BK FMLB = Canopy And Cord Pendant Cylinder Accessory 10FT Black FMLB-SRK-412-3W-WH FMLB = Downrod Kit Pendant Cylinder Accessory 4X1FT 3-Wire White FMLB-SRK-412-3W-BK FMLB = Downrod Kit Pendant Cylinder Accessory 4X1FT 3-Wire Black





#### Accessories: FMLB-R9-MCT5-FMF12





