


FSL SERIES Residential Lighting

FSL-11-MCT5-GD
LED 5CCT SINGLE RING FLUSH MOUNT
MCT5 Multi Color Temperature (Selectable)



Customer Name: _____
Project Name: _____
Note: _____ | Type: _____

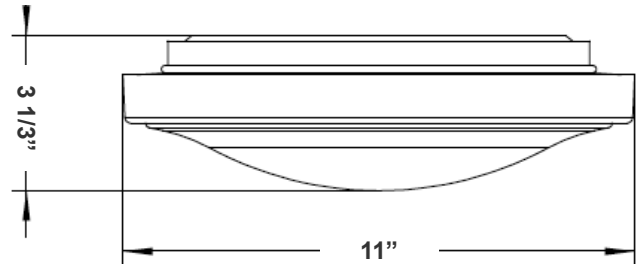

11" (W) x 3 1/3" (H)

The LED Flush Mount Surface Fixture is a low profile downlight intended for ceiling or wall mount applications. Driver on Board (DOB) technology, with no driver or transformer needed. These flush mount ceiling lights mount directly to a 4" deep dish junction box ideal for Residential and commercial applications.

Features

- Construction: Spun Aluminum + Steel (Brushed Nickel Finish)
- Optics: White Translucent Acrylic Lens
- 5-Year Warranty
- 50,000 Hours Rated Life
- MCT: Multi Color Temperature (Selectable with Switch Inside Fixture)
- High Lumens

Technical Specifications

Electrical:

- Voltage: 120 VAC 60Hz
- Wattage: 16W
- Power Factor: >0.9
- Efficacy: 75 LPW

Mechanical:

- Optics: White Translucent Acrylic Lens
- Construction: Spun aluminum Steel (Gold Finish)
- Gasket: Closed Cell Neoprene Foam Gasket
- Operating Temp: -4°F to +104°F
- Suitable for Damp Locations When Gasket is Used

Lighting:

- Dimmable Down to 10% Using a Standard TRIAC LED Dimmer
- Total Lumens: 1200LM
- Color Temperatures: 2700K/3000K/3500K/4000K/5000K
- Multi-CCT (selectable with switch is on the LED Board Under the Lens)
- Color Rendering Index: CRI ≥ 80
- IP Rating: IP20

Applications:



- The LED Flush Mount Surface Fixture is a low profile down light intended for ceiling or wall mount applications. Driver on Board (DOB) technology, with no driver or transformer needed. These flush mount ceiling lights mount directly to a 4" deep dish junction box ideal for Residential and commercial applications

Other Models:


- 20W | 1500LM | FSL-13-MCT5-GD
- 24W | 1800LM | FSL-15-MCT5-GD



Photometrics: FSL-11-MCT5-GD



BUG Rating: B1-U2-G1

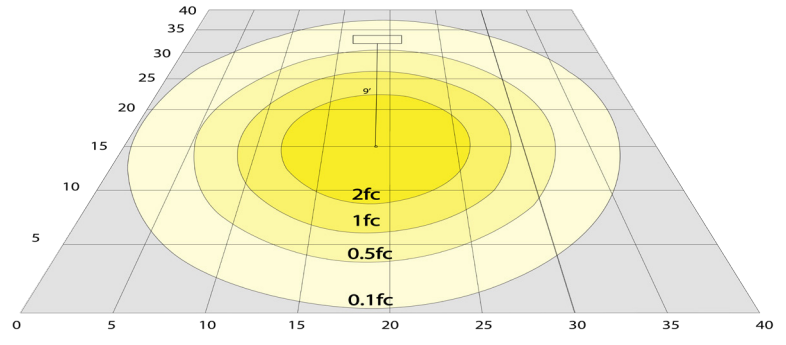


Area 40'x 40' Mounting Height: 9'

Other Views:



Side View



Front View



Back View

Performance Table: FSL-11-MCT5-GD

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
FSL-11-MCT5-GD	16W	120V	1200LM	2700K 3000K 3500K 4000K 5000K	B1-U2-G1	75

Sample Ordering

Model Size Color Temp. Finish

FSL - 11 - MCT5 - GD

Factory-Installed Options:

Blank = No Option For Accessories
 OPT-EM-FSL-11 = MOUNT IN EXTENDED BASE
 OPT-PC-FM = BUTTON WITH ALKILIARY BASE
 OPT-277V-FSL-11 = EXTERNAL BOX
 OPT-SEN-2US (INTERNAL FOR ALL MODELS) = BI-LEVEL DIMMING (REMOTE NOT NEEDED)
 WEC-3RC = REMOTE CONTROL

SENSOR AND EMERGENCY BATTERY BACKUP OPTIONS:



OPT-EM-FSL-11



OPT-SEN-2US



WEC-3RC

