

FSL SERIES

Residential Lighting

WESTGATE
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

FSL-13-MCT5-GD
LED 5CCT SINGLE RING FLUSH MOUNT
MCT5 Multi Color Temperature (Selectable)




Customer Name: _____

Project Name: _____

Note: _____

Type: _____

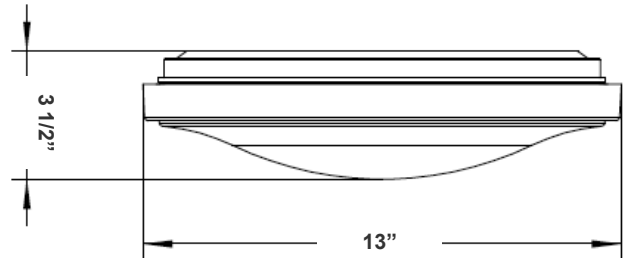

13" (W) x 3 1/2" (H)

The LED Flush Mount Surface Fixture is a low profile downlight intended for ceiling or wall mount applications. Driver on Board (DOB) technology, with no driver or transformer needed. These flush mount ceiling lights mount directly to a 4" deep dish junction box ideal for Residential and commercial applications.

Features

- Construction: Spun Aluminum + Steel (Brushed Nickel Finish)
- Optics: White Translucent Acrylic Lens
- 5-Year Warranty
- 50,000 Hours Rated Life
- MCT: Multi Color Temperature (Selectable with Switch Inside Fixture)
- High Lumens

Technical Specifications

Electrical:

- Voltage: 120 VAC 60Hz
- Wattage: 20W
- Power Factor: >0.9
- Efficacy: 75 LPW

Mechanical:

- Optics: White Translucent Acrylic Lens
- Construction: Spun aluminum Steel (Gold Finish)
- Gasket: Closed Cell Neoprene Foam Gasket
- Operating Temp: -4°F to +104°F
- Suitable for Damp Locations When Gasket is Used

Lighting:

- Dimmable Down to 10% Using a Standard TRIAC LED Dimmer
- Total Lumens: 1500LM
- Color Temperatures: 2700K/3000K/3500K/4000K/5000K
- Multi-CCT (selectable with switch is on the LED Board Under the Lens)
- Color Rendering Index: CRI ≥ 80
- IP Rating: IP20

Applications:

- The LED Flush Mount Surface Fixture is a low profile down light intended for ceiling or wall mount applications. Driver on Board (DOB) technology, with no driver or transformer needed. These flush mount ceiling lights mount directly to a 4" deep dish junction box ideal for Residential and commercial applications

Other Models:

- 16W | 1200LM | FSL-11-MCT5-GD • 24W | 1800LM | FSL-15-MCT5-GD





Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com | www.westgatecontrols.co




WG-ZA-Y9-2Z

Photometrics: FSL-13-MCT5-GD



BUG Rating: B1-U2-G1

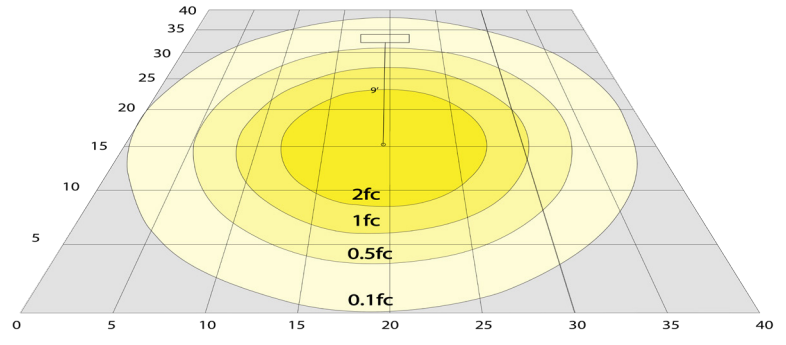

Area 40'x 40' Mounting Height: 9'

Other Views:



Side View



Front View



Back View

Performance Table: FSL-13-MCT-GD

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
FSL-13-MCT5-GD	20W	120V	1500LM	2700K 3000K 3500K 4000K 5000K	B1-U2-G1	75

Sample Ordering

Model Size Color Temp. Finish

FSL - 13 - MCT5 - GD

Factory-Installed Options:

Blank = No Option For Accessories

OPT-EM-FSL-13 = MOUNT IN EXTENDED BASE

OPT-PC-FM = BUTTON WITH ALKILIARY BASE

OPT-277V-FSL-11 = EXTERNAL BOX

OPT-SEN-2US (INTERNAL FOR ALL MODELS) = BI-LEVEL DIMMING (REMOTE NOT NEEDED)

WEC-3RC = REMOTE CONTROL

SENSOR AND EMERGENCY BATTERY BACKUP OPTIONS:



OPT-EM-FSL-13



OPT-SEN-2US



WEC-3RC

