

GL SERIES OUTDOOR LIGHTING

GL-12W-30K-BR
GL-12W-40K-BR
GL-12W-50K-BR

Customer Name: _____


Project Name: _____

Note: _____

Type: _____



Selection:

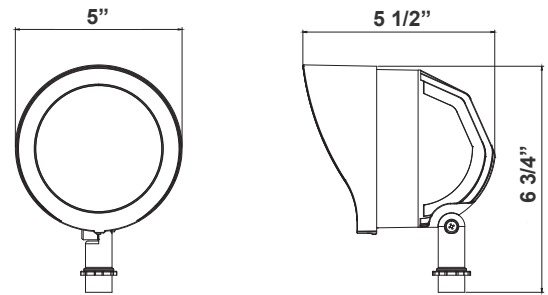

6 3/4"(H) x 5"(W) x 5 1/2"(D)

The fixture has classic traditional appearance, professional light distribution design, 90-degree beam angle, ideal for park landscaping, garden, architectural landscape lighting, suitable for wet locations

Features

- Die-cast Aluminum Housing with Powder Coat Finish (Dark Bronze)
- 1/2" Threaded Knuckle Stem
- 7-Year Warranty
- Lens Type: Plaid Tempered Glass + Aluminum Reflectors

Technical Specifications

Electrical:

- Voltage: 120-277V
- Power Factor: >0.92
- Wattage: 12W
- Efficacy: 80 LPW
- Operating Voltage: Max 900 mA, Max 36VDC

Mechanical:

- Die-cast Aluminum Housing with Powder Coat Finish (Dark Bronze)
- Solid State Lighting Technology for Long Life, No Maintenance Needed and High-Efficiency
- High Conductive Aluminum LED Board
- 1/2" Threaded Knuckle Stem
- IP Rating: IP65
- Operating Temperature: -4°F to 104°F
- Suitable for Wet Locations
- Rotatable Shroud with Set Screw
- 7-Year Warranty

Other Models:

- 24W | 1920LM | GL-24W-30K-BR
- 24W | 1920LM | GL-24W-40K-BR
- 24W | 1920LM | GL-24W-50K-BR

Lighting:



- Lens Type: Plaid Tempered Glass + Aluminum Reflectors
- Total Lumens: 960 LM
- Color Temperatures: 3000K/4000K/5000K
- Color Rendering Index: CRI ≥ 80
- Beam Angle: 90°

Applications:


- The fixture has classic traditional appearance, professional light distribution design, 90-degree beam angle, ideal for park landscaping, garden, architectural landscape lighting, suitable for wet locations



Photometrics: GL-12W

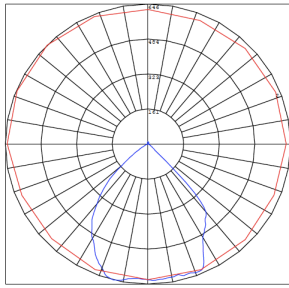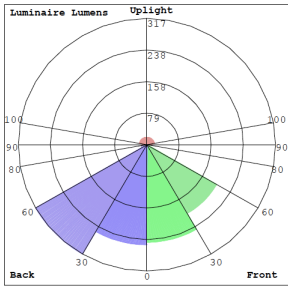

BUG Rating: B1-U2-G0

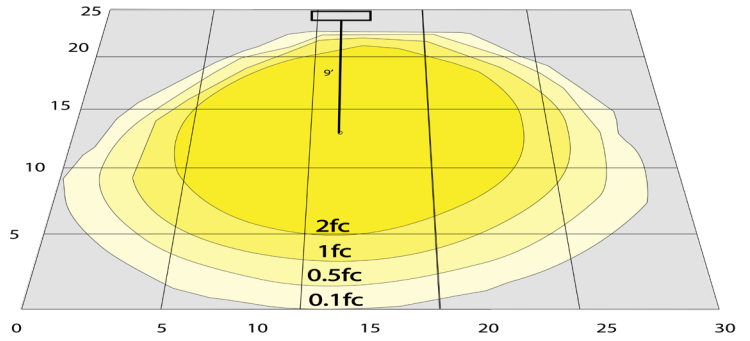

Area 25'x 30' Mounting Height: 9'

Other Views:



Side View



Front View



Back View

Performance Table: GL-12W

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
GL-12W-30K-BR	12W	120-277V	960LM	3000K	B1-U2-G0	80
GL-12W-40K-BR	12W	120-277V	960LM	4000K	B1-U2-G0	80
GL-12W-50K-BR	12W	120-277V	960LM	5000K	B1-U2-G0	80

Sample Ordering

Model	Watt	Color Temp.	Color
GL	12W		BR
30K = 3000K 40K = 4000K 50K = 5000K			

Accessories:

Blank = No Option For Accessories
 WE167 = 18-1/2" PVC Mounting Post For In-Ground Mounting
 WRC-1 = 1/2" Weatherproof Cover for Surface/Wall Mount Installation

ACCESSORIES:



WE167
 18-1/2" PVC Mounting Post
 For In-Ground Mounting



WRC-1
 1/2" Weatherproof Cover
 for Surface/Wall Mount
 Installation

Example:

- GL-12W-30K-BR (FOR GL 12W 30K FIXTURE 120-277V)
- GL-12W-30K-BR WE167 (FOR GL 12W 30K FIXTURE 120-277V)
 (18-1/2" PVC MOUNTING POST FOR IN-GROUND MOUNTING)

