


GL-24W-30K-BR  
 GL-24W-40K-BR  
 GL-24W-50K-BR

Customer Name: \_\_\_\_\_  
 Project Name: \_\_\_\_\_  
 Note: \_\_\_\_\_ | Type: \_\_\_\_\_



Selection:

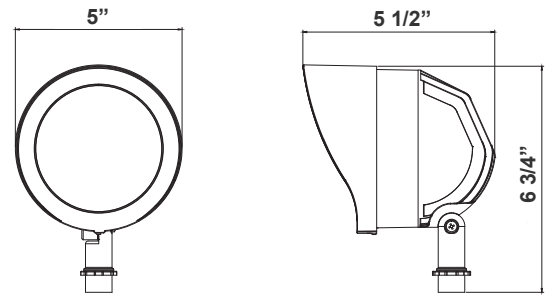

6 3/4"(H) x 5"(W) x 5 1/2"(D)

The fixture has classic traditional appearance, professional light distribution design, 90-degree beam angle, ideal for park landscaping, garden, architectural landscape lighting, suitable for wet locations

## Features

- Die-cast Aluminum Housing with Powder Coat Finish (Dark Bronze)
- 1/2" Threaded Knuckle Stem
- 7-Year Warranty
- Lens Type: Plaid Tempered Glass + Aluminum Reflectors

## Technical Specifications

### Electrical:

- Voltage: 120-277V
- Power Factor: >0.92
- Wattage: 24W
- Efficacy: 80 LPW
- Operating Voltage: Max 900 mA, Max 36VDC

### Mechanical:

- Die-cast Aluminum Housing with Powder Coat Finish (Dark Bronze)
- Solid State Lighting Technology for Long Life, No Maintenance Needed and High-Efficiency
- High Conductive Aluminum LED Board
- 1/2" Threaded Knuckle Stem
- IP Rating: IP65
- Operating Temperature: -40°F to 104°F
- Suitable for Wet Locations
- Rotatable Shroud with Set Screw
- 7-Year Warranty

### Lighting:

- Dimming: 1-10V Dimming
- Lens Type: Plaid Tempered Glass + Aluminum Reflectors
- Total Lumens: 1920 LM
- Color Temperatures: 3000K/4000K/5000K
- Color Rendering Index: CRI ≥ 80
- Beam Angle: 90°

### Applications:



- The fixture has classic traditional appearance, professional light distribution design, 90-degree beam angle, ideal for park landscaping, garden, architectural landscape lighting, suitable for wet locations

### Other Models:


- 12W | 960LM | GL-12W-30K-BR
- 12W | 960LM | GL-12W-40K-BR
- 12W | 960LM | GL-12W-50K-BR



## Photometrics: GL-24W



BUG Rating: B2-U2-G0

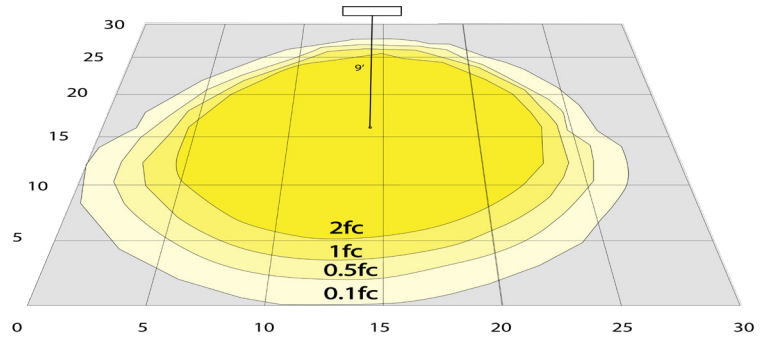

Area 30'x 30' Mounting Height: 9'


## Other Views:



Side View



Front View

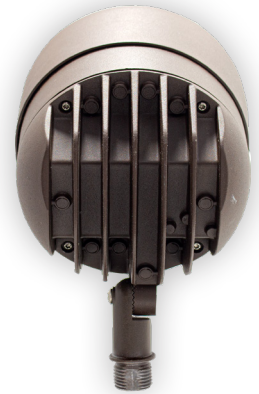

Back View

## Performance Table: GL-24W

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
GL-24W-30K-BR	24W	120-277V	1920LM	3000K	B2-U2-G0	80
GL-24W-40K-BR	24W	120-277V	1920LM	4000K	B2-U2-G0	80
GL-24W-50K-BR	24W	120-277V	1920LM	5000K	B2-U2-G0	80

## Sample Ordering

Model	Watt	Color Temp.	Color
GL	24W		BR

30K = 3000K  
40K = 4000K  
50K = 5000K

### Accessories:

Blank = No Option For Accessories  
WE167 = 18-1/2" PVC Mounting Post For In-Ground Mounting  
WRC-1 = 1/2" Weatherproof Cover for Surface/Wall Mount Installation

### ACCESSORIES:



**WE167**  
18-1/2" PVC Mounting Post  
For In-Ground Mounting



**WRC-1**  
1/2" Weatherproof Cover  
for Surface/Wall Mount  
Installation

## Example:

1. GL-24W-30K-BR (FOR GL 24W 30K FIXTURE 120-277V)
2. GL-24W-30K-BR WE167 (FOR GL 24W 30K FIXTURE 120-277V)  
(18-1/2" PVC MOUNTING POST FOR IN-GROUND MOUNTING)

