
GNB SERIES Outdoor Lighting


GNB-25W-MCT-WH-P LED GOOSENECK BARN LIGHT



Customer Name:							
Project Name:							
Note:	Type:						







10"(W) x 14 3/4"(H) x 20 1/6" (D)

The Dusk to Dawn Gooseneck Light is perfect for many generalpurpose outdoor applications. All fixtures are installed with a DC Button photocell.

Features

- Back plate: Die-cast aluminum
- Polycarbonate Lens

- 7-Year Warranty
- · Multi CCT, Switch is on bottom of Fixture

Technical Specifications

Electrical:

Voltage: 120-277V AC 60Hz

Wattage: 25WPower Factor: >0.90Efficacy: 120 LPW

• THD: <20%

Mechanical:

- Die-Cast ADC12 Aluminum Alloy, Outdoor Powder Coated
- Lens: High light Transmittance PC, Anti-UV and Fire Resistant
- DC Bottom Photocell Included
- Operating Temperature: -40°F to 104°F
- IP54, Wet Location
- 7-Year Warranty

Lighting:

• Dimming: 0-10V Dimming

Total Lumens: 3000LM

Multi CCT, Switch is on bottom of FixtureColor Temperatures: 3000K/4000K/5000K

• Color Rendering Index: CRI ≥ 70

Beam Angle: 103.5°Rated life: 70,000 Hrs

Applications:

 Farms/Barns, Storage Sheds, Entryways/Pathways, Industrial Yards, Security, Building Perimeters, Area Lighting

Other Models:

• 25W | 3000LM | GNB-25W-MCT-BR-P













Photometrics: GNB-25W-MCT-WH-P



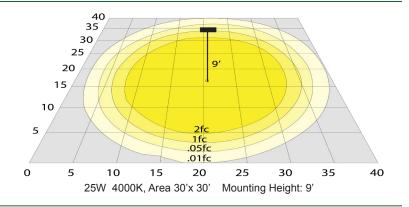

Other Views:







Lens View



Back View

Performance Table: GNB-25W-MCT-WH-P

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
GNB-25W-MCT-WH-P	25W	120-277V	3000LM	3000K/4000K/5000K	B2-U2-G1	120

Sample Ordering

Model		Wattage			Color Tem	Finish		Photocell		
	GNB	_	25W	_	MCT		WH	_	Р	

Example:

1. GNB-25W-MCT-WH-P

(FOR 25W MCT FIXTURE 120-277V)



