




GNB-40W-MCT-BR-P LED GOOSENECK BARN LIGHT




Customer Name:

Project Name:

Note: Type:





14 1/6"(W) x 15 1/4"(H) x 22 1/4" (D)

The Dusk to Dawn Gooseneck Light is perfect for many generalpurpose outdoor applications. All fixtures are installed with a DC Button photocell.

## **Features**

- Back plate: Die-cast aluminum
- Polycarbonate Lens

- 7-Year Warranty
- Multi CCT, Switch is on bottom of Fixture

# **Technical Specifications**

#### **Electrical:**

Voltage: 120-277V AC 60Hz

Wattage: 40WPower Factor: >0.90Efficacy: 120 LPW

• THD: <20%

#### Mechanical:

- Die-Cast ADC12 Aluminum Alloy, Outdoor Powder Coated
- Lens: High light Transmittance PC, Anti-UV and Fire Resistant
- DC Bottom Photocell Included
- Operating Temperature: -40°F to 104°F
- IP54, Wet Location
- 7-Year Warranty

# Lighting:

- · Multi CCT, Switch is on bottom of Fixture
- Dimming: 0-10V DimmingTotal Lumens: 4800LM
- Color Temperatures: 3000K/4000K/5000K
- Color Rendering Index: CRI ≥ 70
- Beam Angle: 103.5°Rated life: 70,000 Hrs

### **Applications:**

 Farms/Barns, Storage Sheds, Entryways/Pathways, Industrial Yards, Security, Building Perimeters, Area Lighting

#### Other Models:

• 40W | 4800LM | GNB-40W-MCT-WH-P













#### Photometrics: GNB-40W-MCT-BR-P



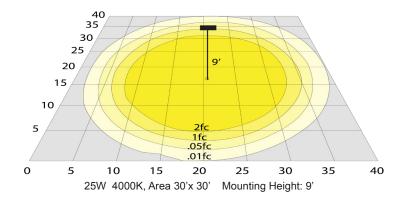

### **Other Views:**







Side View

Lens View

Back View

#### Performance Table: GNB-40W-MCT-BR-P

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
GNB-40W-MCT-BR-P	40W	120-277V	4800LM	3000K/4000K/5000K	B2-U2-G1	120

# Sample Ordering

Model		Wattage		Color Tem	Finish	Photocell		
	GNB	40W		MCT	_	BR	Р	

## **Example:**

1. GNB-40W-MCT-BR-P

(FOR 40W MCT FIXTURE 120-277V)



