

GPX SERIES Outdoor Lighting

GPX-18-60W-MCTP-BM

POST DISK LIGHT WITH BELL MOUNT POLE ADAPTER

MCTP Multi Color Temperature & Multi Power/Wattage (Selectable)

WESTGATE
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

Customer Name: _____


Project Name: _____

Note: _____

Type: _____



BELL MOUNT POLE ADAPTER
(POLE IS NOT INCL. ONLY THE ADAPTER)

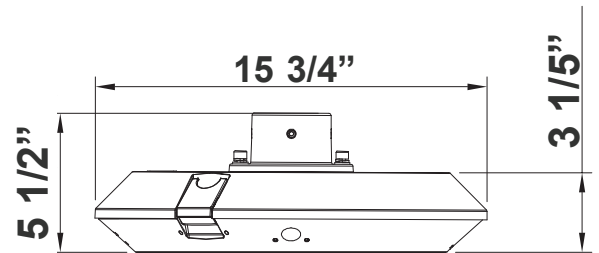

15 3/4" (W) X 5 1/2" (H)

Ideal for airports, auto dealerships, corporate offices, education, government, healthcare, industrial warehouses, municipal parking, gas stations, convenient stores, recreation and public venues, restaurants, hospitality, retail and grocery stores.

Features

- Aluminum Housing ,Outdoor Powder Coated
- 7-Year Warranty
- Multi CCT and Power: Selectable Switch Inside Of The Fixture

Technical Specifications

Electrical:

- Voltage: 100-277V AC 50/60Hz
- Wattage: 18W/30W/45W/60W
- Power Factor: 0.95
- Efficacy: 150LM/W

Mechanical:

- Aluminum Housing , Outdoor Powder Coated
- Bell Mount Pole Adapter/Bracket Goes on Up to 2" Round Poles
- Programmable Bi-Level Motion Sensor & Emergency Backup Options
- Operating Temperature: -86°F~122°F
- IP Rating: IP66, Suitable for Wet Locations
- 7-Year Warranty

Lighting:

- Multi CCT and Power: Selectable Switch Inside Of The Fixture
- Dimmable: 0~10V Dimming
- LED: SMD 3030
- Total Lumens: 9000LM Max.
- Color Temperature: 3000K/4000K/5000K
- Color Rendering index: >70
- Beam Angle: Type V (150° X 150°)
- Lifespan: 70000 Hrs.

Applications:

- Ideal For Garden, Amusement Park, Residential Quater , Industrial Park And Pedestrian street.




Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com




WG-04062022

Photometrics: GPX-18-60W-MCTP-BM

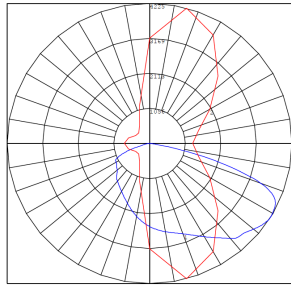


BUD Rating: B1-U1-G0

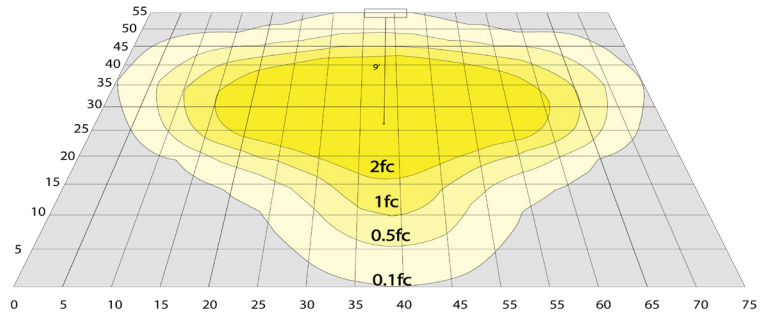

20W 5000K, Area 55'x 75' Mounting Height: 9'

Other Views:



Adapter



Lens View



Side View

Performance Table: GPX-18-60W-MCTP-BM

| MODEL NO. | Wattage | Voltage | Lumens | Color Temp. | BUG Rating | LPW |
|--------------------|--------------------------|----------|--------------------------------------|-------------------------|------------|-----|
| GPX-18-60W-MCTP-BM | 18W 30W 45W 60W | 120-277V | 2700LM 4500LM 6750LM 9000LM | 3000K 4000K 5000K | B1-U1-G0 | 150 |

Sample Ordering

Model Min. Watt Max. Watt Color Temp. Mount

GPX - 18 - 60W - MCTP - BM

Factory Installed Options:

- Blank = No Option
- OPT-EM-OD2INT = INTERNAL EMERGENCY BACK UP BATTERY
- OPT-3MPC = MICROWAVE PHOTOCELL
- OPT-CLR-95(BK/GR/SR/WH) = COLOR PAINT
- OPT-SEN-3MR-3 = BI-LEVEL MICROWAVE SENSOR
- WEC-8RC = REMOTE CONTROL
- OPT-WP-480V = 480V OPTION
- OPT-GPX-LENS-TYPE2S = FACTORY- INSTALLED TYPE 2 LENS
- OPT-GPX-LENS-TYPE3S = FACTORY- INSTALLED TYPE 3 LENS
- OPT-GPX-LENS-FL = FACTORY- INSTALLED FROSTED GLASS LENS

FACTORY INSTALLED OPTIONS:



OPT-EM-OD2INT



OPT-3MPC



OPT-SEN-3MR-3



COLOR CHART: * Choose from one of our Premium Colors with no set-up fee.

Gloss:



SILVER METALLIC
70 GLOSS
T357-GR105



SILVER METALLIC
30 GLOSS
T353-GR06



DARK RED 90
GLOSS
P009-RD02



INTERNATIONAL
ORANGE 90
GLOSS
T009-OG26



SAFETY ORANGE
90 GLOSS
T009-OG01



YELLOW 90
GLOSS
T009-YL14



YELLOW 90
GLOSS
T009-YL01



TRAFFIC GREEN
70 GLOSS
T007-GN16



GREEN 70 GLOSS
T007-GN13



GREEN 60 GLOSS
C006-GN03



BLUE 90 GLOSS
T009-BL01



DARK BLUE 80
GLOSS
T008-BL20



RAL 8028 TERRA
BROWN 90 GLOSS
C209-BR358

Hammer:




WHITE HAMMER
T013-WH09



BEIGE HAMMER
T013-BG38




GREY HAMMER
C013-GR08



SILVER
HAMMERTONE
T064-GR05




BLACK HAMMER
T013-BK62



RED HAMMER
T013-RD15



GREEN HAMMER
T013-GN220



BLUE HAMMER
T013-BL468



BRONZE HAMMER
T012-BR161

Texture:



WHITE TEXTURE
C031-WH120



FLINT GRAY
TEXTURE
T243-GR522



BLACK TEXTURE
C241-BK109



RED TEXTURE
T241-RD129



BLUE TEXTURE
C241-BL544




OIL RUBBED
BRONZE TEXTURE
T291-BR251


Vein:



BLACK/WHITE
VEIN
T075-WH34



SILVER VEIN
T375-BK26



COPPER VEIN
EXTERIOR
T075-BK211



GOLD VEIN
T375-BK10



COPPER VEIN
T375-BK07

