

# HL SERIES Indoor Lighting

## HL3R-ICAT

3In Led (TP24) Remodel Recessed Housing ICAT UL


**WESTGATE**  
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

Customer Name: \_\_\_\_\_

Project Name: \_\_\_\_\_

Note: \_\_\_\_\_

Type: \_\_\_\_\_

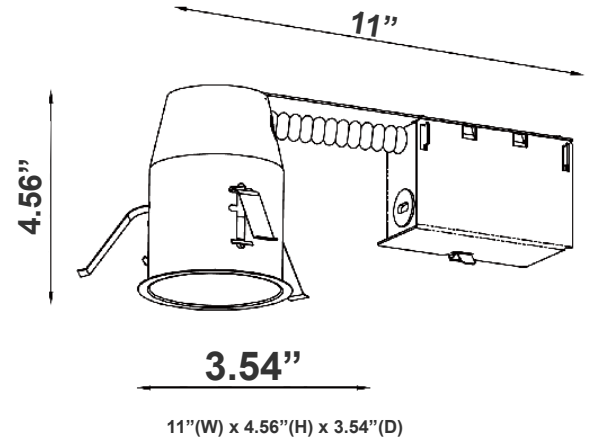

LED Recessed Housings are efficient, IC-rated fixtures designed for seamless ceiling integration. Ideal for both new construction and remodels, they offer dimming capabilities, airtight options, and excellent thermal management, making them perfect for energy-saving applications across residential and commercial spaces.

## Features

- Single-wall painted steel housing with gasket for IC-rated airtight installation in insulated ceilings
- Airtight to prevent heated airflow diffusion
- IC-rated; can be directly installed on ceiling insulation lagging
- Listed for through-branch circuit wiring
- Contains nine 8-3/5" knockouts and four Romex pry-outs with strain relief
- Ground wire provided in J-box
- Three quick connectors provided on J-Box

## Technical Specifications

### Remodel Clips:

- Four remodel clips secure the housing and accommodate 1/2" and 5/8" ceiling materials.

### Mechanical:

- Single-wall painted steel housing with gasket for IC-rated airtight installation in insulated ceilings
- Airtight to prevent heated airflow diffusion
- IC-rated; can be directly installed on ceiling insulation
- 7-Year Warranty

### Junction Box:

- Listed for through-branch circuit wiring
- Contains nine 8-3/5" knockouts and four Romex pry-outs with strain relief
- Ground wire provided in J-box
- Three quick connectors provided on J-Box

### Listings:


- UL listed for damp location.
- UL listed for Air Tight construction
- ETLus

### Applications:


- Offer efficient, low-profile lighting for commercial, retail, and residential spaces, supporting both new construction and remodels with IC-rated, airtight options for optimal energy performance and code compliance



## Other Views:

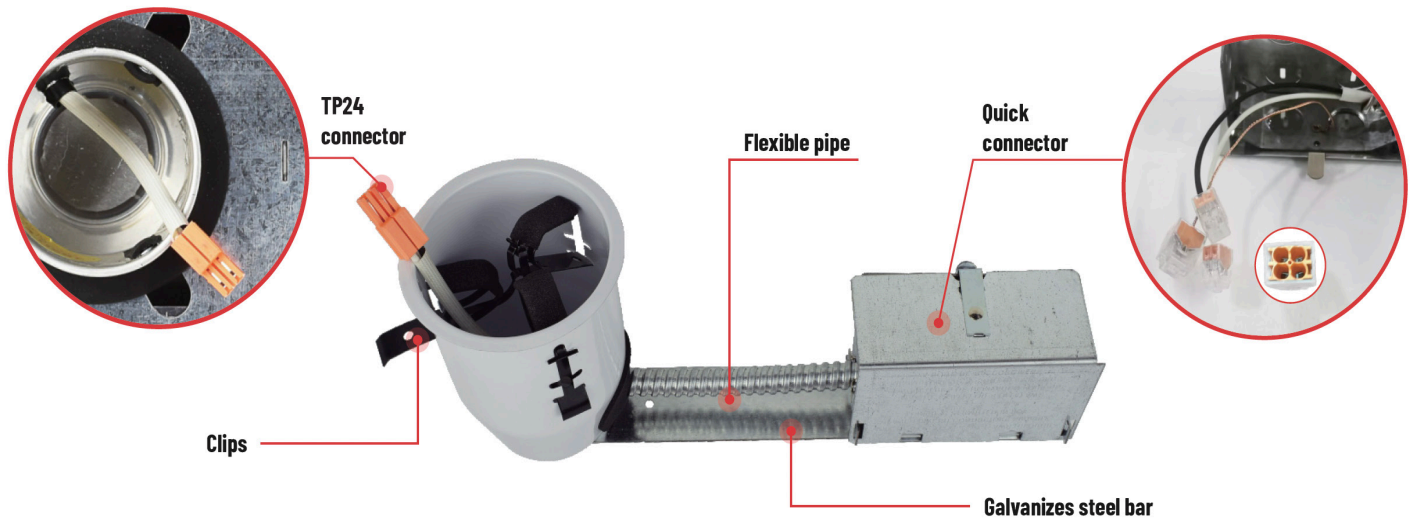


Top View

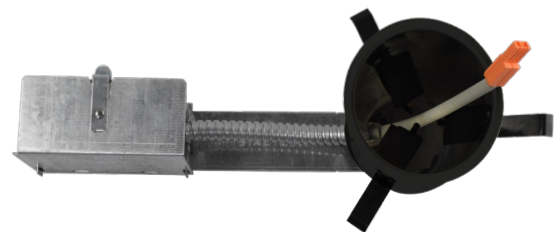

Bottom View

## Westgate Compatible Recessed Trims:

RDL3-MCT5-WP

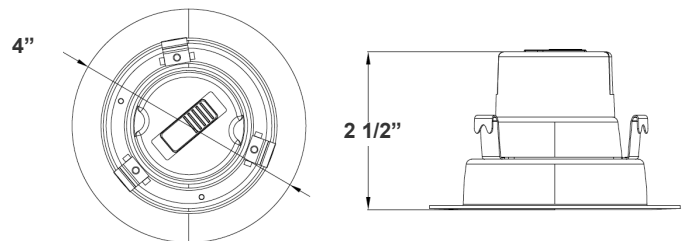

4" x 2 1/2"



MODEL NO.	Wattage	Voltage	Lumens	Color Temp.
RDL3-MCT5-WP	7W	120V	560LM	2700K/ 3000K/ 3500K/ 4000K/ 5000K



---

**Other Model:**

HL3-ICAT

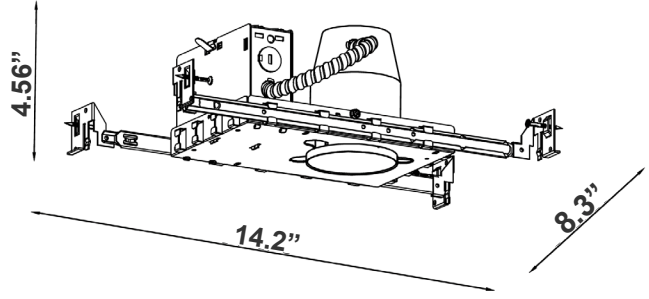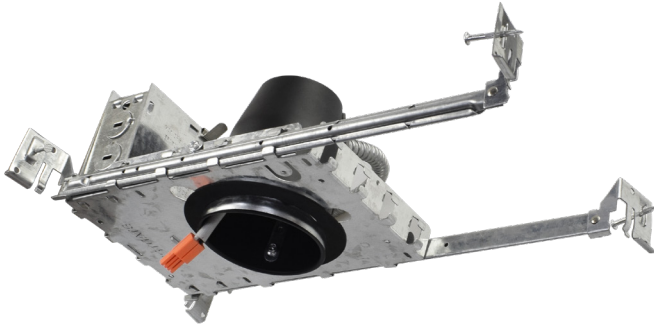

14.2"(W) x 4.56"(H) x 8.3"(D)

