

HL SERIES Indoor Lighting

HL4-ICAT

4In Led (TP24) Remodel Recessed Housing ICAT UL



WESTGATE
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

Customer Name: _____

Project Name: _____

Note: _____

Type: _____

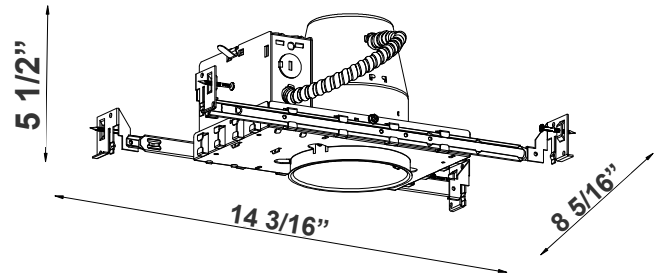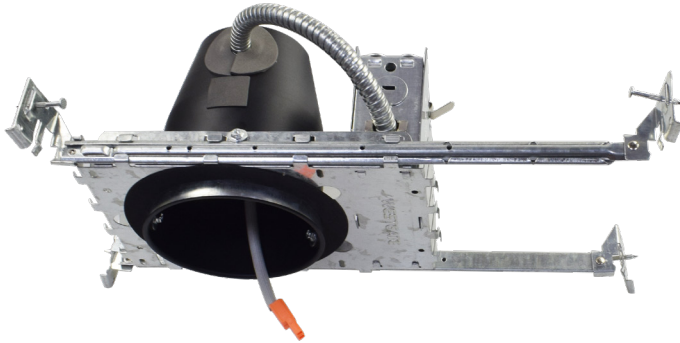

LED Recessed Housings are efficient, IC-rated fixtures designed for seamless ceiling integration. Ideal for both new construction and remodels, they offer dimming capabilities, airtight options, and excellent thermal management, making them perfect for energy-saving applications across residential and commercial spaces.

14 3/16"(W) x 5 1/2"(H) x 8 5/16"(D)

Features

- Single-wall painted steel housing with gasket for IC-rated airtight installation in insulated ceilings
- Airtight to prevent heated airflow diffusion
- IC-rated; can be directly installed on ceiling insulation lagging
- Listed for through-branch circuit wiring
- Contains nine 8-3/5" knockouts and four Romex pry-outs with strain relief
- Ground wire provided in J-box
- Three quick connectors provided on J-Box

Technical Specifications

Remodel Clips:

- Four remodel clips secure the housing and accommodate 1/2" and 5/8" ceiling materials.

Mechanical:

- Single-wall painted steel housing with gasket for IC-rated airtight installation in insulated ceilings
- Airtight to prevent heated airflow diffusion
- IC-rated; can be directly installed on ceiling insulation lagging

Junction Box:

- Listed for through-branch circuit wiring
- Contains nine 8-3/5" knockouts and four Romex pry-outs with strain relief
- Ground wire provided in J-box
- Three quick connectors provided on J-Box

Listings:

- UL listed for damp location.
- UL listed for Air Tight construction
- ETLus

Applications:



- Offer efficient, low-profile lighting for commercial, retail, and residential spaces, supporting both new construction and remodels with IC-rated, airtight options for optimal energy performance and code compliance




Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com |



Other Views:

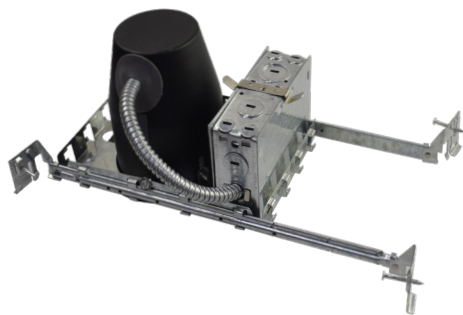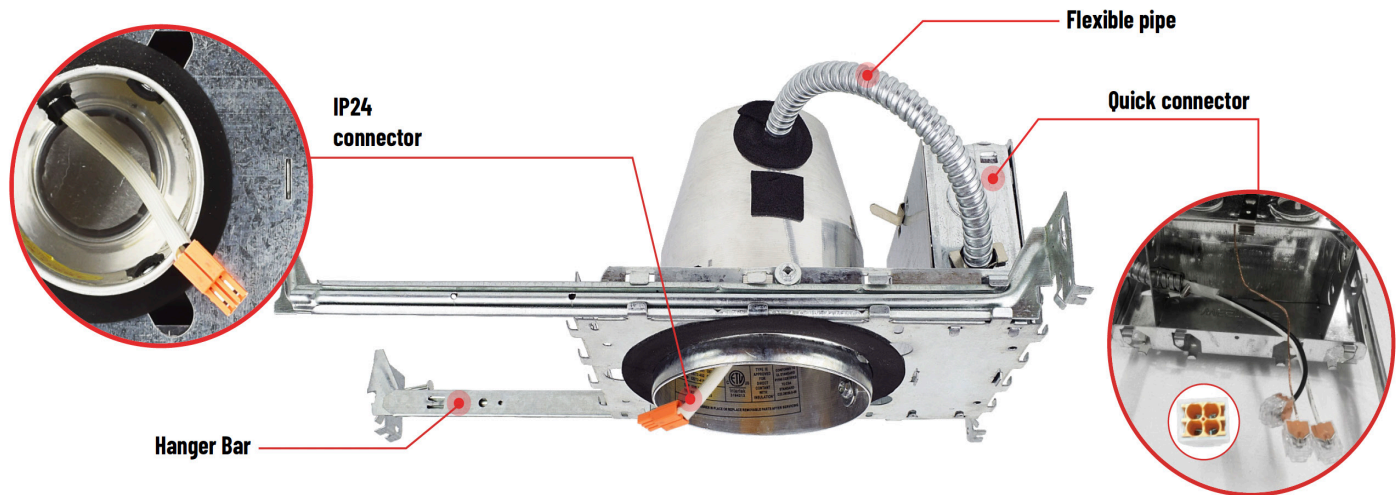


Top View

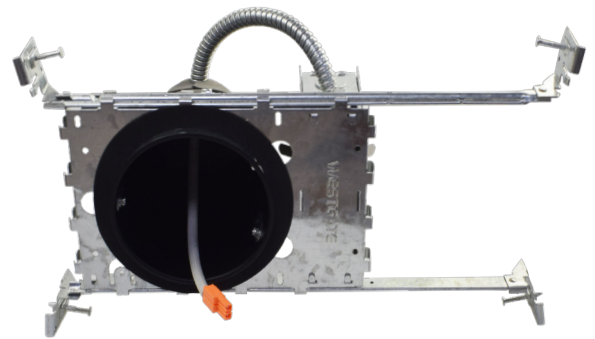

Bottom View

Westgate Compatible Recessed Trims:

RDD4

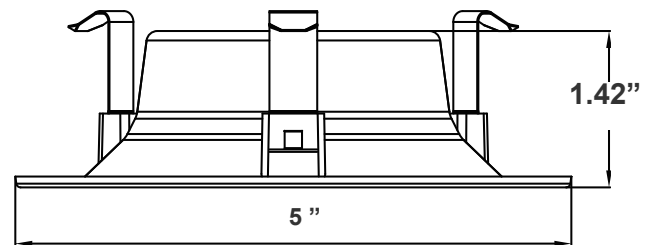


5"(W) x 1.42"(H)

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.
RDDF4-MCT5	6.5W	120V	650LM	2700K/ 3000K/ 3500K/ 4000K/ 5000K
RDDS4-MCT5	6.5W	120V	650LM	2700K/ 3000K/ 3500K/ 4000K/ 5000K




Westgate Compatible Recessed Trims:

RDP4

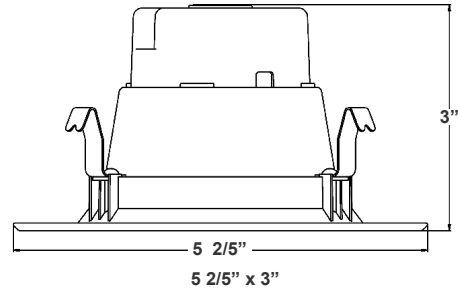

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.
RDPF4-MCT5	10W	120V	800LM	2700K/ 3000K/ 3500K/ 4000K/ 5000K
RDPS4-MCT5	10W	120V	800LM	2700K/ 3000K/ 3500K/ 4000K/ 5000K


RDP4

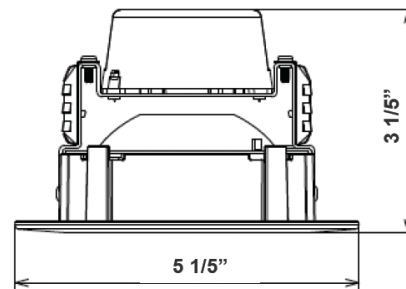

5 1/5"(D) x 3 1/5"(H)

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.
RDPF4-ADJ-MCT5	10W	120V	800LM	2700K/ 3000K/ 3500K/ 4000K/ 5000K



RDP4

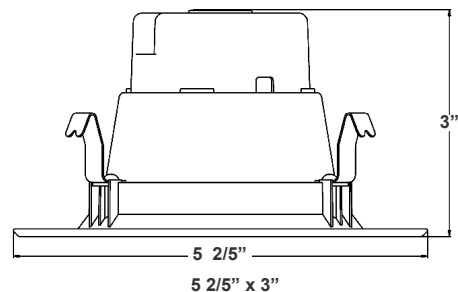

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.
RDPF4-MCTP	8W/10W/13W	120V	1040LM	2700K/ 3000K/ 3500K/ 4000K/ 5000K
RDPS4-MCTP	8W/10W/13W	120V	1040LM	2700K/ 3000K/ 3500K/ 4000K/ 5000K




RDL4-ST



5 1/4"(D) x 3 1/5"(H)

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.
RDL4-ST-MCT5	10W	120V	650LM	2700K/ 3000K/ 3500K/ 4000K/ 5000K
RDL4-ST-MCT5-ORB	10W	120V	650LM	2700K/ 3000K/ 3500K/ 4000K/ 5000K
RDL4-ST-MCT5-BK	10W	120V	650LM	2700K/ 3000K/ 3500K/ 4000K/ 5000K


RDL4-BF

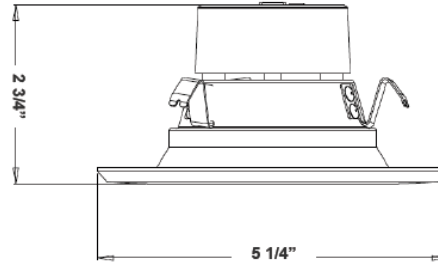

5 1/4" x 2 3/4"

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.
RDL4-BF-MCT5	10W	120V	700LM	2700K/ 3000K/ 3500K/ 4000K/ 5000K
RDL4-BF-MCT5-ORB	10W	120V	700LM	2700K/ 3000K/ 3500K/ 4000K/ 5000K
RDL4-BF-MCT5-BK	10W	120V	700LM	2700K/ 3000K/ 3500K/ 4000K/ 5000K

RDL4-ADJ


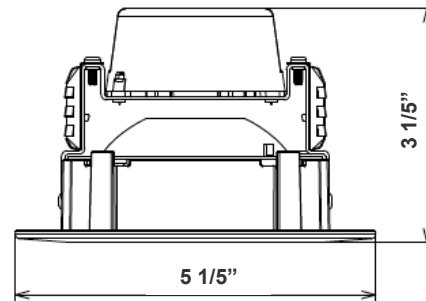


5 1/5"(D) x 3 1/5"(H)

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.
RDL4-ADJ-MCT5	10W	120V	650LM	2700K/ 3000K/ 3500K/ 4000K/ 5000K





RDL4-WP

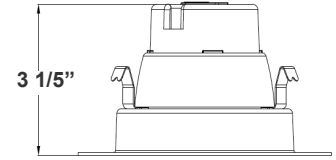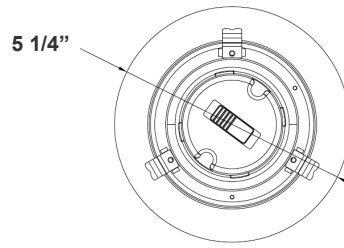

5 1/4"(D) x 3 1/5"(H)

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.
RDL4-MCT5-WP	8W	120V	650LM	2700K/ 3000K/ 3500K/ 4000K/ 5000K


RDMF4



2.23"(H) x 4.96"(D)

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.
RDMF4-MCT5	10W	120V	750LM	2700K/ 3000K/ 3500K/ 4000K/ 5000K
RDMF4-MCT5-ORB	10W	120V	750LM	2700K/ 3000K/ 3500K/ 4000K/ 5000K
RDMF4-MCT5-BK	10W	120V	750LM	2700K/ 3000K/ 3500K/ 4000K/ 5000K

TC-RDPS4

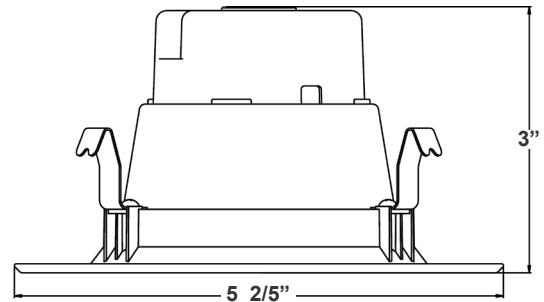


5 2/5"(W) x 3"(H)

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.
TC-RDPS4-10W-RGBW-WIFI	10W	120V	650LM	RGBW




Other Models:

HL4R-ICAT

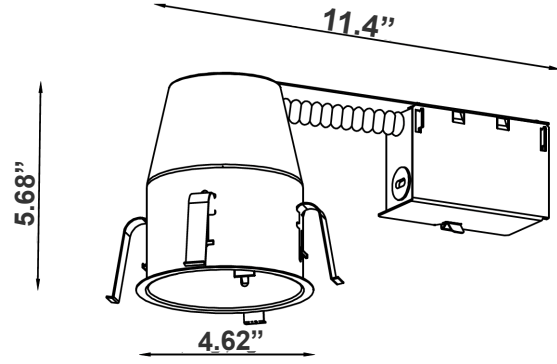



11.4"(W) x 5.68"(H) x 4.62"(D)

HL4RS-ICAT

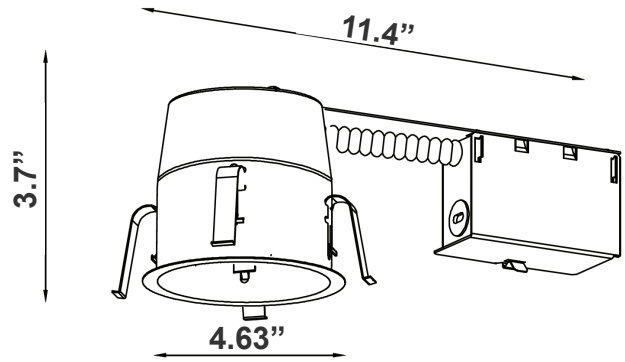

11.4"(W) x 4.63"(H) x 3.7"(D)

HL4S-ICAT

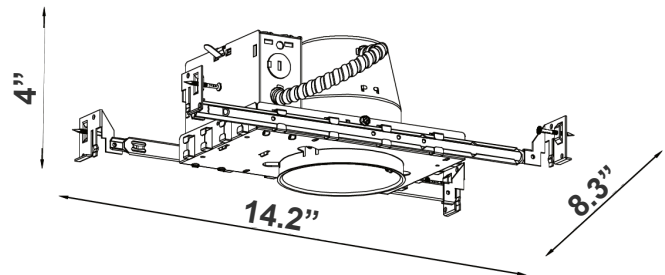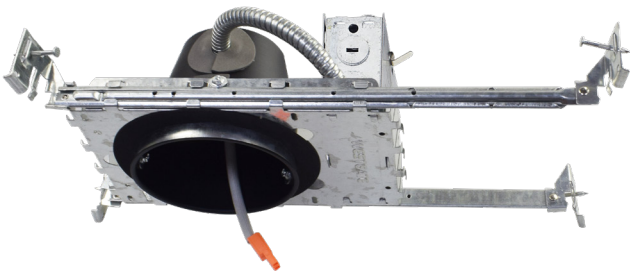

14.2"(W) x 4"(H) x 8.3"(D)

