

# HL SERIES Indoor Lighting

## HL6-ICAT

6In Led (TP24) Recessed Housing ICAT UL



**WESTGATE**  
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

Customer Name: \_\_\_\_\_

Project Name: \_\_\_\_\_

Note: \_\_\_\_\_

Type: \_\_\_\_\_

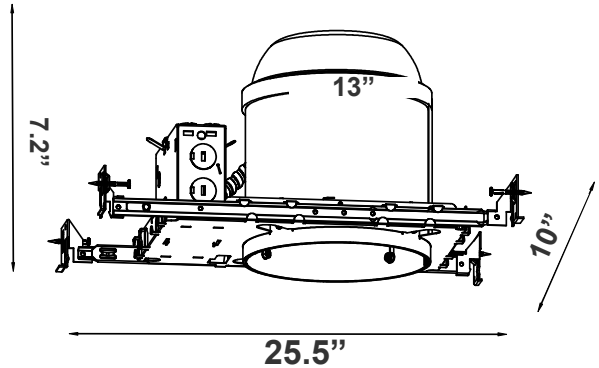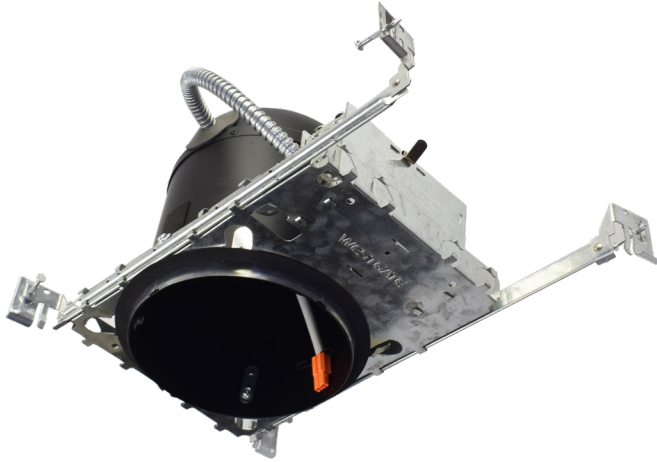

25.5"(W) x 7.2"(H) x 10"(D)

LED Recessed Housings are efficient, IC-rated fixtures designed for seamless ceiling integration. Ideal for both new construction and remodels, they offer dimming capabilities, airtight options, and excellent thermal management, making them perfect for energy-saving applications across residential and commercial spaces.

## Features

- Single-wall painted steel housing with gasket for IC-rated airtight installation in insulated ceilings
- Airtight to prevent heated airflow diffusion
- IC-rated; can be directly installed on ceiling insulation lagging
- Listed for through-branch circuit wiring
- Contains nine 8-3/5" knockouts and four Romex pry-outs with strain relief
- Ground wire provided in J-box
- Three quick connectors provided on J-Box

## Technical Specifications

### Remodel Clips:

- Four remodel clips secure the housing and accommodate 1/2" and 5/8" ceiling materials.

### Mechanical:

- Single-wall painted steel housing with gasket for IC-rated airtight installation in insulated ceilings
- Airtight to prevent heated airflow diffusion
- IC-rated; can be directly installed on ceiling insulation lagging

### Junction Box:

- Listed for through-branch circuit wiring
- Contains nine 8-3/5" knockouts and four Romex pry-outs with strain relief
- Ground wire provided in J-box
- Three quick connectors provided on J-Box

### Listings:

- UL listed for damp location.
- UL listed for Air Tight construction
- Meet Title24 requirement
- ETLus

### Applications:


- Offer efficient, low-profile lighting for commercial, retail, and residential spaces, supporting both new construction and remodels with IC-rated, airtight options for optimal energy performance and code compliance




Phone: (877) 805-2252 | Fax: (877) 805-2252  
www.westgatemfg.com |



**Other Views:**

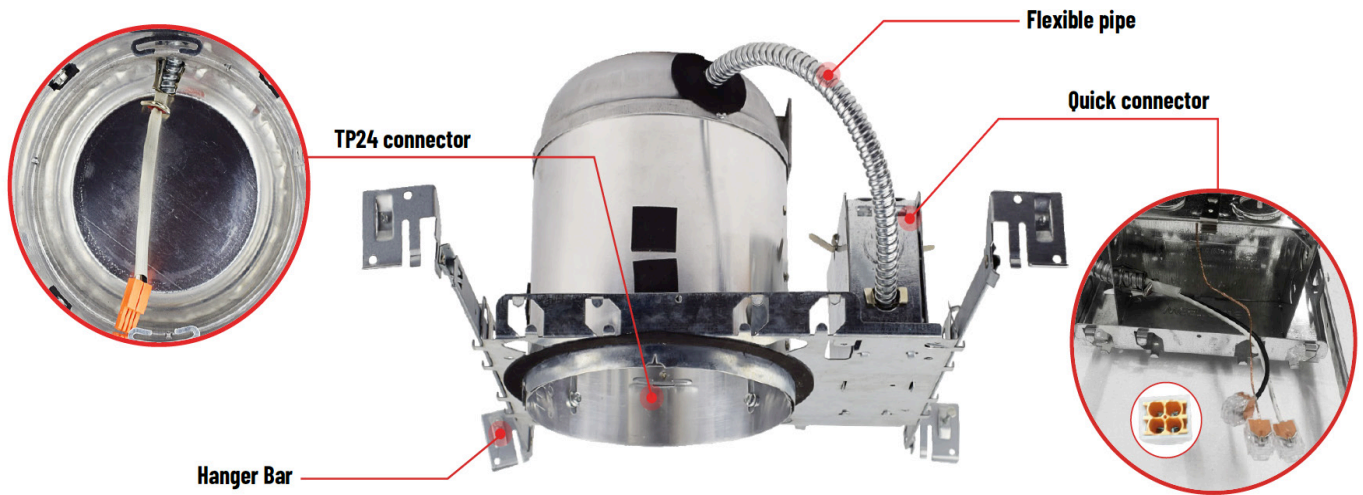


Top View

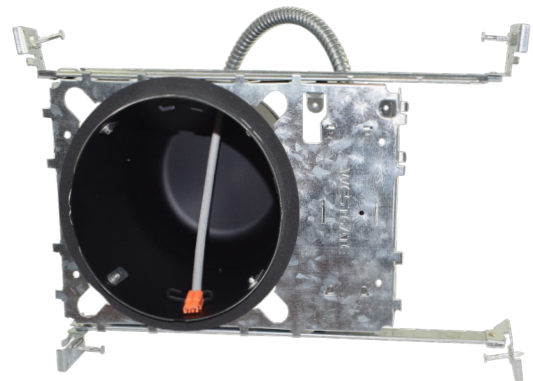

Bottom View

**Westgate Compatible Recessed Trims:**

RDD6

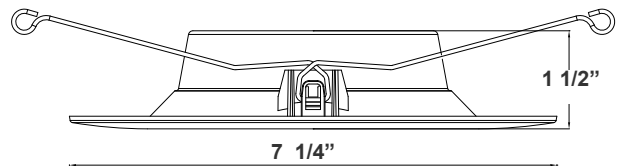


1 1/2"(H) x 7 1/4"(W)

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.
RDDF6-MCT5	10W	120V	1000LM	2700K/ 3000K/ 3500K/ 4000K/ 5000K
RDDS6-MCT5	10W	120V	1000LM	2700K/ 3000K/ 3500K/ 4000K/ 5000K




## Westgate Compatible Recessed Trims:

RDP6

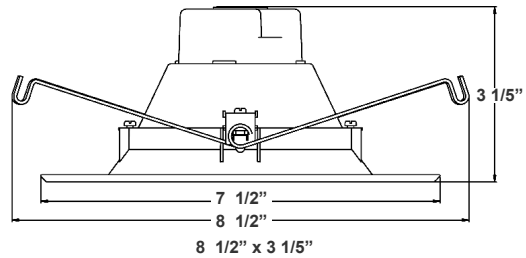


MODEL NO.	Wattage	Voltage	Lumens	Color Temp.
RDPF6-MCT5	10W	120V	1040LM	2700K/ 3000K/ 3500K/ 4000K/ 5000K
RDPS6-MCT5	10W	120V	1040LM	2700K/ 3000K/ 3500K/ 4000K/ 5000K

RDP6

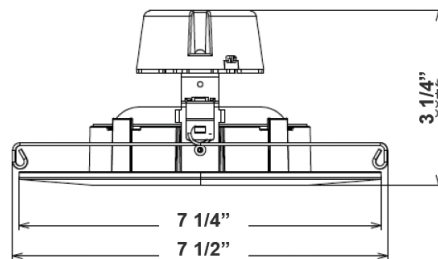

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.
RDPF6-ADJ-MCT5	11W	120V	880LM	2700K/ 3000K/ 3500K/ 4000K/ 5000K


RDP6

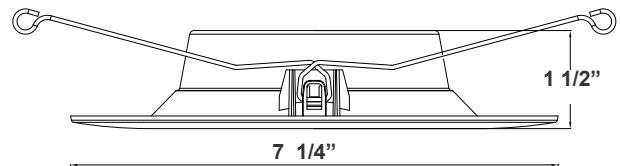

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.
RDPF6-MCTP	10W/13W/17W	120V	1360LM	2700K/ 3000K/ 3500K/ 4000K/ 5000K
RDPS6-MCTP	10W/13W/17W	120V	1360LM	2700K/ 3000K/ 3500K/ 4000K/ 5000K




## RDL6-ST

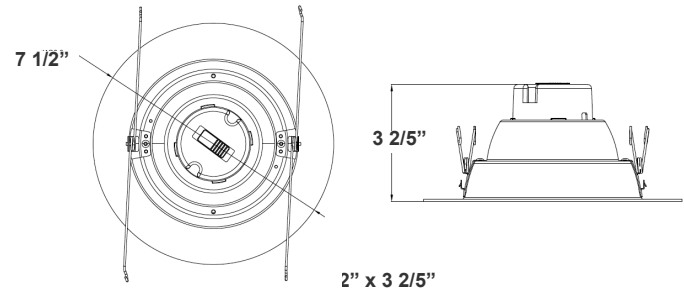


MODEL NO.	Wattage	Voltage	Lumens	Color Temp.
RDL6-ST-MCT5	15W	120V	1140LM	2700K/ 3000K/ 3500K/ 4000K/ 5000K
RDL6-ST-MCT5-ORB	15W	120V	1140LM	2700K/ 3000K/ 3500K/ 4000K/ 5000K
RDL6-ST-MCT5-BK	15W	120V	1140LM	2700K/ 3000K/ 3500K/ 4000K/ 5000K

## RDL6-BF

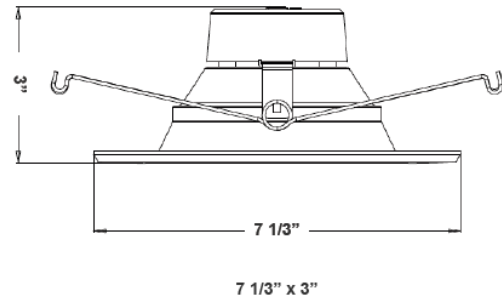

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.
RDL6-BF-MCT5	15W	120V	1140LM	2700K/ 3000K/ 3500K/ 4000K/ 5000K
RDL6-BF-MCT5-ORB	15W	120V	1140LM	2700K/ 3000K/ 3500K/ 4000K/ 5000K
RDL6-BF-MCT5-BK	15W	120V	1140LM	2700K/ 3000K/ 3500K/ 4000K/ 5000K


## RDL6-ADJ

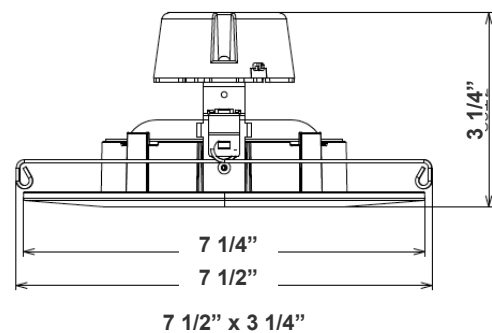

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.
RDL6-ADJ-MCT5	11W	120V	990LM	2700K/ 3000K/ 3500K/ 4000K/ 5000K




RDL6-WP

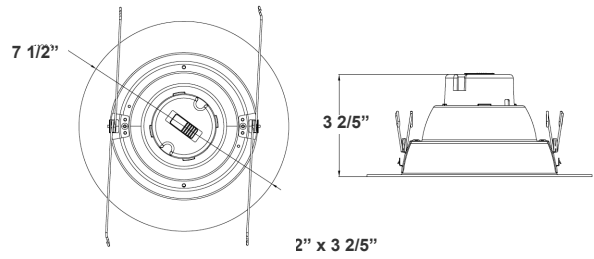

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.
RDL6-MCT5-WP	14W	120V	1140LM	2700K/ 3000K/ 3500K/ 4000K/ 5000K


RDMF6

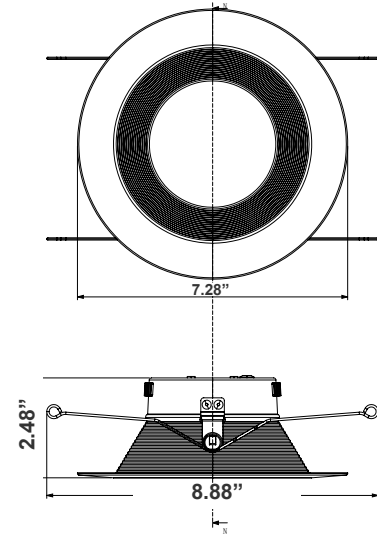

2.48"(H) x 8.88"(W) x 7.28"(D)

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.
RDMF6-MCT5	14W	120V	1050LM	2700K/ 3000K/ 3500K/ 4000K/ 5000K
RDMF6-MCT5-ORB	14W	120V	1050LM	2700K/ 3000K/ 3500K/ 4000K/ 5000K
RDMF6-MCT5-BK	14W	120V	1050LM	2700K/ 3000K/ 3500K/ 4000K/ 5000K

TC-RDPS6

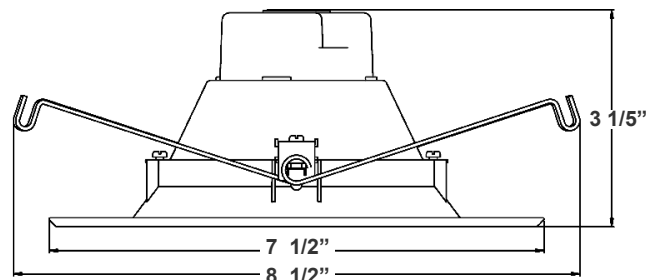


8 1/2" x 3 1/5"

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.
TC-RDPS6-13W-RGBW-WIFI	13W	120V	850LM	RGBW




**Other Models:**

HL6R-ICAT

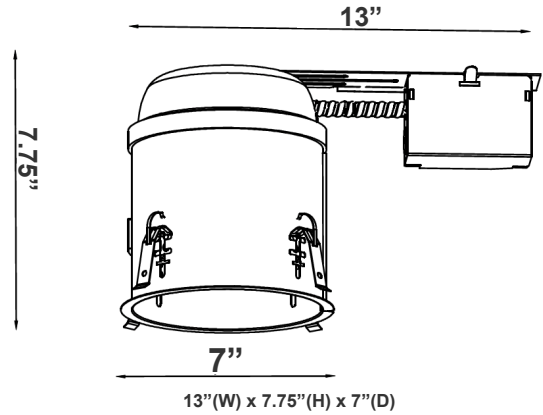



MODEL NO.	DESCRIPTION
HL6R-ICAT	6In Led (TP24) Remodel Recessed Housing ICAT UL

HL6RS-ICAT

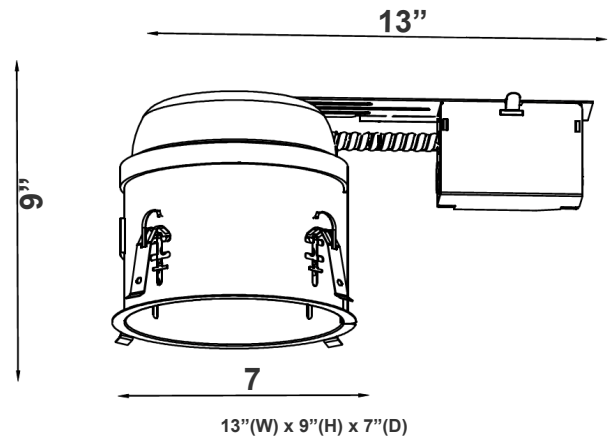

MODEL NO.	DESCRIPTION
HL6RS-ICAT	6In Led (TP24) Shallow Remodel Recessed Housing ICAT UL

HL6S-ICAT

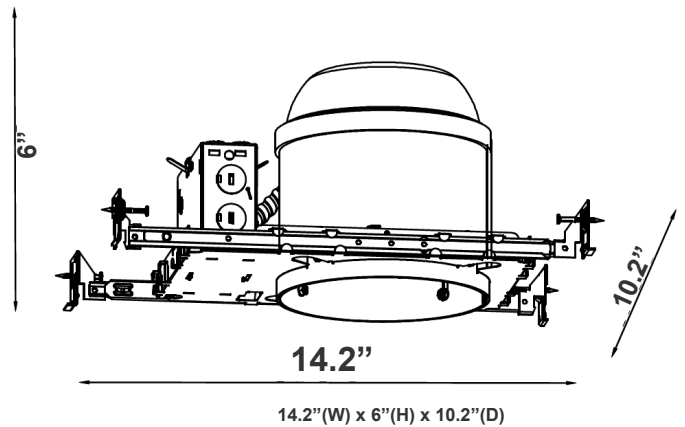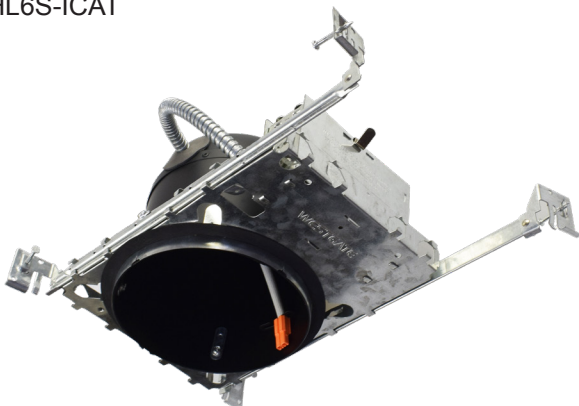

MODEL NO.	DESCRIPTION
HL6S-ICAT	6In Led (TP24) Shallow Recessed Housing ICAT UL

