

JOB NAME: _____


DATE: _____

TYPE: _____



DIMENSIONS:

6.89"(H) x 3.9"(D)

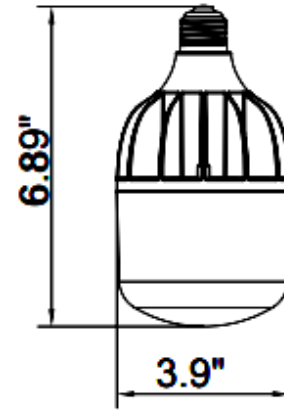

HPL-24W-50K-E26
HPL-24W-30K-E26

LED HIGH POWER LAMPS

Ideal for retrofitting existing HID high bay, it can be used in enclosed luminaires

ELECTRICAL SPECIFICATIONS:

- Voltage: 120-277VAC 50/60Hz
- Wattage: 24W
- Power factor: >0.90
- Efficacy: 125LM/W
- THD: 25%

HOUSING SPECIFICATIONS:

- Plastic Housing
- No fan housing (New Technology)
- Lamp base: E26 Mogul Base
- Operating temperature: -4°F ~ 122°F
- Lifespan: 50,000 hrs.
- IP rating: suitable for damp location

CERTIFICATIONS: UL



MODEL	WATTS	VOLTAGE	LUMENS	COLOR TEMP
HPL-24W-50K-E39	24W	120~277VAC	3000LM	5000K
HPL-24W-30K-E39	24W	120~277VAC	3000LM	3000K

LIGHTING SPECIFICATIONS:

- Lens: PC Lens
- Total lumens: 3000LM
- Color temperature: 5000K/3000K
- Color rendering index: >80
- Beam Angle: 200°

WARRANTY: 5 years

