

# HPL SERIES Industrial Lighting


HPL-32W-30K-E26  
HPL-32W-50K-E26



Customer Name: \_\_\_\_\_

Project Name: \_\_\_\_\_

Note: \_\_\_\_\_ | Type: \_\_\_\_\_

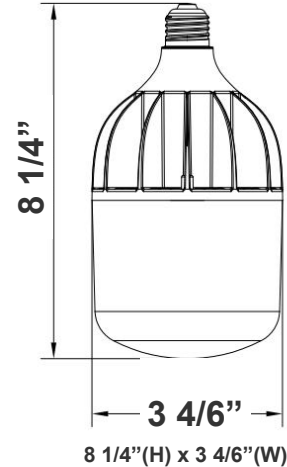

Ideal for Retrofitting Existing HID High Bay, It Can Be Used in Enclosed Luminaires.

## Features

- Lamp base: E26 Medium Base
- 5-Year Warranty
- Plastic Housing
- 50,000 Hours Rated Life

## Technical Specifications

### Electrical:

- Voltage: 120-277V AC 50/60Hz
- Wattage: 32W
- Power Factor: >0.9
- THD: ≤25%
- Efficacy: 125 LPW

### Lighting:

- Lens: PC Lens
- Total lumens: 4000LM
- Color temperature: 3000K/5000K
- Color rendering index: >80
- Beam Angle: 200°
- 50,000 Hours Rated Life

### Mechanical:

- Plastic Housing
- No fan housing (New Technology)
- Lamp Base: E26 Medium Base
- Operating temperature: -4°F ~ 122°F
- Do not use the lamps in enclosed fixtures
- Suitable for damp location
- 5-Year Warranty

### Applications:



- Ideal for Retrofitting Existing HID High Bay, It Can be Used in Enclosed Luminaires

### Other Models:


- 16W | 2000LM | HPL-16W-30K-E26
- 16W | 2000LM | HPL-16W-50K-E26
- 24W | 3000LM | HPL-24W-30K-E26
- 24W | 3000LM | HPL-24W-50K-E26
- 40W | 5000LM | HPL-40W-30K-E26
- 40W | 5000LM | HPL-40W-50K-E26



## Photometrics: HPL-32W-E26



BUD Rating: B2-U3-G3

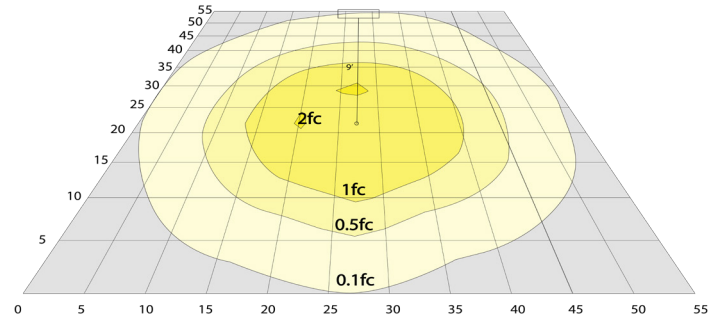

32W, 5000K Area 55'x 55' Mounting Height: 9'

## Performance Table: HPL-32W-E26

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
HPL-32W-30K-E26	32W	120~277V	4000LM	3000K	B2-U3-G3	125
HPL-32W-50K-E26	32W	120~277V	4000LM	5000K	B2-U3-G3	125

## Sample Ordering

**Model Wattage Color Temp. Base**

HLP - 32W -  - E26

30K = 3000K  
50K = 5000K

### Accessory:

Blank = No Option For Accessories

E26-ENLARGER = ENLARGES E26 BULB TO BE USED IN E39 SOCKET

### ACCESSORY:



E26-ENLARGER

### Example:

- HPL-32W-30K-E26 (FOR HPL 32W FIXTURE 120-277V)
- HPL-32W-30K-E26 (FOR HPL 32W FIXTURE 120-277V)  
E26-ENLARGER (ENLARGES E26 BULB TO BE USED IN E39 SOCKET)

