

IGLA SERIES LANDSCAPE LIGHTING

IGLA-7W-RGBWW-BT-BN
INTEGRATED LED WELL LIGHT



Selection:




Customer Name: _____

Project Name: _____

Note: _____

Type: _____

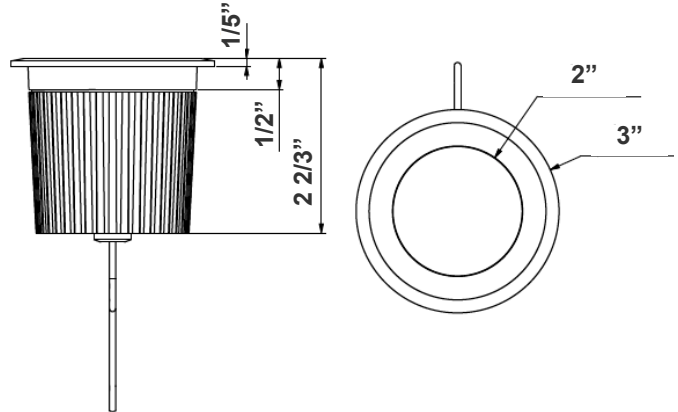

2 2/3"(H) x 3"(W)

The fixture has classic traditional appearance, professional light distribution design, ideal for park landscaping, garden, architectural landscape lighting, suitable for wet locations

Features

- Die-cast Aluminum Housing
- Solid State Lighting Technology for Long Life, No Maintenance Needed and High-Efficiency
- 1-Year Warranty
- Optical PC Flat Lens
- Built in integrated LED

Technical Specifications

Electrical:

- Voltage: 12-24V AC/DC
- Power Factor: >0.9
- Wattage: 7W
- Input current: 1A Max
- Efficacy: 100LPW
- Bluetooth Connection Range: Approximately 30 feet (10 meters). Maximum Communication Range Will Vary Depending On Obstacles (Person, Metal, Wall, etc.) Or Electromagnetic Environment.

Mechanical:

- Die-cast Aluminum Housing
- Traffic Rated: They are not likely to get damaged from activity around the light, including lawn care, as well as foot and auto traffic
- Optical PC Flat Lens
- 3' SPT-2 18AWG Lead Wire
- 4" PVC Sleeve with three 1/2" KO. 2 on sides, 1 on bottom
- Solid State Lighting Technology for Long Life, No Maintenance Needed and High-Efficiency
- High Conductive Aluminum LED Board
- IP Rating: IP67
- Operating Temperature: -4°F to 104°F
- Suitable for Wet Locations
- 1-Year Warranty

Lighting:




- Built in integrated LED
- Total lumens: 720LM
- Color Temperatures: RGBW Seletable Through Phone App
- Color Rendering Index: CRI ≥ 90
- Beam Angle: 70°
- Lifespan: 50,000 Hrs.

Applications:

- The fixture has classic traditional appearance, professional light distribution design, ideal for park landscaping, garden, architectural landscape lighting, suitable for wet locations



Photometrics: IGLA-7W-RGBWW-BT-BN

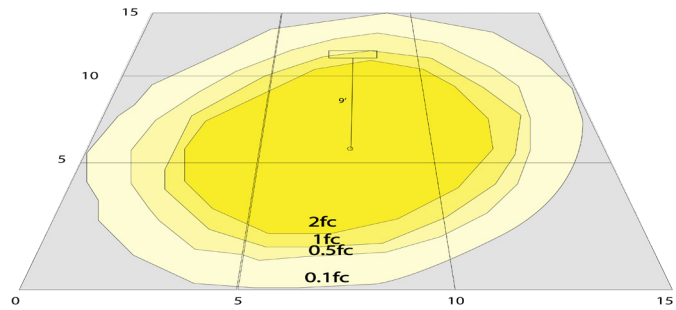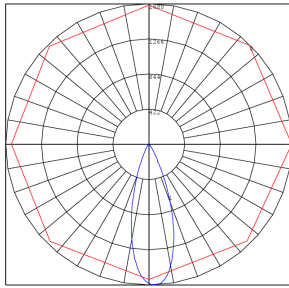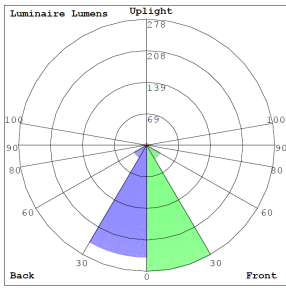

BUG Rating: B1-U1-G0

7W 3000K, Area 15'x 15' Mounting Height: 9'

Other Views:



Side View



Top View



Bottom View

Performance Table: IGLA-7W-RGBWW-BT-BN

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
IGLA-7W-RGBWW-BT-BN	7W	12-24V	700LM	RGBWW	B1-U1-G0	1002

Sample Ordering

Model	Style	Color Temp.	Bluetooth	Finish
IGLA	7W	RGBWW	BT	BN

Accessories:

Blank = No Option For Accessories

LSWN1 = Bag of 24, Waterproof Wire Connectors, For Up to Two 14-2 + One 16-2 Cables

LSWN2 = Box of 24, Waterproof Wire Connectors, For Up to Three 12-2 Cables

LSWN2-100 = Jar of 100, Waterproof Wire Connectors, For Up To Three 12-2 Cables

ACCESSORIES:



LSWN2-100

Jar of 100, Waterproof wire connectors, for up to three 12-2 cables



LSWN1

Bag of 24, Waterproof wire connectors, for up to two 14-2 + one 16-2 cables



LSWN2

Box of 24, Waterproof wire connectors, for up to three 12-2 cables



Westgate Smart

Download the Smart life App



WESTGATE

Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com

