# LCFE SERIES RESIDENTIAL LIGHTING



LCFE-MCT5-BN
INTEGRATED LED SQUARE HOLOGRAM GLASS PEDANT
MUITI COIOr Temperature (Selectable)



Avail Finish:

Integrated LED glass pendant is a contemporary and stylish design that can be used by itself as an accent piece, or grouped together to light a kitchen island, bar, or pool table.

Customer Name:
Project Name:
Note: Type:

60"(H) x 4 3/4"(W)

4"

# **Features**

- Multi CCT (Selectable The Switch Is In The Canopy)
- Brushed Nickel Finish

- 5-Year Warrantv
- Polycarbonate Lens

# **Technical Specifications**

#### **Electrical:**

Voltage: 120V AC 50/60Hz

Wattage: 12WPower Factor: >0.90Efficacy: 60 LPW

### **Mechanical:**

- Brushed Nickel Finish
- The Rod's Total Length is 54". It Consists Of One 6" And Four 12" Threaded Rods For A Seamless Down Rod Appearance In The Desired Length
- Glass Material: 5/64" (2mm) thickness, Ultra Clear Glass
- Power Cord is 60" Long
- Maximum Ambient Temperature: -22°F to 104°F
- IP20 indlor Only

# Lighting:

- Dimming: TRIAC Dimming (Dimmable Down to 5% Compatible With Traic and ELV Dimmers)
- Total Lumens: 720LM
- Color Temperatures: 2700K/3000K/3500K/4000K/5000K
- Multi CCT (Selectable Switch on Back Of The Fixture )
- Color Rendering Index: CRI ≥ 90
- Beam Angle: 120°
- Rated life: 50.000 Hrs

# **Applications:**

 Integrated LED glass pendant is a contemporary and stylish design that can be used by itself as an accent piece, or grouped together to light a kitchen island, bar, or pool table.

#### Other Models:

• 12W | 720LM | LCFE-MCT5-BK











### Photometrics: LCFE-MCT5-BN





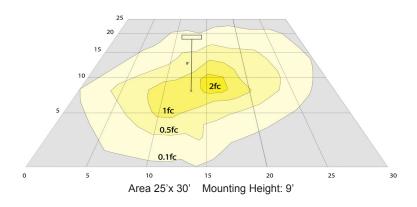

BUG Rating: B0-U3-G1

# Other Views:







Glass Lens View

Top View

Performance Table: LCFE-MCT5-BN

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LCFE-MCT5-BN	12W	120V	720LM	2700K/ 3000K/ 3500K/ 4000K/ 5000K	B1-U1-G0	60

# Sample Ordering

Model Color Temp. **Finish** BN

LCFE -MCT5

Other Model: LCFE-MCT5-BK







Glass Lens View

Top View



