


LCL SERIES Commercial Lighting

LCL-4FT-40W-MCTP-EM-SEN
POWER & CCT ADJUSTABLE LINEAR CORNER CORRIDOR
WITH BI-LVL SENSOR & EMERGENCY BACKUP


MCTP Multi Color Temperature & Multi Power/Wattage (Selectable)

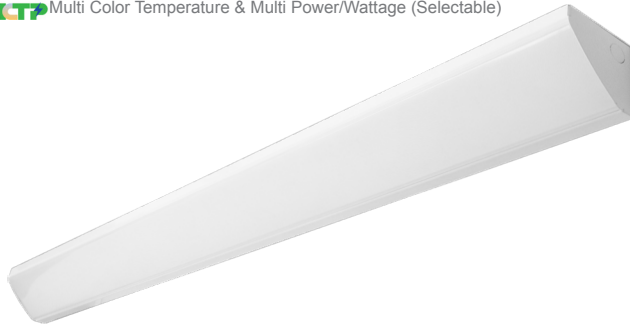

Customer Name: _____

Project Name: _____

Note: _____ | Type: _____

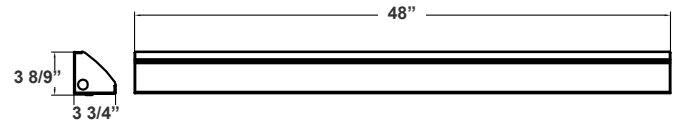

48"(w) x 3 8/9"(H) x 3 3/4"(D)

LED Strip Light is a cost-effective, energy-efficient lighting fixture for surface mount applications such as corridors, stairwells, public rooms, schools, hospitals utility areas, etc. Engineered with stable performance LED engines and the world's top brand LED driver. Same footprint as traditional 2-lamp strip lights

Features

- LED Strip Lights
- 5-Year Warranty
- 50,000 Hours Rated Life
- Lens: Frosted Diffuse Polycarbonate Lens
- MCTP: Multi Color Temperature and Power (Selectable Switch Inside Fixture)

Technical Specifications

Electrical:

- Voltage: 120-277VAC 50/60Hz
- Wattage: 20W/30W/40W
- Power Factor: >0.98
- Efficacy: 115 LPW

Mechanical:

- White Finish
- Housing: Heavy Die-Formed Steel, White Powder Coated
- Lens Snaps into the tabs of the Housing Fixture
- Mounting: Surface Mount, Wall Mount
- Operating Temperature: -22°F -104°F
- Suitable for Damp Location

Lighting:

- Dimmable: 0~10V Dimming
- Total Lumens: 2300LM/ 3450LM/ 4600LM
- Color Temperatures: 3500K/ 4000K/ 5000K
- Multi-CCT (selectable switch inside fixture)
- Color Rendering Index: CRI ≥ 80

Emergency Battery Backup Spec:

- Output Power: 4W
- Output Voltage: 50V
- Li-Ion Battery / >90 Minutes Emergency Operation
- Test Button Installed on The Side of The

Sensor Spec:



- Detection Range: 17Ft. / 360°
- Mounting Height: 25Ft. Max.
- DIP Settings switch on The Sensor
- Optional Remote Control (WEC-3RC)

Applications:


- Ideal for architectural lighting solutions, a variety of industrial, commercial and residential applications



Photometrics: LCL-4FT-40W-MCTP-EM-SEN



BUD Rating: B1-U3-G2

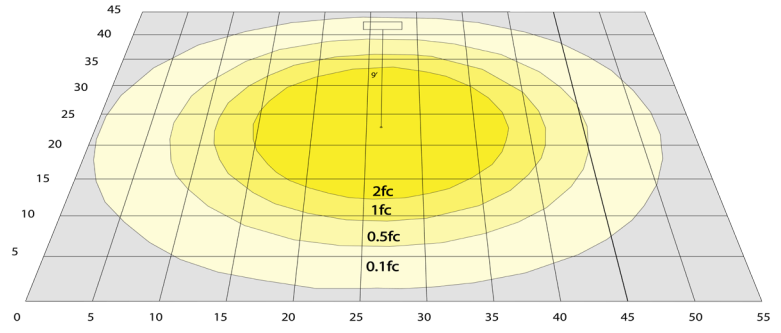

Area 45'x 55' Mounting Height: 9'

Other Views:



Side View



Front View



Back View

Performance Table: LCL-4FT-40W-MCTP-EM-SEN

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LCL-4FT-40W-MCTP-EM-SEN	20W	120~277V	2300LM	3500K	B1-U3-G2	115
	30W		3450LM	4000K		
	40W		4600LM	5000K		

Sample Ordering

Model Size Wattage Color Temp. Battery Sensor

LCL - 4FT - 40W - MCTP - EM - SEN

Factory-Installed Options:

Blank = No Option For Accessories
 OPT-EM-LCL= INTERNAL EMERGENCY BACKUP BATTERY
 OPT-SEN-2US= ULTRASONIC BI-LEVEL DIMMING
 OPT-SEN-LLHB-OC1 = LLHB-OC1 EXTERNAL STANDARD PIR OPT-SENSOR
 OPT-HBC-125TL-WH = NEMA TWIST-LOCK PLUG 8FT, 15A, 125V, WHITE
 OPT-HBC-277TL-WH = NEMA TWIST-LOCK PLUG 8FT, 15A, 277V, WHITE
 OPT-HBC-125SB-WH = STRAIGHT BLADE PLUG 10FT, 15A,125V, 3-CONDUCTOR 18AWG,WHITE
 OPT-2P-58 = OPTIONAL REMOTE CONTROL
 WEC-3RC = (REMOTE NOT NEEDED)
 OPT-HBC-125SB-WH = STRAIGHT BLADE PLUG 10FT, 15A,125V, 3-CONDUCTOR 18AWG,WHITE
 OPT-HBC-125SB-WH = STRAIGHT BLADE PLUG 10FT, 15A,125V, 3-CONDUCTOR 18AWG,WHITE

FACTORY-INSTALLED OPTIONS:



OPT-HBC-125SB-WH



OPT-HBC-125TL-WH



OPT-HBC-277TL-WH



OPT-EM-LCL



OPT-SEN-2US



OPT-SEN-LLHB-OC1

