




Photometrics: LDS-MCT-D



BUG Rating: B0-U3-G1

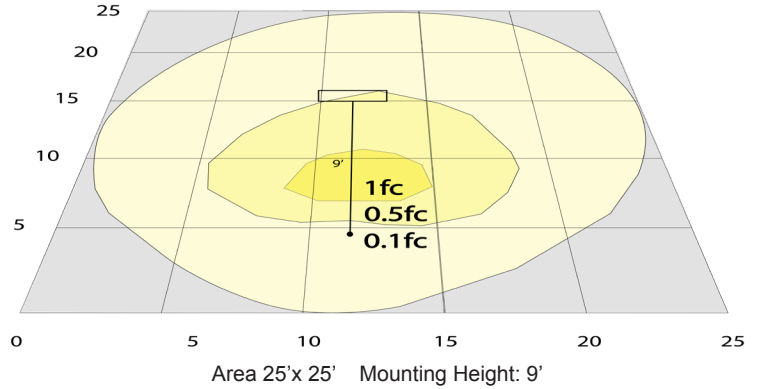

Area 25'x 25' Mounting Height: 9'

Other Views:



Side View



Front View



Back View

Performance Table: LDS-MCT-D

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LDS-MCT-D	12W	120V	1200LM	3000K/ 4000K/ 5000K	B0-U3-G1	100

Sample Ordering

Model Color Temp. Dimming

LDS - MCT - D

Factory-Installed Option:

Blank = No Option For Accessories

OPT-EM-LDS = EMERGENCY BATTERY BACKUP

OPT-PC-B1 = BUTTON


OPT-SEN-LDS-GY = PROGRAMMABLE MICROWAVE BI-LEVEL SENSOR

WEC-8RC= OPTIONAL REMOTE CONTROL

FACTORY-INSTALLED OPTION:



OPT-EM-LDS
EMERGENCY BATTERY BACKUP



OPT-SEN-LDS-GY
PROGRAMMABLE MICROWAVE
BI-LEVEL SENSOR



WEC-8RC
OPTIONAL REMOTE CONTROL



OPT-PC-B1
BUTTON

Example:

1. LDS-MCT-D

(FOR LDS 12W MCT FIXTURE 120V)

2. LDS-MCT-D

(FOR LDS 12W MCT FIXTURE 120V)

OPT-EM-LDS

(EMERGENCY BATTERY BACKUP)

