

# LDSB SERIES Outdoor Lighting

LDSB-40-MCTP-DD-ORB

40" OUTDOOR/INDOOR LED DECORATIVE WALL SCONCE

**MCTP** Multi Color Temperature & Multi Power/Wattage (Selectable)



SELECTION:



Wall sconce fixture updated with the latest in LED technology. It provides accent illumination that visually expands the space and creates a relaxing atmosphere. Ideal for use in hallways, stairways, dining areas, foyers, and meeting rooms for residential and commercial applications. The long LED life, coupled with exceptional color rendering, make this fixture attractive for new or retrofit projects.

# WESTGATE


THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

Customer Name: \_\_\_\_\_

Project Name: \_\_\_\_\_

Note: \_\_\_\_\_

Type: \_\_\_\_\_

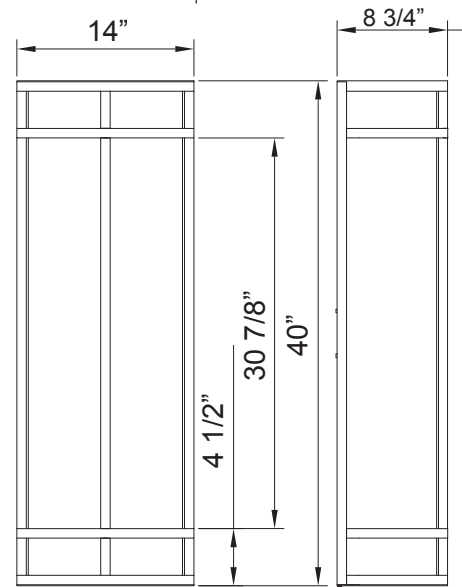

40"(H) x 14"(W) x 8 3/4"(D)

## Features

- High-Transmission Frosted Plastic Lens with Excellent Distribution and Uniformity
- Direct replacement for Fluorescent
- Full distribution LED luminaries
- 70,000 Hours Rated Life
- 7-Year Warranty

## Technical Specifications

### Electrical:

- Voltage: 120-277V
- Wattage: 40W/60W/80W
- Power Factor: >0.9
- Efficacy: 80 LPW

### Mechanical:

- Die-Cast Aluminum Housing With Powder Coat Finish
- High-Transmission Frosted Plastic Lens With Excellent Distribution and Uniformity
- Direct Replacement For Fluorescent
- Full Distribution LED luminaries
- IP Rating: IP65
- Operating Temperature: -4°F to 113°F
- Suitable For Wet Locations

### Lighting:

- Dimming: (Dual Function) Triac Dimmable at 120V& 0-10V Dimming at 120-277V
- Multi CCT: Selectable CCTs Switch Located On The LED Board
- Total Lumens: 6400LM
- Color Temperature: 3000K/4000K/5000K
- Color Rendering Index: ≥ 80
- Beam Angle: 120°

### Applications:

- Motel, Hotels, Hospitals, hallways, stairways, dining areas, foyers, and meeting rooms

### Other Models:

- 80W | 6400LM | LDSB-40-MCP-DD-SIL
- 30W | 2400LM | LDSC-18-MCTP-DD-BK





Phone: (877) 805-2252 | Fax: (877) 805-2252  
www.westgatemfg.com




WG-ZB-ZB-2Z

## Photometrics: LDSB-40-MCTP-DD-ORB



BUG Rating: B1-U3-G1

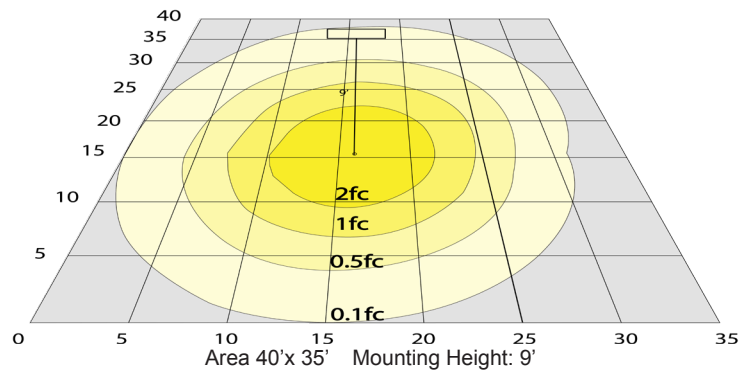

## Other Views:



Side View



Front View



Bottom View

## Performance Table: LDSB-40-MCTP-DD-ORB

| MODEL NO.           | Wattage           | Voltage | Lumens                     | Color Temp.             | BUG Rating | LPW |
|---------------------|-------------------|---------|----------------------------|-------------------------|------------|-----|
| LDSB-40-MCTP-DD-ORB | 40W<br>60W<br>80W | 120V    | 2400LM<br>4800LM<br>6400LM | 3000K<br>4000K<br>5000K | B1-U3-G1   | 80  |

## Sample Ordering

**Model**    **Size**    **Color Temp.**    **Dimming**    **Housing**

LDSB - 40 - MCTP - DD - ORB

## Factory-Installed Options:

Blank = No Option For Accessories

OPT-EM-LDSB= EMERGENCY BACKUP INTERNAL BATTERY, BACK BOX

OPT-PC-B = PHOTOCCELL

## FACTORY-INSTALLED OPTIONS:



OPT-EM-LDSB

