

LEDDR SERIES RIBBON

LEDDR-24V-120W-UNIV

5-IN-1 DIMMABLE ELECTRONIC LED DRIVER WITH JUNCTION BOX

WESTGATE
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!






A 5-in-1 dimmable electronic LED driver with a junction box is a versatile power supply device used for LED lighting systems. It typically offers multiple dimming options, such as TRIAC, 0-10V, MLV, ELV, and PWM dimming, allowing flexibility in controlling the brightness of LED lights. These drivers are often designed to provide constant voltage output, ensuring stable and efficient operation of LED fixtures. Additionally, they may feature a junction box for easier installation and wiring connections.

Customer Name: _____

Project Name: _____

Note: _____

Type: _____

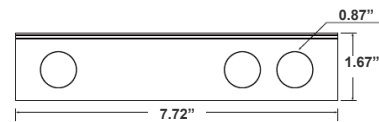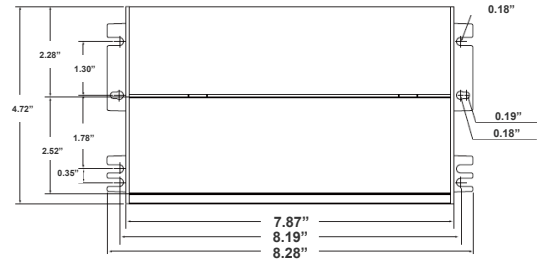

4.72"(H) x 8.28"(W) x 1.67"(D)

Features

- Output Constant Voltage
- UL, cUL Listed, Class 2 Unit, Type HL Rated. FCC
- Universal AC Input: 100-277VAC
- Built-in Active PFC Function
- High Efficiency: Up To 87%
- Load: 10-100%
- Protection: Short Circuit/Overloading
- PWM Output Does Not Change The Color Index
- Full Protection Metal Case, For Dry, Damp, Wet Location
- Flicker-Free
- Phase Dimming: Work With Forward Phase /Leading Edge, MLV And Reverse Phase /Trailing Edge, ELV, TRIAC Dimmers

Technical Specifications

Output:

- Voltage: 120-277V
- Output Voltage: 24V DC
- Output Voltage Range: 18-25V
- Output Current: 5A Max
- Output Power: 120W
- Output Ripple & Noise: $\leq 600\text{mV}$

Input:

- Input Voltage Range: 100V AC - 277V AC
- Input Frequency Range: 50-60HZ
- Input Current: 1.3A@110VAC
- Surge Current (Cold Start): 20A, 50%, 1.6ms @120Vac / 25A, 50%, 1.4ms @277Vac
- Power Efficiency: 85% @ 220V AC
- PF: 0.95
- Leakage Current: $< 0.75\text{mA}$

Protection:

- Short-Circuit Protection: Hiccup Mode, and Automatic Recovery
- Over-Voltage Protection: Shut Down the Output When Non-Load Voltage is $\geq 28\text{V}$, and Automatic Recovery

Environment:

- Working Temperature: -22°F to 140°F
- Working Humidity: 20%-90%RH
- Approved Environments Location: Suitable for Dry, Damp, and Wet locations
- Storage Temperature: -40°F to 176°F
- Storage Humidity: 10% - 95%RH
- Vibration: 10~500Hz, 1.0mm, 15 minutes(for X,Y, Z Each Axis)
- Tcase: 194°F



Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com




Safety & EMC:

- Safety Standard: UL8750
- Dielectric Strength (Hi-Pot): I/P-O/P (1.88KVAC) / I/P-Case (1.88KVAC)
- Insulation Resistance: 100MΩ/500VDC/77°F/70%RH
- Grounding Resistance: ≤ 0.5Ω
- EMC: Design Reference FCC Part 15 B


Others:

- MTBF: 50Khrs. MIL-HDBK-217F(77°F)
- Dimmer Compatibility: MLV/Triac Dimmer LUTRON(DVLV-600P, DVCL-153P.PD-5NE)
- Minimum LLoad available for Dimming (Use DVCL-153P): 5%
- Weight: 1.5

Wiring Diagram:

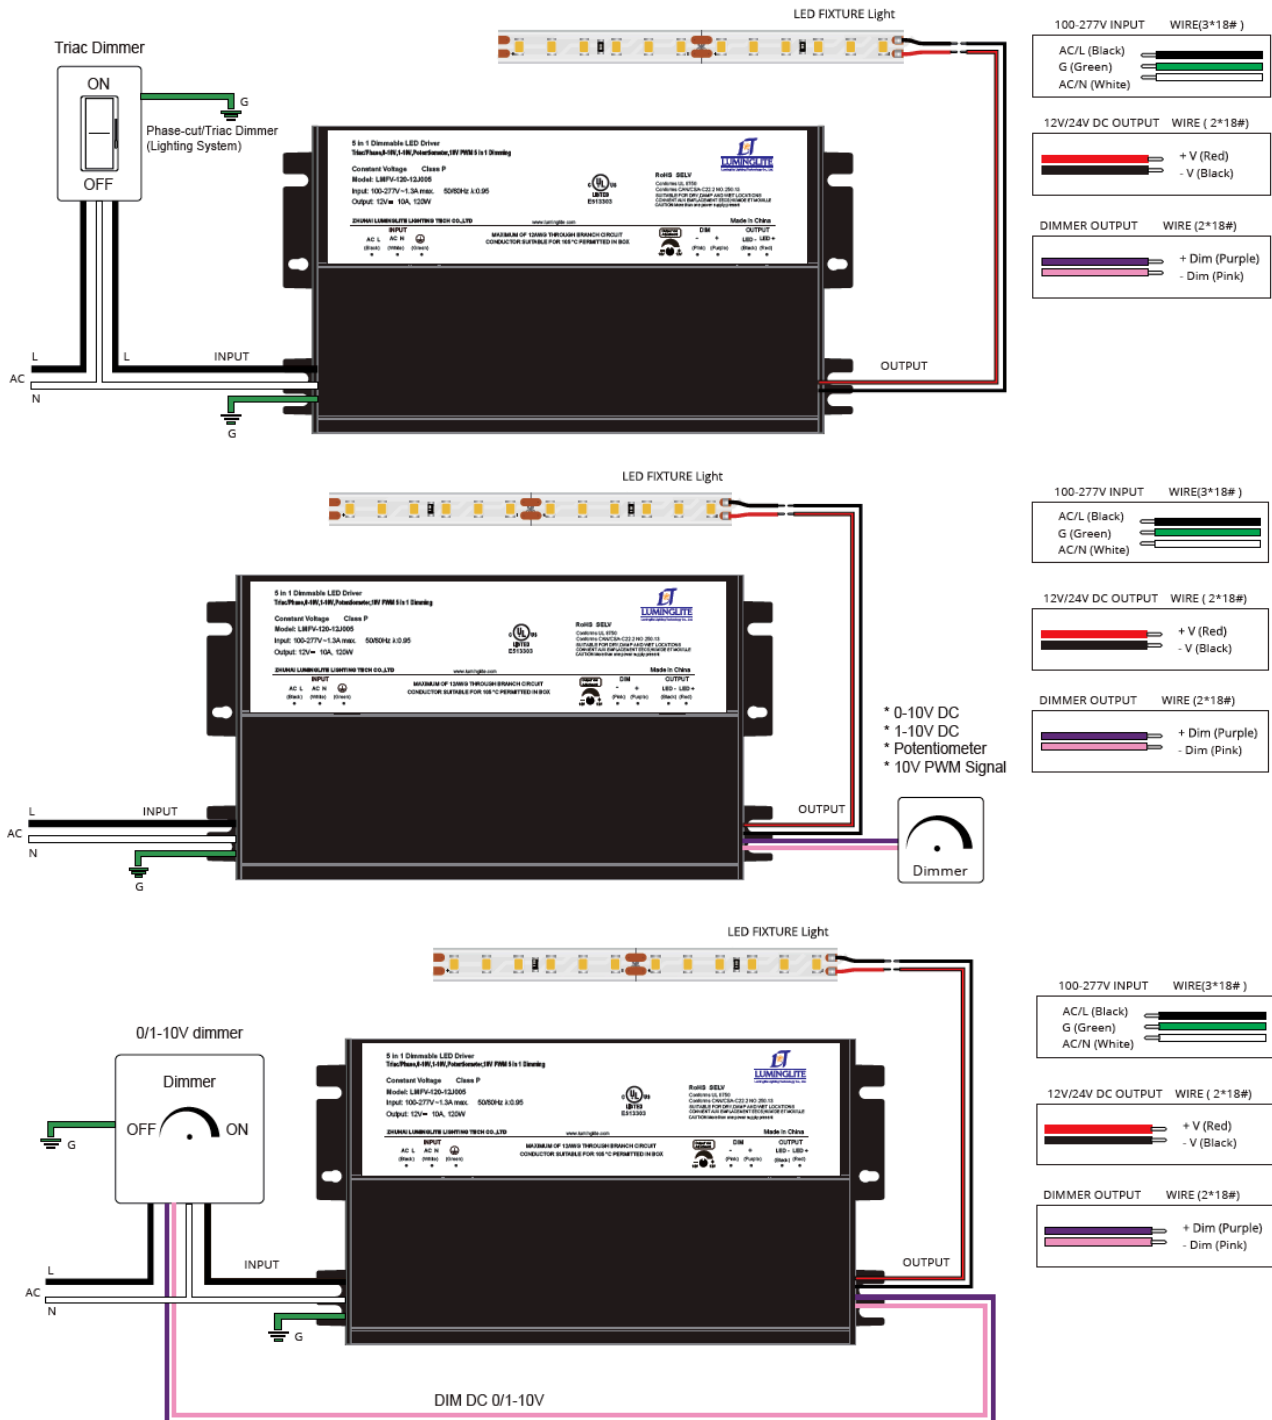

Derating Curve:

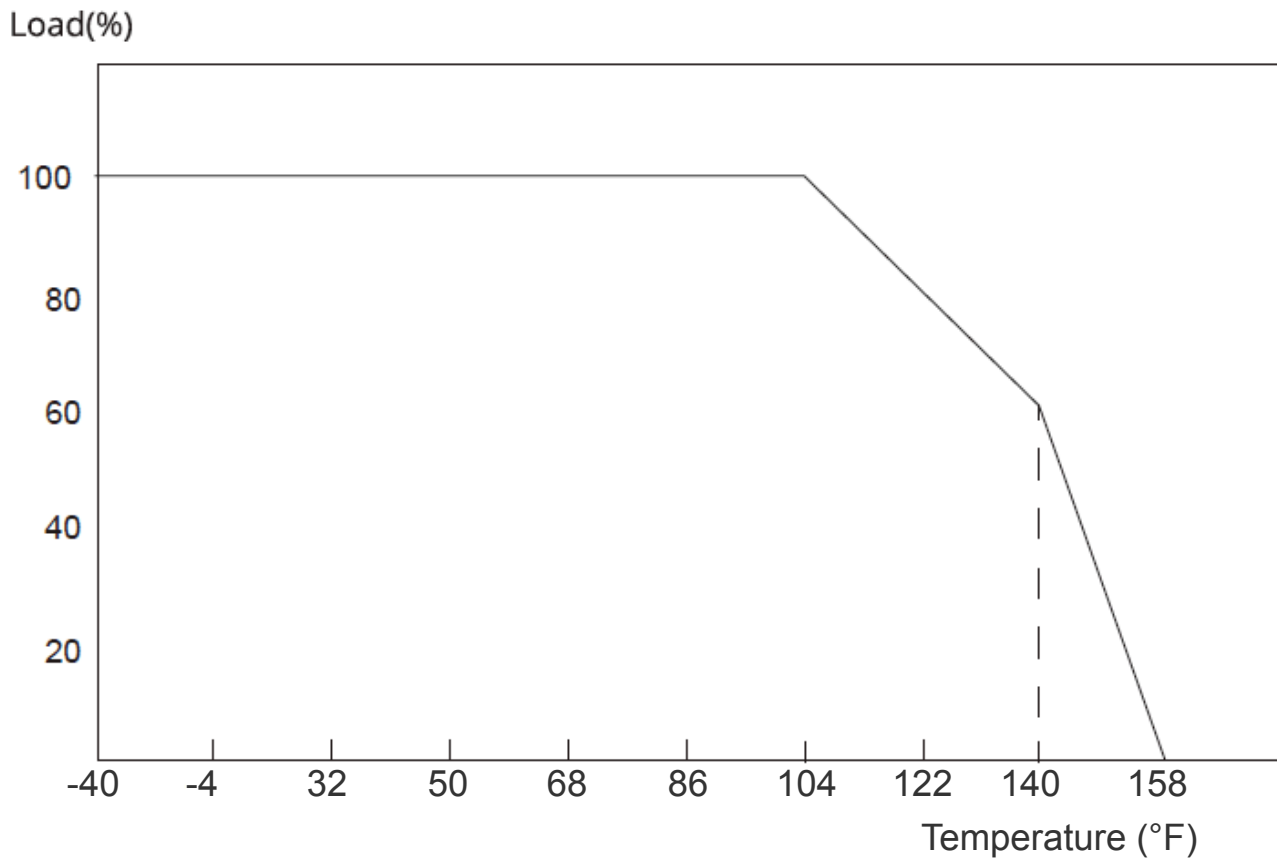

Attentions:

- Please make sure that the ground wire is properly grounded and make sure it does not come into contact with the neutral wire.
- Please install the power supply in a well-ventilated place to ensure the environment temperature is appropriate.
- Refrain from overloading the power supply with multiple appliances.
- Please do not touch the metal shell surface to avoid high-temperature scald.
- Do not install in the minefield or high-pressure area.
- Please don't try to repair it privately. Please get in touch with the supplier if you have any questions.

Tips:

- To be installed by a certified electrician. Please read and follow the instructions carefully before installing. Ensure all contact points are connected firmly.
- Please pay attention to the environment and conduct regular checks and maintenance to eliminate safety risks.

