

# LF12 SERIES

OUTDOOR LIGHTING

**WESTGATE**  
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

LF12-G2-7W-MCT5-BK  
LF12-G2-7W-MCT5-ORB  
2ND GEN. 12-VOLT AC/DC LED GARDEN LIGHT

**MCT5** Multi Color Temperature (Selectable)

Customer Name: \_\_\_\_\_



Project Name: \_\_\_\_\_

Note: \_\_\_\_\_

Type: \_\_\_\_\_



Selection:

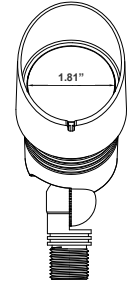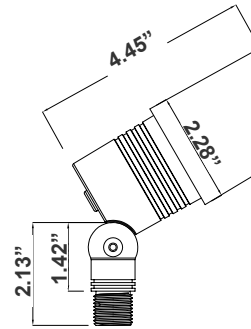

2.13"(H) x 4.45"(W) x 1.81"(D)

The fixture has classic traditional appearance, professional light distribution design, 90-degree beam angle, ideal for park landscaping, garden, architectural landscape lighting, suitable for wet locations

## Features

- Die-cast Aluminum Housing with Powder Coat Finish (Black)
- 1/2" Threaded Knuckle Stem
- 7-Year Warranty
- Lens Type: Plaid Tempered Glass + Aluminum Reflectors

## Technical Specifications

### Electrical:

- Voltage: 12V AC/DC
- Power Factor: >0.9
- Wattage: 7W
- Input current: 1A Max
- Efficacy: 57 LPW

### Mechanical:

- Die-cast Aluminum Housing with Powder Coat Finish
- Rotatable Shroud with Set Screw
- Solid State Lighting Technology for Long Life, No Maintenance Needed and High-Efficiency
- High Conductive Aluminum LED Board
- 8-1/2" PC Spike Included
- 1/2" Threaded Knuckle Stem
- IP65, Suitable for Wet Locations
- Operating Temperature: -4°F to 104°F
- 7-Year Warranty

### Lighting:

- Dimmable: Non Dimmable
- Total lumens: 400LM
- Color Temperatures: 2700K/3000K/3500K/4000K/5000K
- Color Rendering Index: CRI ≥ 80
- Beam Angle: 36°
- Lifespan: 70,000 Hrs.

### Applications:

- The fixture has classic traditional appearance, professional light distribution design, 90-degree beam angle, ideal for park landscaping, garden, architectural landscape lighting, suitable for wet locations





Phone: (877) 805-2252 | Fax: (877) 805-2252  
www.westgatemfg.com




WG-07/072022

## Photometrics: LF12-G2-7W-MCT5

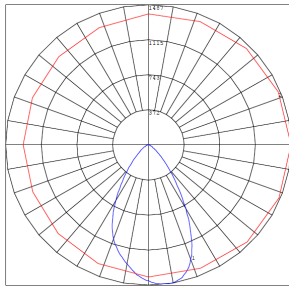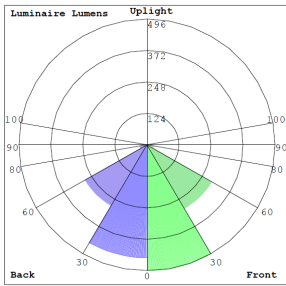

BUG Rating: B1-U0-G0

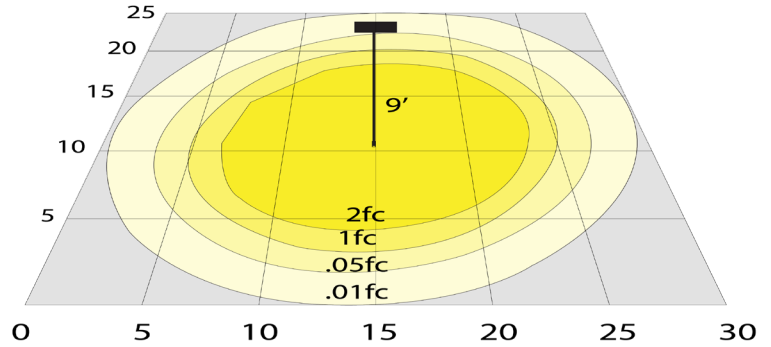

6W 3000K, Area 25'x 30' Mounting Height: 9'

## Performance Table: LF12-G2-7W-MCT5

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LF12-G2-7W-MCT5-BK LF12-G2-7W-MCT5-ORB	6W	12V	400LM	2700K 3000K 3500K 4000K 5000K	B1-U0-G0	57

## Sample Ordering

Model Gen Watt Color Temp. Finish

LF12 - G2 - 6W - MCT5 -

BK = Black  
ORB = Oil-rubbed  
bronze

### Accessories:

Blank = No Option For Accessories

A-41-BR = 1/2" NPT Hub, Cast Aluminum, Bronze Powder Coat Finish

LSWN1 = Bag of 24, Waterproof Wire Connectors, For Up to Two 14-2 + One 16-2 Cables

LSWN2 = Box of 24, Waterproof Wire Connectors, For Up to Three 12-2 Cables

LSWN2-100 = Jar of 100, Waterproof Wire Connectors, For Up to Three 12-2 Cables

A-41-S = Tree Mounting Base

LG-SMB-BZ = 12V Brass Landscape Tree or Surface Bracket, Antique Bronze Finish

BC-13 = 13" Bungee Cords with Hooks

BC-18 = 18" Bungee Cords with Hooks

BC-24 = 24" Bungee Cords with Hooks

BC-32 = 32" Bungee Cords with Hooks

### ACCESSORIES:



**A-41-BR**  
1/2" NPT hub, Cast aluminum, Bronze Powder coat finish



**LSWN1**  
Bag of 24, Waterproof wire connectors, for up to two 14-2 + one 16-2 cables



**LSWN2**  
Box of 24, Waterproof wire connectors, for up to three 12-2 cables



**LSWN2-100**  
Jar of 100, Waterproof wire connectors, for up to three 12-2 cables



**A-41-S**  
Tree mounting base



**LG-SMB-BZ**  
12V brass landscape tree or surface bracket, antique bronze finish



**BC-13/18/24/32**  
13"/18"/24"/32" Bungee cords with hooks

