




2" wall mount bracket (ACC-WM2)
and 4" square pole adaptor with
2" tendon (PSS4STZ)



Slip fitter adjust 90-degrees
above and below center

DIMENSIONS:

12-1/2" (W) x 17" (H) x 2-3/4" (D) x 12-1/4" (SF)

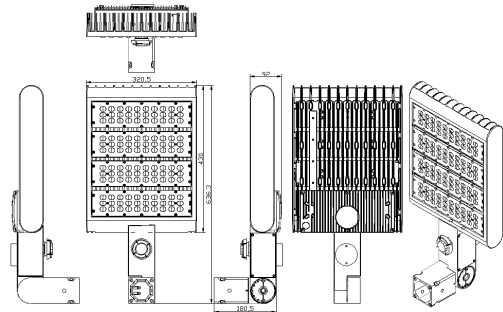

Other Options (Field Installed):

Order fixture:

LF3-220CW

LF3-220WW



Order Mounting:

LF3-SF

Slip fitter



LF3-YOK

Yoke

Includes strain relief connector



LF3-EXTARM

Extension arm

(4" wide to fit 4" pole)



LF3-STR

Street light arm

(6" long to fit 2"-2-1/2" pipe)

Includes strain relief connector

Example: LF3 (series) - 220 (wattage) - CW (color temp) = LF3-220CW + LF3-EXTARM (mounting)

LF3-300CW-SF LF3-300WW-SF

LED Flood Lights 3 Series with Slip Fitter

Ideal for general site lighting, alleys, loading docks, doorways, pathway, parking areas. Replace existing HID flood lights/wall packs Great for use with motion sensors or other instant on/off controls. Solid state lighting technology for long life, low maintenance and high efficiency.

ELECTRICAL SPECIFICATIONS:

- Voltage: 100-277VAC 50/60Hz
- Wattage: 300W
- Input current: 3.5A Max
- Other wattages: 80W, 100W, 150W, 220W
- Power factor: PF>0.90
- Output voltage: 36-60VDC
- Output current: 8.9A
- Driver efficiency: 88%

HOUSING SPECIFICATIONS:

- Die-cast aluminum with powder coat finish (Dark Bronze)
- Operating temperature: -30 — +40
- Lifespan: 50000Hrs.
- IP rating: IP65, Wet Locations
- 100% dip-tested under load
- Main Structure: aluminum + Optical lens
- Storage temperature humidity: -40 — +80 , 10—90% RH

CERTIFICATIONS: UL, DLC



LIGHTING SPECIFICATIONS:

- Dimmable
- LED type/brand: SMD 3030/ Lumileds LEDs
- Total lumens: 25684lm and 21578lm
- Color temperature: 3000K / 4000K / 5000K / 5700K
- Color rendering index: >80
- Beam angle: 120x90°
- Luminance: 30850Lm (DLC)
- Luminous Efficiency: Lm/W (DLC)
- LED quantity: 320 PCS
- LED efficacy: 120 Lm/W

SAFETY & EMC:

- Safety norms: UL1598, UL8750, EN60598, EN61347-2-13, EN62031, EN62471
- Withstand voltage: I/P-FG: 2121VDC
- Grounding resistance: ≤0.5Ω, 0K
- Electromagnetic compatibility: EN55015, EN61000-2-3, EN61000-3-3, EN61547
- Gross weight: YK 26.5lbs TR 25.7lbs SF 28.2lbs MA 26lbs
- Quantity / Carton: 1pc

WARRANTY: 7 years



JOB NAME: _____

DATE: _____

TYPE: _____

LF3-300CW-SF
LF3-300WW-SF


LED Flood Lights 3 Series with Slip Fitter



MODEL	WATTS	VOLTAGE	LUMENS	COLOR TEMP
LF3-300CW-SF	3000W	100~277V AC	34017 LM	5000K
LF3-300WW-SF	3000W	100~277V AC	30857 LM	3000K

PHOTOMETRICS:

Spectral Power Distribution & Chromaticity Diagram

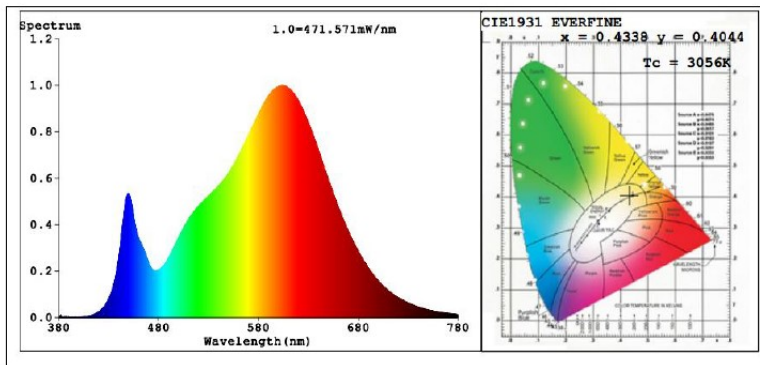


Illuminance Plots

Illuminance at a Distance


	Center Beam fc	Beam Width	
17.0ft	33.5 fc	45.9 ft	72.9 ft
34.0ft	8.4 fc	91.7 ft	145.7 ft
51.0ft	3.7 fc	137.6 ft	218.6 ft
68.0ft	2.1 fc	183.4 ft	291.4 ft
85.0ft	1.3 fc	229.3 ft	364.3 ft
102.0ft	0.9 fc	275.1 ft	437.1 ft

■ Vert. Spread: 106.9°
■ Horiz. Spread: 130.0°

Photometric Data

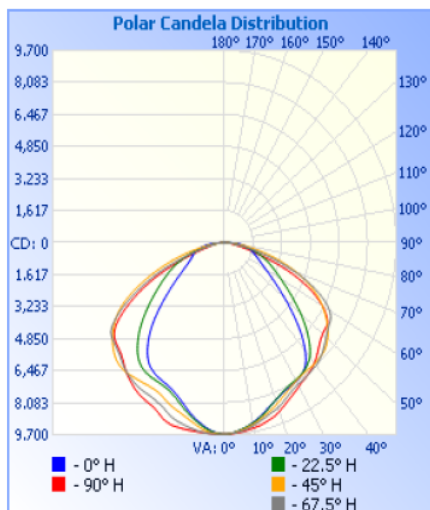

ISOCANDELA DIAGRAM

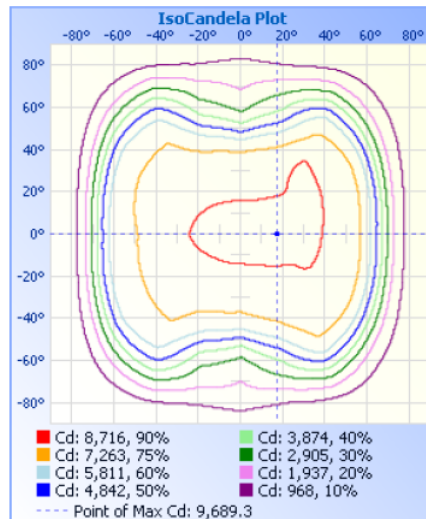

ISOLUX DIAGRAM

