

LF3 SERIES

Outdoor Lighting

WESTGATE
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

LF3-30WW-KN
LF3-30NW-KN
LF3-30CW-KN



Selection:




Ideal for general site lighting, alleys, loading docks, doorways, pathways, parking areas. Replace existing HID flood lights/wall packs. Great for use with motion sensors or another instant on/off controls. Solid-state lighting technology for long life, low maintenance, and high efficiency.

Customer Name: _____

Project Name: _____

Note: _____

Type: _____

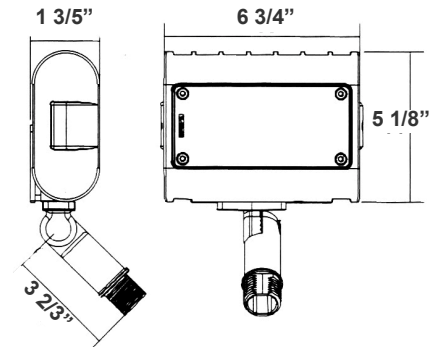

6-3/4" (W) x 5-1/8" (H) x 1-3/5" (D) x 3-2/3" (K)

Features

- DLC Premium & LED High-Lumen Floor lights
- LF3 Flood Light Series With 1/2" Knuckle
- 70,000 Hours Rated Life
- 7-Year Warranty
- Optic Lens Type: II

Technical Specifications

Electrical:

- Voltage: 100-277VAC 50/60Hz
- Wattage: 30W
- Output voltage: 36-60VDC
- Power factor: >0.9
- Output Current: 0.25A
- Driver Efficiency: 88%

Lighting:

- LED: Lumileds Lixeeon 3030 high flux LED
- Cord type: 13" #18 AWG stranded wires
- Total lumens: 3600LM
- Color temperature: 3000K/ 4000K/ 5000K
- Color rendering index: CRI ≥ 82
- Beam Angle: 120°x90°

Mechanical:

- Die-cast Aluminum Housing with Powder Coat Finish (Dark Bronze and White Finish)
- Solid State Lighting technology for long life, no Maintenance needed and High-Efficiency
- High Conductive Aluminum LED Board
- IP Rating: IP65
- Operating Temperature: -40°F to 104°F
- Suitable for Wet Locations

Applications:

- Ideal for general site lighting, alleys, loading docks, doorway, pathway and parking areas.
- Replace existing HID flood lights/ wall packs
- Great for use with motion sensors or other instant on/off controls

Other Models:

- 15W | 1700LM | LF3-15WW-KN
- 15W | 1700LM | LF3-15NW-KN
- 15W | 1700LM | LF3-15CW-KN
- 50W | 6100LM | LF3-50WW-KN
- 50W | 6100LM | LF3-50NW-KN
- 50W | 6100LM | LF3-50CW-KN





Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com | www.westgatecontrols.co




WG-ZS-Z6-Z2

Photometrics: LF3-30W

TYPE II



BUD Rating: B1-U1-G1

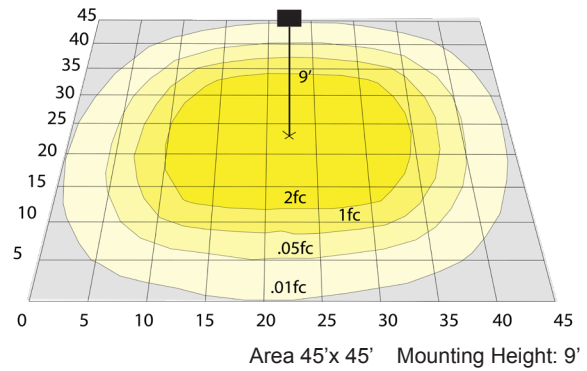

Other Views:



Front View



Side View



Back View

Performance Table: LF3-30W

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LF3-30WW	30W	120~277V	3600LM	3000K	B1-U1-G1	120
LF3-30NW	30W	120~277V	3600LM	4000K	B1-U1-G1	120
LF3-30CW	30W	120~277V	3600LM	5000K	B1-U1-G1	120

Sample Ordering

Model	Wattage	Color Temp.
LF3	30	KN

WW = 3000K
 NW = 4000K
 CW = 5000K

Accessories Options

Blank = No Option For Accessories

WRC-3-BRZ = Weatherproof cover with three(3) 1/2" hubs

LA-90-BZ = Fixture mounting 90° elbow Attachment

LF3-SH1 = Shroud for LF3 30W Reversible

LF3-SH1FG = Full-Glare Shroud for LF3 30W

Example:

- 1.LF3-30WW-KN (For LF3 30W 3000K fixture 120-277V)
- 2.LF3-30WW-KN (For LF3 30W 3000K fixture 120-277V)
- LF3-SH1 (Shroud for LF3 30W)

ACCESSORIES AND MOUNTING OPTIONS

