

JOB NAME: _____


DATE: _____

TYPE: _____



DIMENSIONS:

14-1/8"(H) x 12-5/8"(W) x 3-3/8"(D)

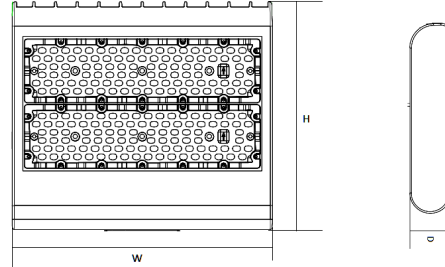

LF3-HL-150W-50K-TR LF3-HL-150W-30K-TR

LED HIGH LUMEN LF3 FLOOD LIGHTS

Ideal for general site lighting, alleys, loading docks, doorway, pathway, and parking areas.

ELECTRICAL SPECIFICATIONS:

- Voltage: 120~277V
- Wattage: 150W
- Efficacy: 135LM/W

HOUSING SPECIFICATIONS:

- Die-cast Aluminum housing with powder coat finish (Dark Bronze)
- Operating temperature: -40°F to 104°F
- Lifespan: 70,000 hr.
- IP Rating: IP65

CERTIFICATIONS: UL, DLC



MODEL	WATTS	VOLTAGE	LUMENS	COLOR TEMP
LF3-HL-150W-50K-TR	150W	120~277V	20250LM	5000K
LF3-HL-150W-30K-TR	150W	120~277V	20250LM	3000K

LIGHTING SPECIFICATIONS:

- Dimmable: 0~10V Dimming
- Lens: TYPE III TIR optic Lens
- LED: Philips Lumileds Luxeon 3030 High flux LED
- Solid state lighting technology for long life, no maintenance needed and high-efficiency
- Cord type: 6' SJTW 18/3 AWG cable
- Total lumens: 20250LM
- Color temperature: 5000K/3000K
- Color rendering index: 82~84
- Beam Angle: 120°x90°

WARRANTY: 7 years



LF3-HL-150W-50K-TR
LF3-HL-150W-30K-TR

LED HIGH LUMEN LF3 FLOOD LIGHTS

PHOTOMETRIC CHARTS:

MODEL	WATTS	VOLTAGE	LUMENS	COLOR TEMP
LF3-HL-150W-50K-TR	150W	120~277V	20250LM	5000K
LF3-HL-150W-30K-TR	150W	120~277V	20250LM	3000K

