



LF4-15W-50K-KN

LF4-15W-30K-KN

LF4 ARCHITECTURAL SERIES LED FLOOD LIGHT WITH ADJUSTABLE KNUCKLE

Ideal for general site lighting, alleys, loading docks, doorway, pathway and parking areas. Great for use with motion sensors and other instant on/off controls.

ELECTRICAL SPECIFICATIONS:

- Voltage: 120-277VAC 50/60Hz
- Wattage: 15W
- Input current: 0.38A Max
- Other wattages: 12W, 50W
- Power factor: >0.95
- Efficacy: 126LM/W

HOUSING SPECIFICATIONS:


- Die-cast aluminum with powder coat finish (Dark Bronze)
- Operating temperature: -40°F ~ 104°F
- Lifespan: 70000 Hrs.
- IP rating: IP65, Wet Locations
- High light transmittance, anti-UV & fire resistant PC lens

CERTIFICATIONS: UL



DIMENSIONS:

4-3/4"(H) x 5-5/8"(W) x 2-5/8"(D)

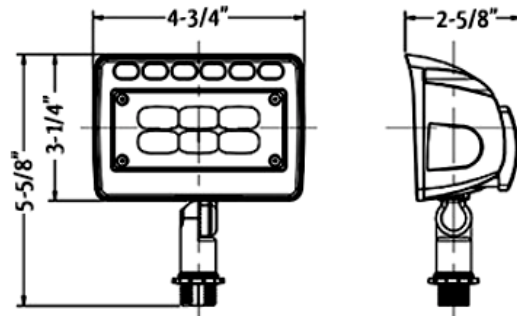

MODEL	WATTS	VOLTAGE	LUMENS	COLOR TEMP
LF4-15W-50K-KN	15W	120~277V AC	1900LM	5000K
LF4-15W-30K-KN	15W	120~277V AC	1900LM	3000K

OPTIONAL ACCESSORY:

MODEL	DESCRIPTION
LF4-SH1	SHROUD FOR LF4 SERIES

LIGHTING SPECIFICATIONS:

- LED type/brand: Philips Lumileds LEDs / SMD 3030
- Total lumens: 1900LM
- Color temperature: 3000K/5000K
- Color rendering index: >82
- Beam angle: 90° x 120°

WARRANTY: 5 years

