


DIMENSIONS:

21.7"(H) x 14.2"(W) x 4.7"(D)

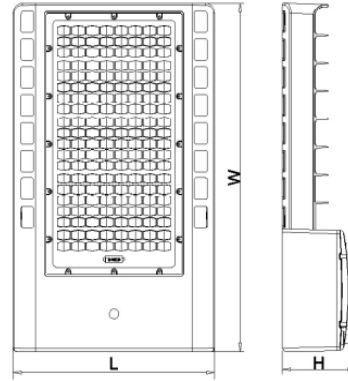

LF5-380CW-YK

LF5 SERIES WITH MOUNTING OPTIONS

Ideal for general site lighting, alleys, loading docks, doorway, pathway and parking areas. Great for use with motion sensors or other instant on/off controls.

ELECTRICAL SPECIFICATIONS:

- Voltage: 120~277 VAC/50~60 Hz
- Wattage: 380 W
- Power factor: >0.9~0.97
- Efficacy: UP TO 110 LM/W

HOUSING SPECIFICATIONS:


- Die-Cast Aluminum housing with Powder Coat Finish (Dark Bronze)
- Mounting Yoke provided in the package
- Aluminum LED board
- Cord type: 6" SJTW 18/3 AWG cable
- Operating temperature: -40°F to 104°F
- Lifespan: 70,000 hr.
- IP Rating: IP65

CERTIFICATIONS: UL



MODEL	WATTS	VOLTAGE	LUMENS	COLOR TEMP
LF5-380CW-YK	380W	120~277V AC	46000 LM	5000K

MOUNTING OPTIONS:

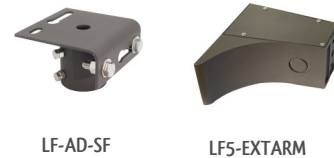

MODEL	DESCRIPTION
LF-AD-SF	Slip Fitter Adapter
LF5-EXTARM	Extension Arm Adapter for Wall or Pole mounting

LIGHTING SPECIFICATIONS:

- Dimming: 0~10V dimmable
- LED: TIR optic lens — TYPE III (TYPE II & IV by request)
- Total lumens: 46000 LM
- Color temperature: 5000K
- Color rendering index: 82~84

WARRANTY: 7 years





LF5-380CW-YK


LF5 SERIES WITH MOUNTING OPTIONS

MODEL	WATTS	VOLTAGE	LUMENS	COLOR TEMP
LF5-380CW-YK	380W	120~277V AC	46000 LM	5000K

PHOTOMETRICS:

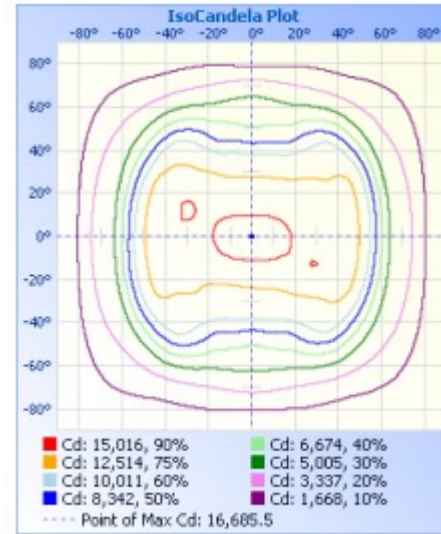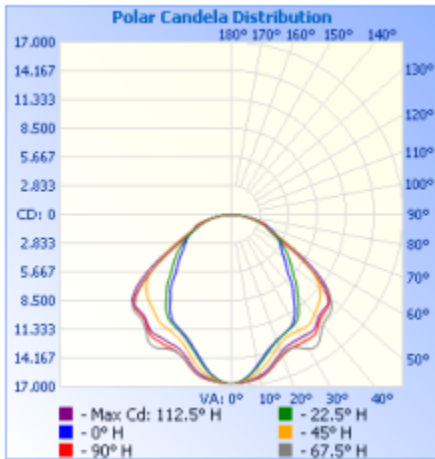

SPECTRAL POWER DISTRIBUTION:

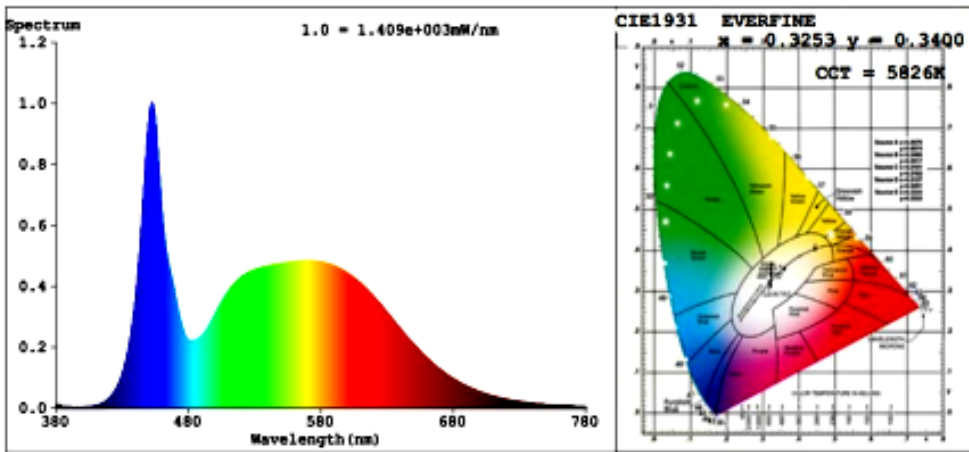

Zonal Lumen Summary		
Zone	Lumens	% Luminaire
0-30	11,912.8	26.7%
0-40	19,859.2	44.5%
0-60	36,058.7	80.8%
60-90	8,576.2	19.2%
70-100	3,654.3	8.2%
90-120	0	0%
0-90	44,634.9	100%
90-180	0	0%
0-180	44,634.9	100%

