LFE SERIES Outdoor Lighting

WESTGATE
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

LFE-15W-MCT-KN-P

COMPACT FLOOD LIGHT WITH PHOTOCELL

MCT Multi Color Temperature (Selectable)


Customer Name:

Project Name:

Note: | Type:



Selection:

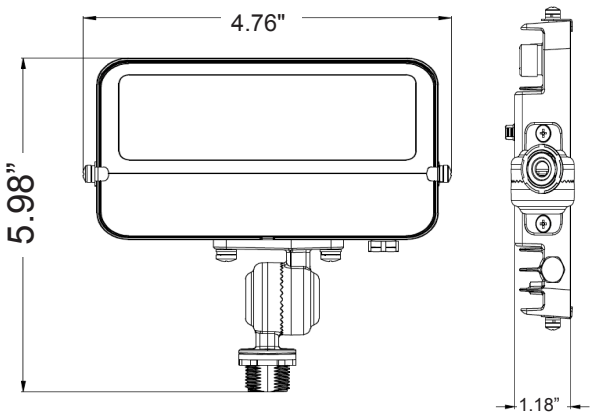

5.98"(H) x 4.76"(W) x 1.18"(D)

Ideal for general site lighting, alleys, loading docks, doorways, pathway, parking areas. Replace existing HID flood lights/wall packs. Great for use with motion sensors or other instant on/ off controls. Solid state lighting technology for long life, low maintenance and high efficiency.

Features

- 90° Adjustable 1/2" Knuckle Mount
- MCT: Multi Color Temperature (Switch On The Back of Fixture With Silicon Cover)
- 7-Year Warranty
- 70,000 hours rated life
- Low Maintenance Needed and High Efficiency

Technical Specifications

Electrical:

- Voltage: 120 VAC 50/60Hz
- Wattage: 15W
- Power Factor: >0.9
- Efficacy: 106 LPW
- THD: <25%

Mechanical:

- Die-Cast Aluminum Housing With Powder Coat Finish (Dark Bronze Finish)
- Solid State Lighting Technology For Long Life, Low Maintenance Needed and High-Efficiency
- High Conductive Aluminum LED Board
- Integrated DC Button Photocell Included
- IP Rating: IP65
- Operating Temperature: -40°F to 104°F
- Suitable for Wet Locations

Lighting:

- Cord type: 18" SJTW 18/3 AWG cable
- MCT: Multi Color Temperature (Switch On The Back of Fixture With Silicon Cover)
- Total lumens: 1600LM
- Color temperature: 3000K/ 4000K/ 5000K
- Color rendering index: CRI > 70
- Beam Angle:120° x 90°

Applications:

- Ideal for general site lighting, alleys, loading docks, doorway, pathway and parking areas.
- Replace existing HID flood lights/ wall packs
- Great for use with motion sensors or other instant on/off controls

Other Models:


- 30W | 3150LM | LFE-30W-MCT-KN-P
- 50W | 5250LM | LFE-50W-MCT-KN-P

UL LISTED · DLC · WET LOCATION · IP65 · LUMILEDS · 7 YEAR WARRANTY


Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com | www.westgatecontrols.co

WG-ZA-Y9-2Z

Photometrics: LFE-15W-MCT-KN

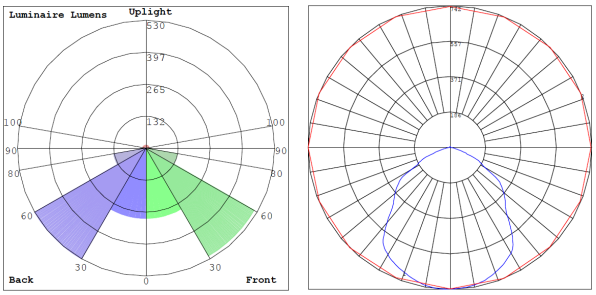

BUD Rating: B1-U2-G0

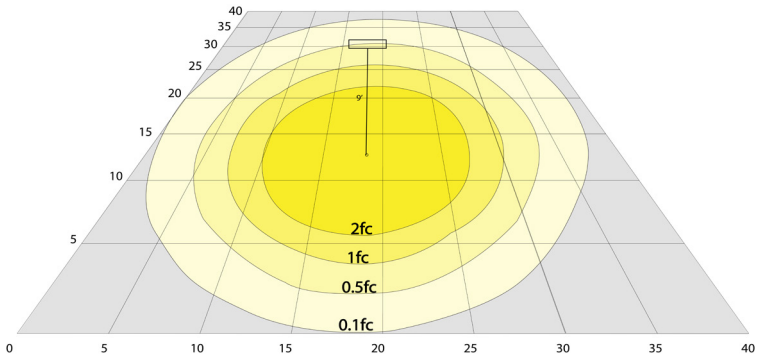

Area 40'x 40' Mounting Height: 9'

Other Views:



Side View



Front View



Back View

Performance Table: LFE-15W-MCT-KN

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LFE-15W-MCT-KN	15W	120V	1600LM	3000K 4000K 5000K	B1-U2-G0	106

Sample Ordering

Model **Wattage** **Color Temp.**

LFE - 15W - MCT - KN

Accessories Options

Blank = No Option For Accessories
WRC-3-BRZ =Weatherproof cover with three(3) 1/2" hubs

ACCESSORIES AND MOUNTING OPTIONS



WRC-3-BRZ
Weatherproof cover with Three
(3) 1/2" hubs



B-41



Mounts to landscape post or any 1/2" hub



Fully adjustable 1/2" threaded knuckle for aiming versatility

WESTGATE

Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com |