

# LFE SERIES Outdoor Lighting

LFE-15W-30K-TR  
LFE-15W-40K-TR  
LFE-15W-50K-TR  
COMPACT FLOOD LIGHT


**WESTGATE**  
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

Customer Name: \_\_\_\_\_

Project Name: \_\_\_\_\_

Note: \_\_\_\_\_


Type: \_\_\_\_\_

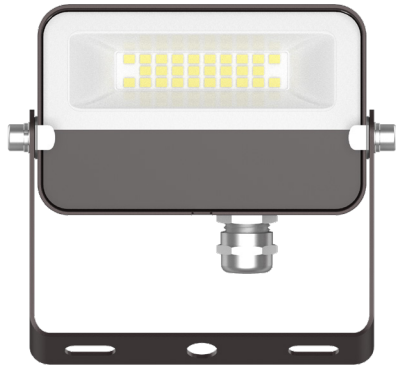

Selection:



Ideal for general site lighting, alleys, loading docks, doorways, pathway, parking areas. Replace existing HID flood lights/wall packs. Great for use with motion sensors or other instant on/off controls. Solid state lighting technology for long life, low maintenance and high efficiency.

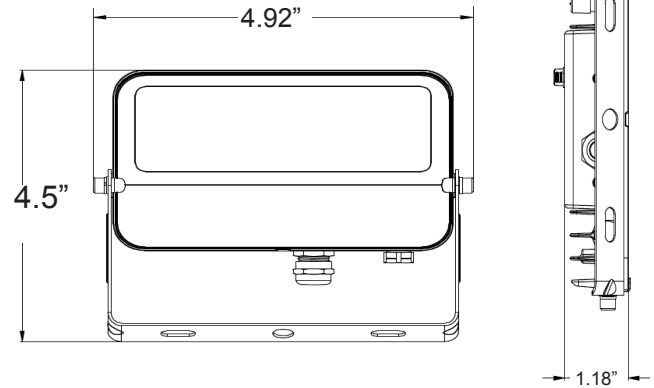

4.5"(H) x 4.92"(W) x 1.18"(D)

## Features

- 270° Adjustable Yoke Mount
- 70,000 hours rated life
- 7-Year Warranty
- Low Maintenance Needed and High-Efficiency

## Technical Specifications

### Electrical:

- Voltage: 120 VAC 50/60Hz
- Wattage: 15W
- Power Factor: >0.9
- Efficacy: 106 LPW
- THD: <25%

### Mechanical:

- Die-Cast Aluminum Housing With Powder Coat Finish (Dark Bronze Finish)
- Solid State Lighting Technology For Long Life, No Maintenance Needed and High-Efficiency
- High Conductive Aluminum LED Board
- IP Rating: IP65
- Operating Temperature: -40°F to 104°F
- Suitable for Wet Locations

### Lighting:

- Cord type: 18" SJTW 18/3 AWG cable
- Total lumens: 1600LM
- Color temperature: 3000K/ 4000K/ 5000K
- Color rendering index: CRI > 70
- Beam Angle: 120° x 90°

### Applications:

- Ideal for general site lighting, alleys, loading docks, doorway, pathway and parking areas.
- Replace existing HID flood lights/ wall packs
- Great for use with motion sensors or other instant on/off controls

### Other Models:



- 15W | 1600LM | LFE-15W-30K-KN
- 15W | 1600LM | LFE-15W-40K-KN
- 15W | 1600LM | LFE-15W-50K-KN




Phone: (877) 805-2252 | Fax: (877) 805-2252  
www.westgatemfg.com |



## Photometrics: LFE-15W-TR

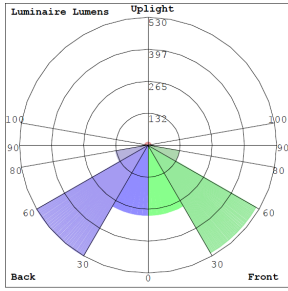

BUD Rating: B1-U2-G0

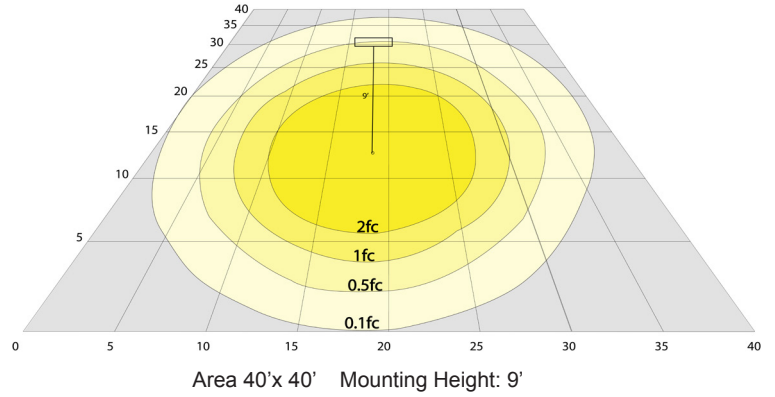

Area 40'x 40' Mounting Height: 9'


## Other Views:



Side View



Front View



Back View

## Performance Table: LFE-15W-TR

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LFE-15W-30K-TR	15W	120V	1600LM	3000K	B1-U2-G0	106
LFE-15W-40K-TR	15W	120V	1600LM	4000K	B1-U2-G0	106
LFE-15W-50K-TR	15W	120V	1600LM	5000K	B1-U2-G0	106

## Sample Ordering

Model Wattage Color Temp.

LFE - 15W -  - TR  
 3000K  
 4000K  
 5000K

## Example:

1. LFE-15W-30K-TR

(For LFE 15W 3000K fixture 120V)

