

# LFX-MD SERIES Outdoor Lighting

LFX-MD-15-50W-30K-KN

LFX-MD-15-50W-40K-KN

LFX-MD-15-50W-50K-KN

**MP** Multi Power/Wattage (Selectable)

**WESTGATE**  
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!




Customer Name: \_\_\_\_\_

Project Name: \_\_\_\_\_

Note: \_\_\_\_\_

Type: \_\_\_\_\_

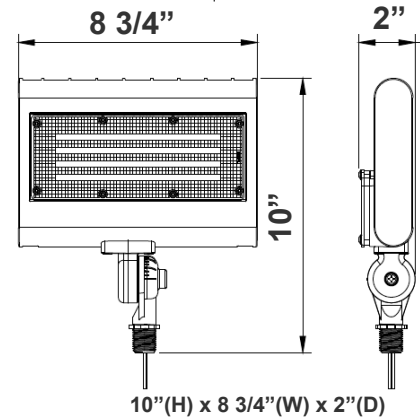

Ideal for general site lighting, alleys, loading docks, doorway, pathway, and parking areas.

## Features

- DLC Premium & LED High-Lumen Flood lights
- Solid State Lighting Technology for Long Life
- No Maintenance Needed and High-Efficiency
- 70,000 Hours Rated Life
- 7-Year Warranty
- Optic Lens Type: III
- Multi-Power: The Switch is on the Bottom of the Fixture

## Technical Specifications

### Electrical:

- Voltage: 120~277V AC/50~60 Hz
- Wattage: Selectable Wattages (15W/20W/30W/50W)
- Power Factor: >0.9
- Efficacy: 130 LPW

### Mechanical:

- Die-cast Aluminum Housing with Powder Coat Finish (Dark Bronze and White Finish)
- Solid State Lighting technology for long life, no Maintenance needed and High-Efficiency
- High Conductive Aluminum LED Board
- 90° Adjustable 1/2" Knuckle Mount
- IP Rating: IP65
- Operating Temperature: -40°F to 104°F
- Suitable for Wet Locations

### Lighting:

- Dimming: 0~10V Dimmable
- Optic Lens Type: III
- Cord type: 13" #18 AWG stranded wires
- Total Lumens: 6500LM Max.
- Multi-Power - The switch is on the bottom of the fixture
- Color Temperature: 3000K/4000K/5000K
- Color Rendering Index: ≥ 82
- Beam Angle: 120°X 90°

### Applications:

- Ideal for general site lighting, alleys, loading docks, doorway, pathway and parking areas.
- Replace existing HID flood lights/ wall packs

### Other Models:



- 15W | 1950LM | LFX-XS-15W-30K-KN
- 15W | 1950LM | LFX-XS-15W-40K-KN
- 15W | 1950LM | LFX-XS-15W-50K-KN
- 30W | 3900LM | LFX-SM-10-30W-30K-KN
- 30W | 3900LM | LFX-SM-10-30W-40K-KN
- 30W | 3900LM | LFX-SM-10-30W-50K-KN




Phone: (877) 805-2252 | Fax: (877) 805-2252  
www.westgatemfg.com |



**Photometrics:** LFX-MD-15-50W-KN

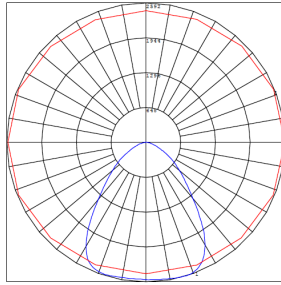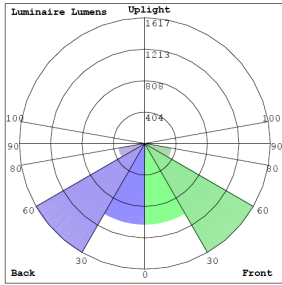

BUG Rating: B3-U0-G1

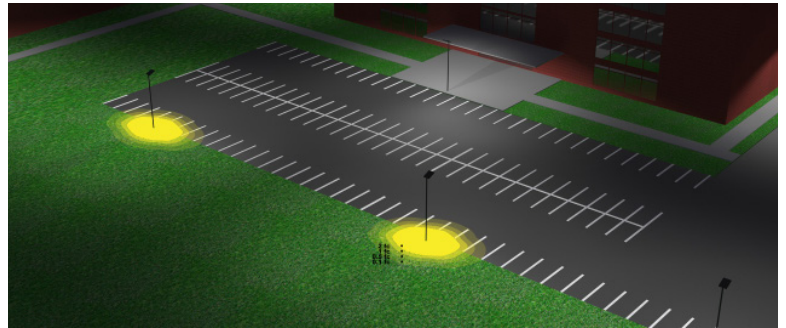

Area 45'x 55' Mounting Height: 20'

**Other Views:**



Side View



Front View



Back View

**Performance Table:** LFX-MD-15-50W-KN

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LFX-MD-15-50W-30K-KN LFX-MD-15-50W-40K-KN LFX-MD-15-50W-50K-KN	15W	120~277V	1950LM	3000K 4000K 5000K	B3-U0-G1	130
	20W		2600LM			
	30W		3900LM			
	50W		6500LM			



# Sample Ordering

Model	Size	Min.Wattage	Max.Wattage	Color Temp.	Mount
LFX	MD	15	50W		KN

30K = 3000K  
40K = 4000K  
50K = 5000K

## Accessories Options

Blank = No Option For Accessories  
**WRC-3-BRZ** = Weatherproof cover with three(3) 1/2" hubs  
**LF3-SH2** = Shroud for LF3 50W Reversible  
**LF3-SH2FG** = Full-Glare Shroud for LF3 50W

## ACCESSORIES AND MOUNTING OPTIONS



**WRC-3-BRZ**  
Weatherproof cover with Three (3) 1/2" hubs



**B-41**



Mounts to landscape post or any 1/2" hub



Fully adjustable 1/2" threaded knuckle for aiming versatility



**LF3-SH2**  
Shroud (Reversible)



**LF3-SH2FG**  
Full-Glare Shroud

### Color Options: Custom Color Available

Black Silver White **Dark Bronze** Green Red Yellow  
Default color



## Example:

1. LFX-MD-15-50W-30K-KN
2. LFX-MD-15-50W-30K-KN  
WRC-3-BRZ

(For LFX 15-50W 3000K fixture 120V-277V)

(For LFX 15-50W 3000K fixture 120V-277V)  
(Weatherproof cover with three(3) 1/2" hubs)

