

LFX-MD SERIES Outdoor Lighting

LFX-MD-15-50W-MCTP-KN-BK

MCTP Multi Color Temperature & Multi Power/Wattage (Selectable)

WESTGATE
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!




Ideal for general site lighting, alleys, loading docks, doorway, pathway, and parking areas.

Customer Name: _____

Project Name: _____

Note: _____

Type: _____

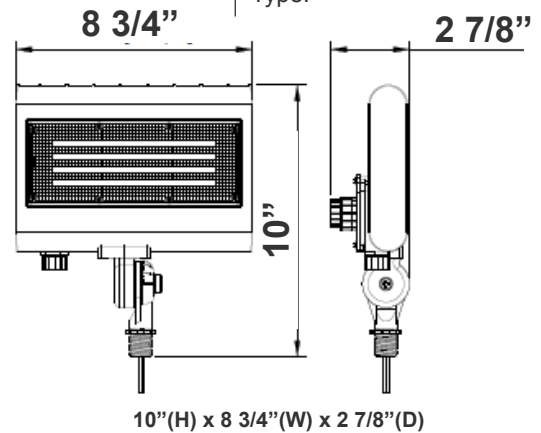

Features

- DLC Premium & LED High-Lumen Floor lights
- Solid State Lighting Technology for Long Life
- No Maintenance Needed and High-Efficiency
- 70,000 Hours Rated Life
- 7-Year Warranty
- Optic Lens Type: III
- Multi-CCT Power - The Switch is on the Bottom of the Fixture

Technical Specifications

Electrical:

- Voltage: 120~277V AC/50~60 Hz
- Wattage: 15W/20W/30W/50W
- Power Factor: >0.9
- Efficacy: 130 LPW

Mechanical:

- Die-cast Aluminum Housing with Powder Coat Finish (Dark Bronze and White Finish)
- LED: Lumileds Luxeon 2835 High Flux LED
- Solid State Lighting technology for long life, no Maintenance needed and High-Efficiency
- High Conductive Aluminum LED Board
- 90° Adjustable 1/2" Knuckle Mount
- IP Rating: IP65
- Operating Temperature: -40°F to 104°F
- Suitable for Wet Locations

Lighting:

- Dimming: 0~10V Dimmable
- Optic Lens Type: III
- Cord type: 13" #18 AWG stranded wires
- Multi-CCT Power - The Switch is on the Bottom of the Fixture
- Color temperature: 3000K/4000K/5000K/5700K
- Total Lumens: 6500LM Max
- Multi CCT: Selectable Wattages & CCTs
- Color Rendering Index: ≥ 82
- Beam Angle: 120°X 90°

Applications:

- Ideal for general site lighting, alleys, loading docks, doorway, pathway and parking areas.
- Replace existing HID flood lights/ wall packs

Other Models:



- 50W | 6350LM | LFX-MD-15-50W-MCTP-KN • 50W | 6350LM | LFX-MD-15-50W-MCTP-KN-WH • 50W | 6350LM | LFX-MD-15-50W-MCTP-KN-SV




Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com |



Photometrics: LFX-MD-15-50W-MCTP-KN-BK

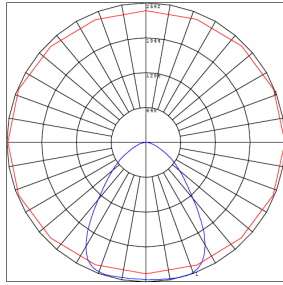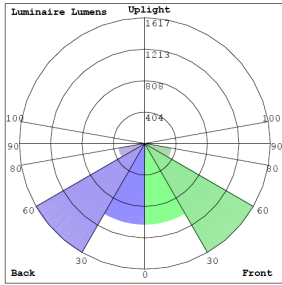

BUG Rating: B3-U0-G1

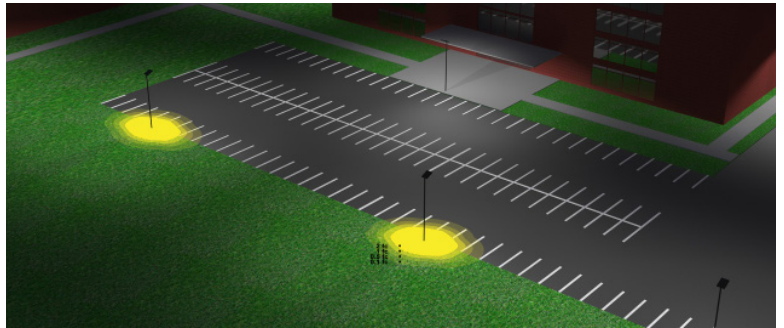

Area 45'x 155' Mounting Height: 20'


Other Views:



Side View



Front View



Back View

Performance Table: LFX-MD-15-50W-MCTP-KN-BK

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LFX-MD-15-50W-MCTP-KN-BK	15W	120~277V	1950LM	3000K 4000K 5000K 5700K	B3-U0-G1	130
	20W		2600LM			
	30W		3900LM			
	50W		6500LM			



Sample Ordering

Model	Size	Min.Wattage	Max.Wattage	Color Temp.	Mount	Housing
LFX	MD	15	50W	MCTP	KN	BK

Accessories Options

Blank = No Option For Accessories
 WRC-3-BRZ = Weatherproof cover with three(3) 1/2" hubs
 LF3-SH2 = Shroud for LF3 50W Reversible
 LF3-SH2FG = Full-Glare Shroud for LF3 50W

ACCESSORIES AND MOUNTING OPTIONS



WRC-3-BRZ
Weatherproof cover with Three (3) 1/2" hubs (Can be painted)



B-41
(Can be painted)
Mounts to landscape post or any 1/2" hub



Fully adjustable 1/2" threaded knuckle for aiming versatility



LF3-SH2
Shroud (Reversible)



LF3-SH2FG
Full-Glare Shroud

Color Options: Custom Color Available

Black Silver White **Dark Bronze** Green Red Yellow
Default color



Example:

1. LFX-MD-15-50W-MCTP-KN-BK
2. LFX-MD-15-50W-MCTP-KN-BK
WRC-3-BRZ

(For LFX 15-50W MCTP fixture 120V-277V)

(For LFX 15-50W MCTP fixture 120V-277V)
(Weatherproof cover with three(3) 1/2" hubs)

