


# LFX-SM SERIES Outdoor Lighting

LFX-SM-10-30W-MCTP-KN-SV

**MCTP** Multi Color Temperature & Multi Power/Wattage (Selectable)

**WESTGATE**  
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!




Ideal for general site lighting, alleys, loading docks, doorway, pathway, and parking areas.

Customer Name: \_\_\_\_\_

Project Name: \_\_\_\_\_

Note: \_\_\_\_\_

Type: \_\_\_\_\_

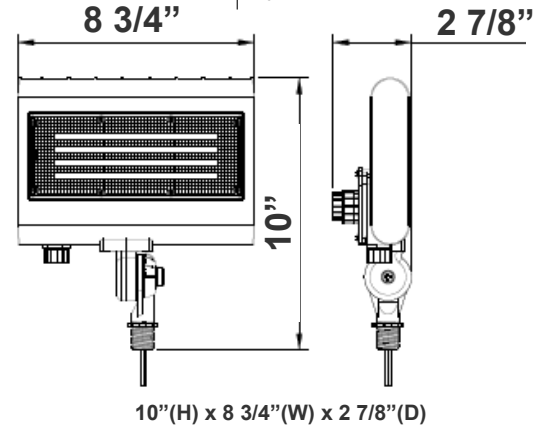

## Features

- DLC Premium & LED High-Lumen Floor lights
- Solid State Lighting Technology for Long Life
- No Maintenance Needed and High-Efficiency
- 7-Year Warranty
- 70,000 Hours Rated Life
- Optic Lens Type: III
- Multi-CCT Power - The Switch is on the Bottom of the Fixture

## Technical Specifications

### Electrical:

- Voltage: 120~277V AC/50~60 Hz
- Wattage: 10W/ 15W/ 20W/ 30W
- Power Factor: >0.9
- Efficacy: 130 LPW

### Mechanical:

- Die-cast Aluminum Housing with Powder Coat Finish (Silver Finish)
- LED: Lumileds Luxeon 2835 High Flux LED
- Solid State Lighting technology for long life, no Maintenance needed and High-Efficiency
- High Conductive Aluminum LED Board
- 90° Adjustable 1/2" Knuckle Mount
- IP Rating: IP65
- Operating Temperature: -40°F to 104°F
- Suitable for Wet Locations

### Lighting:

- Dimming: 0~10V Dimmable
- Optic Lens Type: III
- Cord type: 13" #18 AWG stranded wires
- Multi-CCT Power - The Switch is on the Bottom of the Fixture
- Total Lumens: 3900LM Max.
- Color Temperature: 3000K/ 4000K/ 5000K/ 5700K
- Color Rendering Index: ≥ 82
- Beam Angle: 120°X 90°

### Applications:

- Ideal for general site lighting, alleys, loading docks, doorway, pathway and parking areas.
- Replace existing HID flood lights/ wall packs

### Other Models:



• 30W | 3900LM | LFX-SM-10-30W-MCTP-KN-WH • 30W | 3900LM | LFX-SM-10-30W-MCTP-KN • 30W | 3900LM | LFX-SM-10-30W-MCTP-BK




Phone: (877) 805-2252 | Fax: (877) 805-2252  
www.westgatemfg.com |



**Photometrics:** LFX-SM-10-30W-MCTP-KN-SV

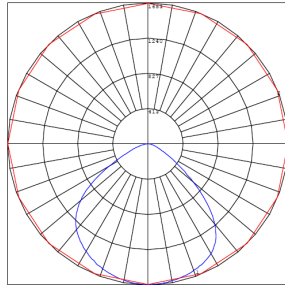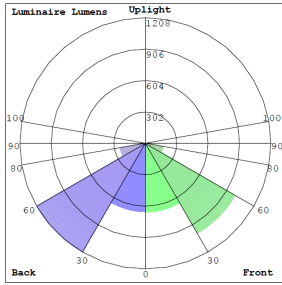

BUG Rating: B2-U0-G1

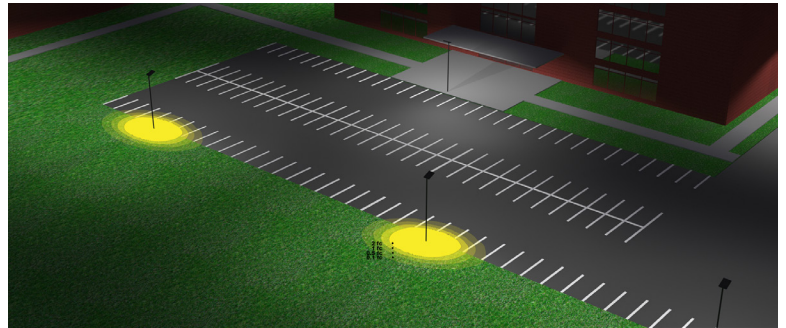

Area 40'x 50' Mounting Height: 20'


**Other Views:**



Side View



Front View

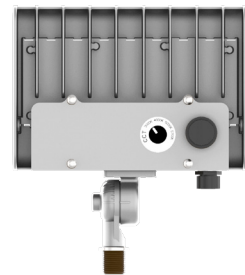

Back View

**Performance Table:** LFX-SM-10-30W-MCTP-KN-SV

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LFX-SM-10-30W-MCTP-KN-SV	10W	120~277V	1210LM	3000K 4000K 5000K 5700K	B2-U0-G1	130
			1250LM			
			1280LM			
	15W		1800LM			
			1880LM			
			1930LM			
	20W		1930LM			
			2340LM			
			2400LM			
			2500LM			
			2500LM			
			3830LM			
	30W		3880LM			
			3880LM			
			3900LM			



# Sample Ordering

**Model**    **Size**    **Min.Wattage**    **Max.Wattage**    **Color Temp.**    **Mount**    **Housing**  
 LFX - SM - 10 - 30W - MCTP - KN - SV

## Accessories Options

Blank = No Option For Accessories

WRC-3-BRZ =Weatherproof cover with three(3) 1/2" hubs

## ACCESSORIES AND MOUNTING OPTIONS



WRC-3-BRZ  
Weatherproof cover with  
Three  
(3) 1/2" hubs  
(Can be painted)



B-41  
(Can be painted)



Mounts to landscape  
post  
or any 1/2" hub



Fully adjustable 1/2"  
threaded knuckle for aiming  
versatility

## Color Options: Custom Color Available

Black    Silver    White    **Dark Bronze**    Green    Red    Yellow  
Default color

