

LFX-SM SERIES Outdoor Lighting

LFX-SM-10-30W-MCTP-KN-WH

MCTP Multi Color Temperature & Multi Power/Wattage (Selectable)



Ideal for general site lighting, alleys, loading docks, doorway, pathway, and parking areas.

WESTGATE


THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

Customer Name: _____

Project Name: _____

Note: _____

Type: _____

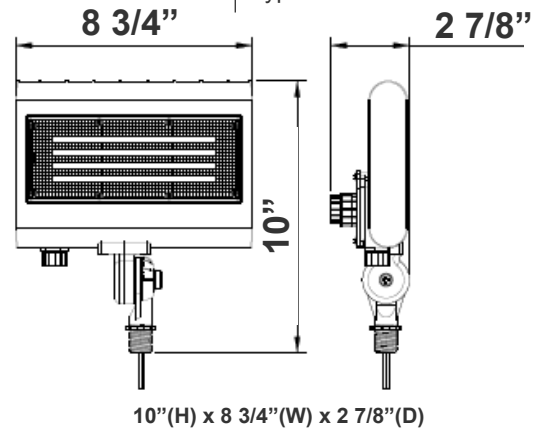

10"(H) x 8 3/4"(W) x 2 7/8"(D)

Features

- DLC Premium & LED High-Lumen Floor lights
- Solid State Lighting Technology for Long Life
- No Maintenance Needed and High-Efficiency
- 7-Year Warranty
- 70,000 Hours Rated Life
- Optic Lens Type: III
- Multi-CCT Power - The Switch is on the Bottom of the Fixture

Technical Specifications

Electrical:

- Voltage: 120~277V AC/50~60 Hz
- Wattage: 10W/ 15W/ 20W/ 30W
- Power Factor: >0.9
- Efficacy: 130 LPW

Mechanical:

- Die-cast Aluminum Housing with Powder Coat Finish (White Finish)
- Solid State Lighting technology for long life, no Maintenance needed and High-Efficiency
- High Conductive Aluminum LED Board
- 90° Adjustable 1/2" Knuckle Mount
- IP Rating: IP65
- Operating Temperature: -40°F to 104°F
- Suitable for Wet Locations

Lighting:

- Dimming: 0~10V Dimmable
- Optic Lens Type: III
- Cord type: 13" #18 AWG stranded wires
- Multi-CCT Power - The Switch is on the Bottom of the Fixture
- Total Lumens: 3900LM Max.
- Color Temperature: 3000K/ 4000K/ 5000K/ 5700K
- Color Rendering Index: ≥ 82
- Beam Angle: 120°X 90°

Applications:

- Ideal for general site lighting, alleys, loading docks, doorway, pathway and parking areas.
- Replace existing HID flood lights/ wall packs

Other Models:

• 30W | 3900LM | LFX-SM-10-30W-MCTP-KN-SV • 30W | 3900LM | LFX-SM-10-30W-MCTP-KN • 30W | 3900LM | LFX-SM-10-30W-MCTP-BK




Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatetmfg.com |




WG-ZB-Y6-2Z

Photometrics: LFX-SM-10-30W-MCTP-KN-WH

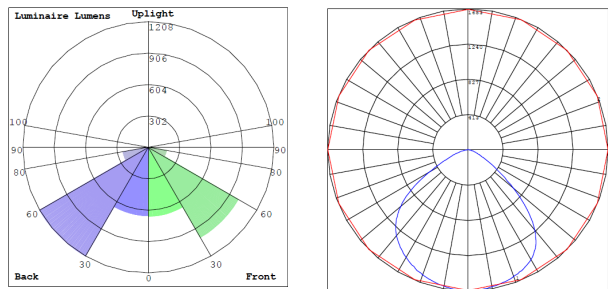

BUG Rating: B2-U0-G1

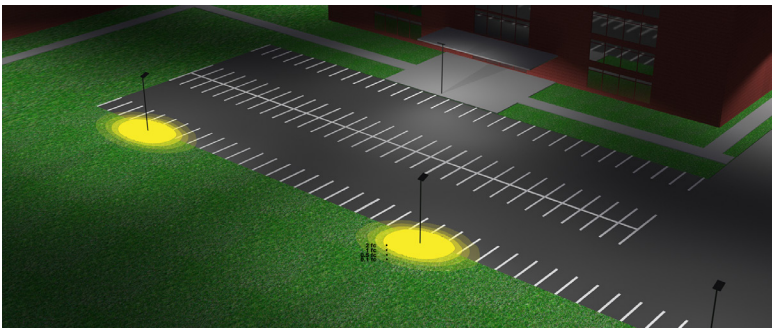

Area 40'x 50' Mounting Height: 20'


Other Views:



Side View



Front View



Back View

Performance Table: LFX-SM-10-30W-MCTP-KN-WH

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LFX-SM-10-30W-MCTP-KN-WH	10W	120~277V	1210LM	3000K 4000K 5000K 5700K	B2-U0-G1	130
			1250LM			
			1280LM			
			1280LM			
	15W		1800LM			
			1880LM			
			1930LM			
			1930LM			
	20W		2340LM			
			2400LM			
			2500LM			
			2500LM			
	30W		3830LM			
			3880LM			
			3880LM			
			3900LM			



Sample Ordering

Model	Size	Min.Wattage	Max.Wattage	Color Temp.	Mount	Housing
LFX	SM	10	30W	MCTP	KN	WH

Accessories Options

Blank = No Option For Accessories

WRC-3-BRZ =Weatherproof cover with three(3) 1/2" hubs

ACCESSORIES AND MOUNTING OPTIONS



WRC-3-BRZ
Weatherproof cover with
Three
(3) 1/2" hubs
(Can be painted)



B-41
(Can be painted)



Mounts to landscape
post
or any 1/2" hub



Fully adjustable 1/2"
threaded knuckle for aiming
versatility

Color Options: Custom Color Available

Black Silver White Dark Bronze Green Red Yellow
Default color



Example:

1. LFX-SM-10-30W-MCTP-KN-WH

(For LFX 10-30W MCTP fixture 120V-277V)

2. LFX-SM-10-30W-MCTP-KN-WH
WRC-3-BRZ

(For LFX 10-30W MCTP fixture 120V-277V)
(Weatherproof cover with three(3) 1/2" hubs)

