

LFX-SM SERIES

Outdoor Lighting

LFX-SM-10-30W-30K-TR

LFX-SM-10-30W-40K-TR

LFX-SM-10-30W-50K-TR

 Multi Power/Wattage (Selectable)



Ideal for general site lighting, alleys, loading docks, doorway, pathway, and parking areas.


WESTGATE
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

Customer Name: _____

Project Name: _____

Note: _____

Type: _____

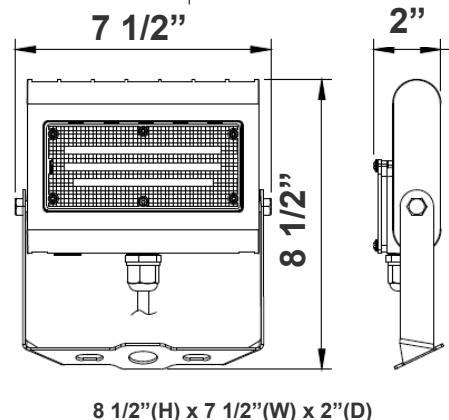

Features

- DLC Premium & LED High-Lumen Flood lights
- Solid State Lighting Technology for Long Life
- No Maintenance Needed and High-Efficiency
- 70,000 Hours Rated Life

- 7-Year Warranty
- Optic Lens Type: III
- Multi-Power - The Switch is On the Bottom of the Fixture

Technical Specification

Electrical:

- Voltage: 120~277V AC/50~60 Hz
- Wattage: Selectable Wattages (10W/ 15W/ 20W/ 30W)
- Power Factor: >0.9
- Efficacy: 130 LP

Mechanical:

- Die-cast Aluminum Housing with Powder Coat Finish (Dark Bronze and White Finish)
- Solid State Lighting technology for long life, no Maintenance needed and High-Efficiency
- High Conductive Aluminum LED Board
- 270° Adjustable Yoke Mount
- IP Rating: IP65
- Operating Temperature: -40°F to 104°F
- Suitable for Wet Locations

Lighting:

- Dimming: 0~10V Dimmable
- Optic Lens Type: III
- Cord type: 13" #18 AWG stranded wires
- Total Lumens: 4080LM Max.
- Color Temperature: 3000K/ 4000K/ 5000K
- Color Rendering Index: ≥ 82
- Beam Angle: 120°X 90°

Applications:

- Ideal for general site lighting, alleys, loading docks, doorway, pathway and parking areas.
- Replace existing HID flood lights/ wall pack

Other Models:

- 50W | 6700LM | LFX-MD-15-50W-30K-TR
- 50W | 6700LM | LFX-MD-15-50W-40K-TR
- 50W | 6700LM | LFX-MD-15-50W-50K-TR




Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com |



WG-ZB-Y6-22



Photometrics: LFX-SM-10-30W-TR



BUG Rating: B2-U0-G1

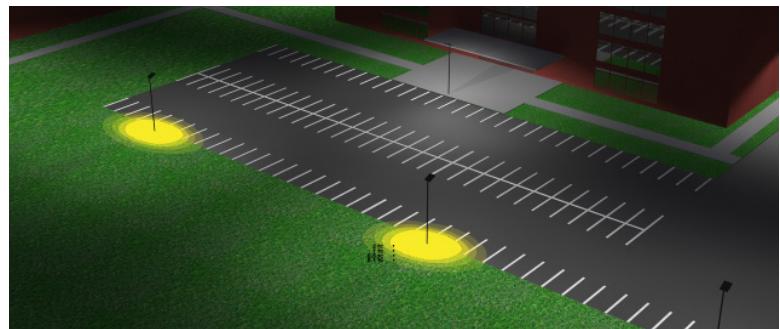

Area 40'x 50' Mounting Height: 20'


Other Views:



Side View



Front View



Back View

Performance Table: LFX-SM-10-30W-TR

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LFX-SM-10-30W-30K-TR	10W		1300LM			
LFX-SM-10-30W-40K-TR	15W	120~277V	1950LM	3000K 4000K 5000K	B2-U0-G1	130
LFX-SM-10-30W-50K-TR	20W		2600LM			
	30W		3900LM			



Sample Ordering

Model	Size	Min.Wattage	Max.Wattage	Color Temp.	Mount
LFX	SM	10	30W		TR
<small>30K = 3000K 40K = 4000K 50K = 5000K</small>					

Accessories Options



Blank = No Option For Accessories

WRC-3-BRZ = Weatherproof cover with three(3) 1/2" hubs

LF3-SH1 = Shroud for LF3 50W Reversible

LF3-SH1FG = Full-Glare Shroud for LF3 SM

ACCESSORIES AND MOUNTING OPTIONS



LF3-SH1
Shroud (Reversible)



LF3-SH1FG
Full-Glare Shroud

Color Options: Custom Color Available

Black Silver White Dark Bronze
Default color Green Red Yellow

