

# LFX-XS SERIES Outdoor Lighting

LFX-XS-15W-30K-TR

LFX-XS-15W-40K-TR

LFX-XS-15W-50K-TR

**MP** Multi Power/Wattage (Selectable)



Ideal for general site lighting, alleys, loading docks, doorway, pathway, and parking areas.


**WESTGATE**  
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

Customer Name: \_\_\_\_\_

Project Name: \_\_\_\_\_

Note: \_\_\_\_\_

Type: \_\_\_\_\_

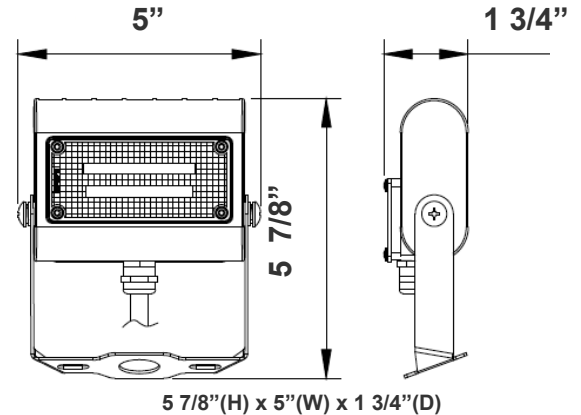

## Features

- DLC Premium & LED High-Lumen Flood lights
- Solid State Lighting Technology for Long Life
- No Maintenance Needed and High-Efficiency
- 70,000 Hours Rated Life
- 7-Year Warranty
- Optic Lens Type: III

## Technical Specifications

### Electrical:

- Voltage: 120~277V AC/50~60 Hz
- Wattage: 15W
- Power Factor: >0.9
- Efficacy: 130 LPW

### Mechanical:

- Die-cast Aluminum Housing with Powder Coat Finish (Dark Bronze and White Finish)
- Solid State Lighting technology for long life, no Maintenance needed and High-Efficiency
- High Conductive Aluminum LED Board
- 270° Adjustable Yoke Mount
- IP Rating: IP65
- Operating Temperature: -40°F to 104°F
- Suitable for Wet Locations

### Lighting:

- Dimming: 0~10V Dimmable
- Optic Lens Type: III
- Cord type: 13" #18 AWG stranded wires
- Total Lumens: 1950LM
- Color Temperature: 3000K/ 4000K/ 5000K
- Color Rendering Index: ≥ 82
- Beam Angle: 120°X 90°

### Applications:

- Ideal for general site lighting, alleys, loading docks, doorway, pathway and parking areas.
- Replace existing HID flood lights/ wall packs

### Other Models:



- 30W | 3900LM | LFX-SM-10-30W-30K-TR
- 30W | 3900LM | LFX-SM-10-30W-50K-TR
- 50W | 6500LM | LFX-MD-15-50W-30K-TR
- 50W | 6500LM | LFX-MD-15-50W-50K-TR




Phone: (877) 805-2252 | Fax: (877) 805-2252  
www.westgatemfg.com |



## Photometrics: LFX-XS-15W-TR

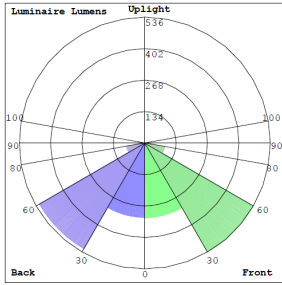

BUG Rating: B1-U0-G0

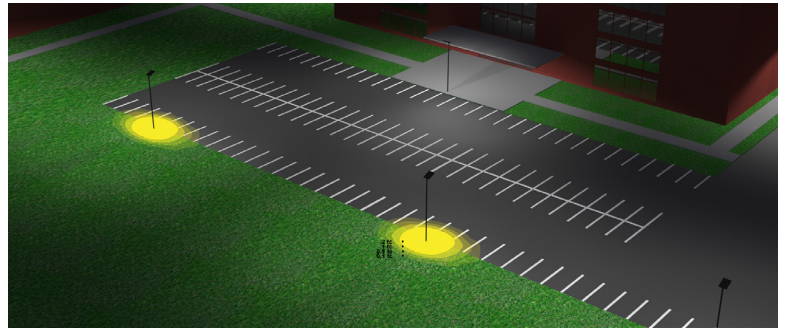


Area 30'x 45' Mounting Height: 20'


## Other Views:



Side View



Front View



Back View

## Performance Table: LFX-XS-15W-TR

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LFX-XS-15W-30K-TR LFX-XS-15W-40K-TR LFX-XS-15W-50K-TR	15W	120~277V	1950	3000K 4000K 5000K	B1-U0-G0	130

## Sample Ordering

Model	Size	Wattage	Color Temp.	Mount
LFX	XS	15W		TR

30K = 3000K  
40K = 4000K  
50K = 5000K

## Accessories Options

Blank = No Option For Accessories

WRC-3-BRZ = Weatherproof cover with three(3) 1/2" hubs

LF3-SH1 = Shroud for LF3 50W Reversible

LF3-SH1FG = Full-Glare Shroud for LF3 SM

## ACCESSORIES AND MOUNTING OPTIONS



LF3-SH1  
Shroud (Reversible)



LF3-SH1FG  
Full-Glare Shroud

