

LFXMAX SERIES Outdoor Lighting

LFXMAX-XXL-250-450W-MCTP-PSR-480V

LFXMAX SPEC SERIES MAXIMUM-FEATURE AREA/FLOOD LIGHT, SENSOR & PHOTOCELL READY

MCTP Multi Color Temperature & Multi Power/Wattage (Selectable)

WESTGATE

THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!




Customer Name: _____

Project Name: _____

Note: _____

Type: _____

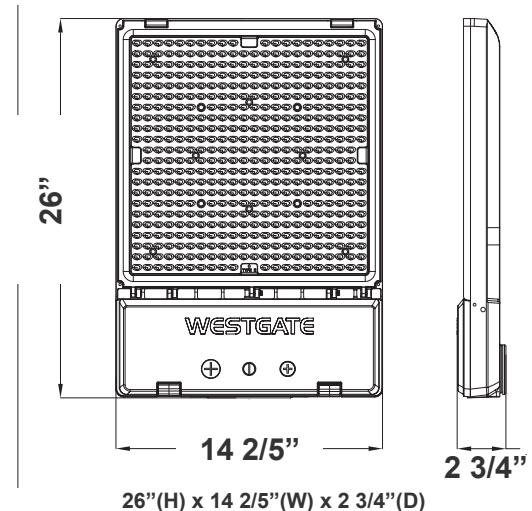

the LFXMAX Flood Light by Westgate: compatible with all LFX mounts, featuring a rotatable lens for precise lighting, a selection of lens types, and adjustable wattage and CCT. Perfect for versatile, efficient lighting solutions.

Features

- DLC Premium & LED High-Lumen Flood lights
- Solid State Lighting Technology for Long Life
- No Maintenance Needed and High-Efficiency
- 7-Year Warranty
- Optic Lens Type: III
- Multi-Power - The Switch is On the Bottom of the Fixture

Technical Specifications

Electrical:

- Voltage: 480V AC/50~60 Hz
- Wattage: 250W/350W/450W
- Power Factor: >0.9
- Efficacy: 145 LPW

Mechanical:

- With Snap-on & Bolt Mounting Options for One- Person Installations. Select a Mounting Option (Sold Separately)
- LED: Lumileds Luxeon 2835 High Flux LED
- Die-cast Aluminum Housing with Powder Coat Finish (Dark Bronze)
- Cord Type: 6' SJTW 18/3 AWG cable
- 10KV Lightning Surge Protection
- Effective Projected Areas (EPA's) are: Front = 0.38 ft², Side = 0.30 ft², Face = 1.05 ft²
- Operating Temperature: -40°F to 104°F
- IP Rating: IP65, Suitable for Wet Locations
- 7-Year Warranty

Lighting:

- Dimming: 0~10V Dimmable
- Optic Lens Type: III
- Cord Type: 6' SJTW 18/3 AWG cable
- Total Lumens: 65250LM Max.
- Color Temperature: 3000K/4000K/5000K
- Color Rendering Index: ≥ 80
- Beam Angle: 155°x75° Type III
- 70,000 Hours Rated Life

Applications:

- Ideal for general site lighting, alleys, loading docks, doorway, pathway and parking areas.
- Replace existing HID flood lights/ wall packs

Other Models:

- 150W | 21400LM | LFXMAX-LG-70-150W-MCTP-PSR-480V





Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com |




WG-ZB-Y6-2Z

Photometrics: LFXMAX-XXL-250-450W-MCTP-480V



BUG Rating: B3-U0-G3

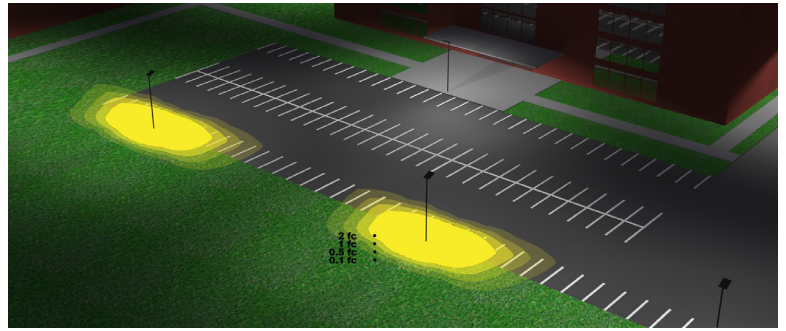

Area 55'x 100' Mounting Height: 20'

Other Views:



Side View



Front View



Back View

Performance Table: LFXMAX-XXL-250-450W-MCTP-480V

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LFXMAX-XXL-250-450W-MCTP-480V	250W 350W 450W	480V	36250LM 50750LM 65250LM	3000K 4000K 5000K	B3-U0-G3	145

Sample Ordering

Model	Size	Min.Watt	Max.Watt	Color Temp.	Feature	Volt
LFXMAX	XXL	250	450W	MCTP	PSR	480V

Factory Installed Options

Blank = No Factory Installed Options

PC-TWIST = 120-227V Twist Lock Photocell

WEC-3PR-78-AJ-WH = PIR Bi-Level Motion Sensor

WEC-3PBT-78-AJ-WH = Smart Bluetooth PIR Bi-Level Motion Sensor, Req. Westgate Smart

Phone APP

LFXMAX-XXL-LENS-T4 = LFXMAX-XXL Type 14 Lens

LEXMAX-XXL-LENS-T5 = LFXMAX-XXL Type T5 Lens

WEC-3RC = Remote Control

SENSOR AND REMOTE CONTROL OPTIONS



WEC-3PR-78-AJ-WH
WEC-3PBT-78-AJ-WH



PC-TWIST-480V




WEC-3RC
Remote control

EPA Rating:

Model	0.8	1.25	1.44	1.89	1.7	2.34
LFX-XL						



Mounting Options:

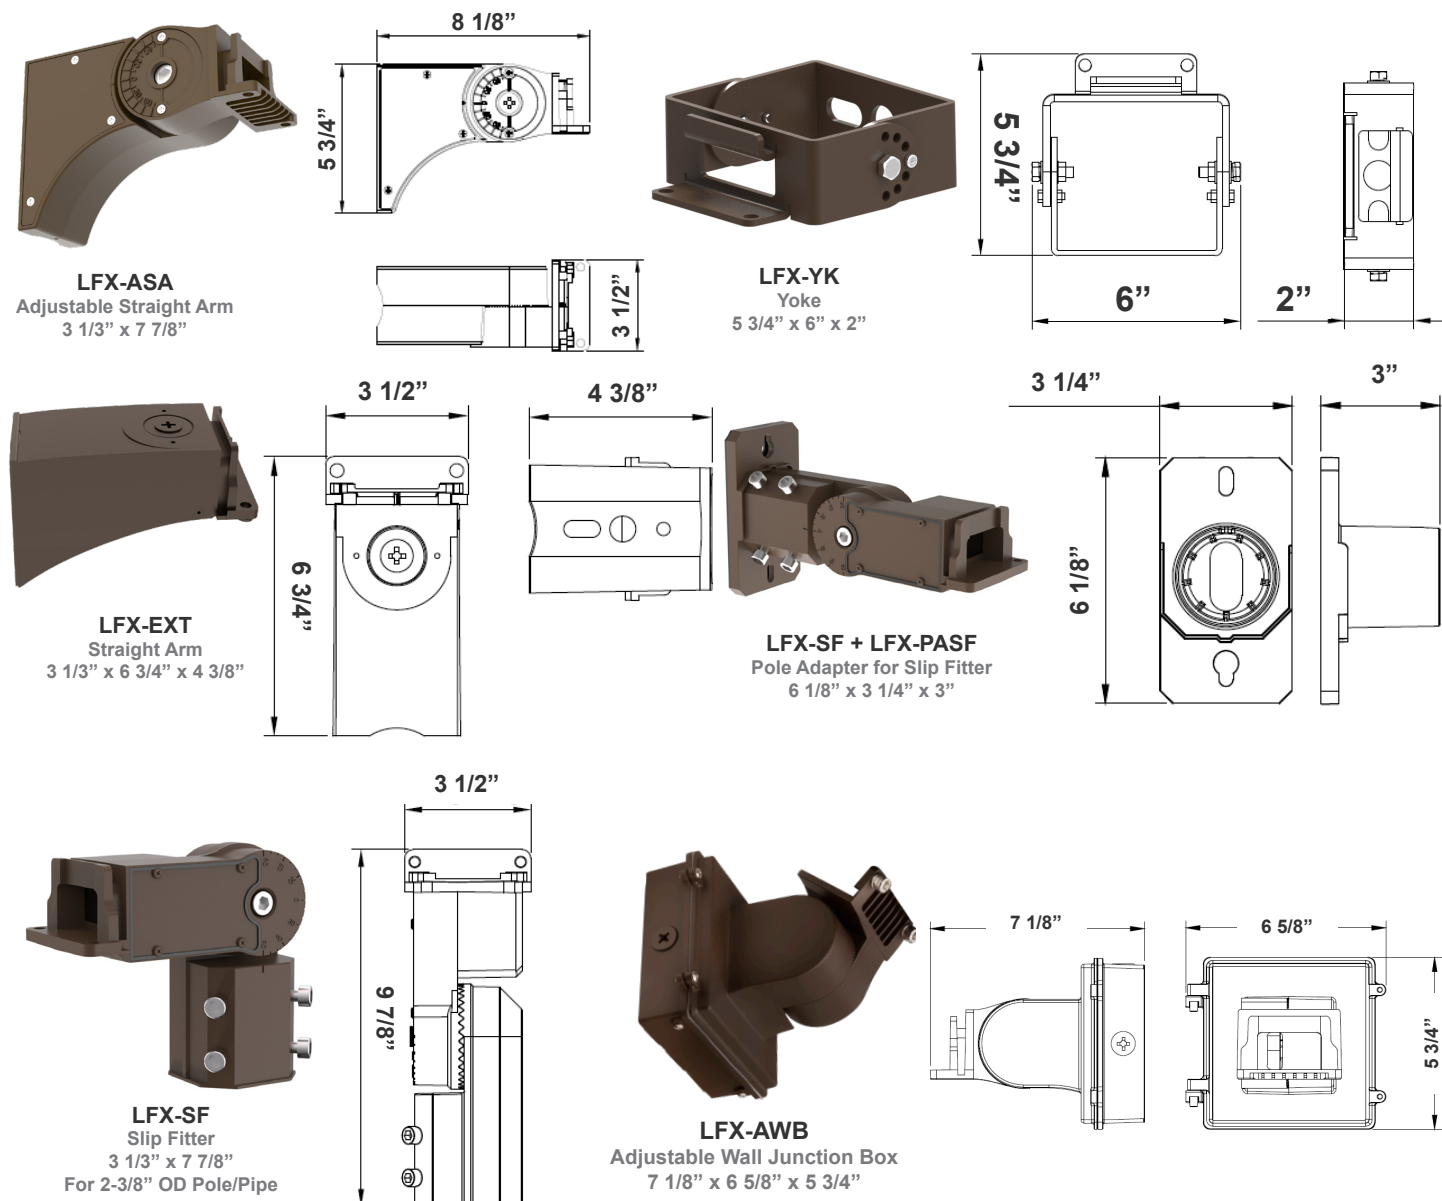

Type Lenses:





T4



T5





Type Lenses:

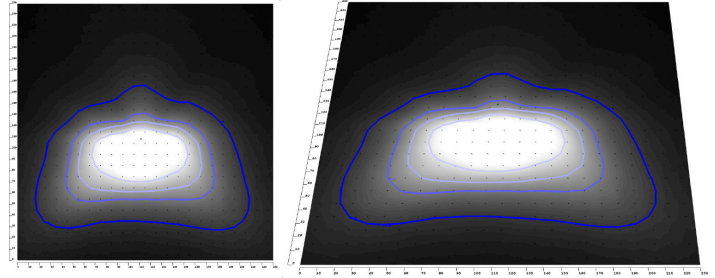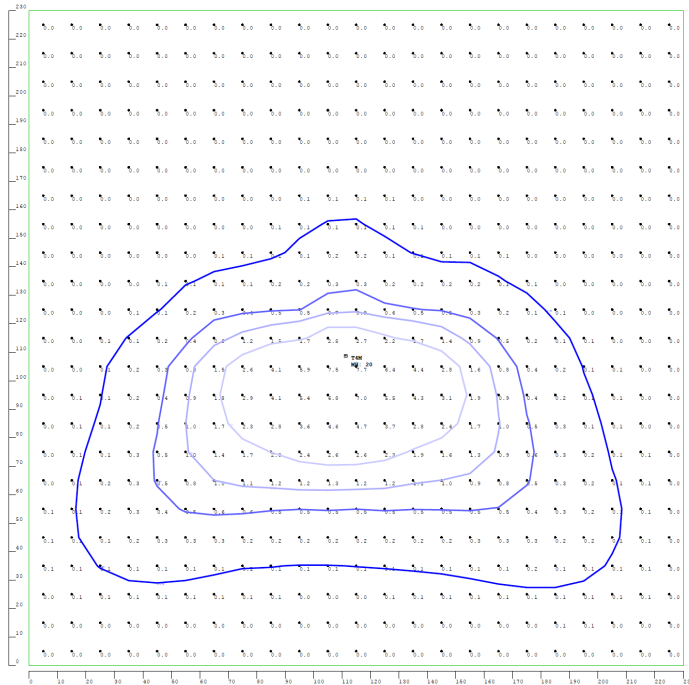

LFXMAX-XXL-LENS-T4 LFMAX-XXL Type T4 Lens

- Gives Asymmetrical Light Distribution
- Great For Pathways And Parking Lots
- Minimizes Light Spill Onto Nearby Areas

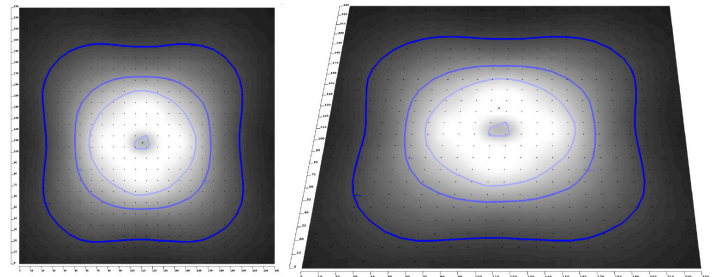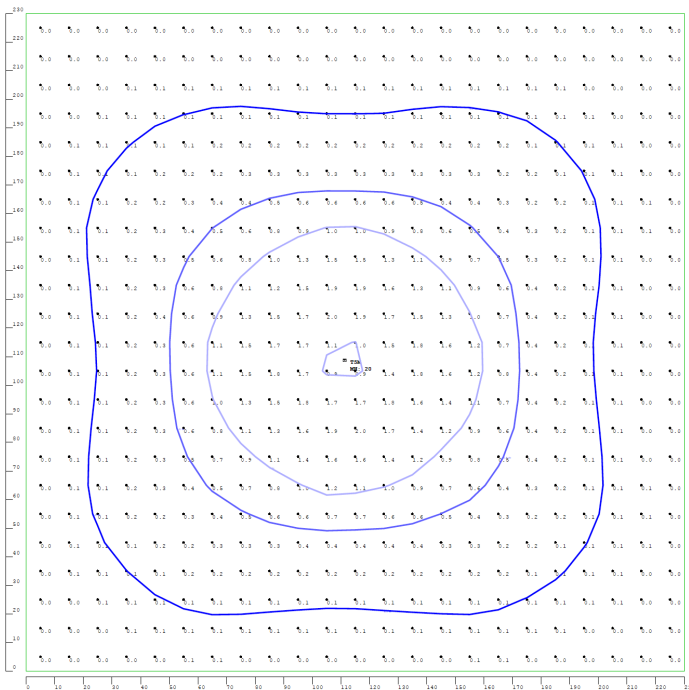

LFXMAX-XXL-LENS-T5 LFMAX-XXL Type T5 Lens

- Provides A Very Wide And Even Spread Of Light
- Perfect For Large Open Spaces Like Sports Fields
- Ensures Comprehensive Coverage

